


WORKBOOK 2026



BPM LIGHTING

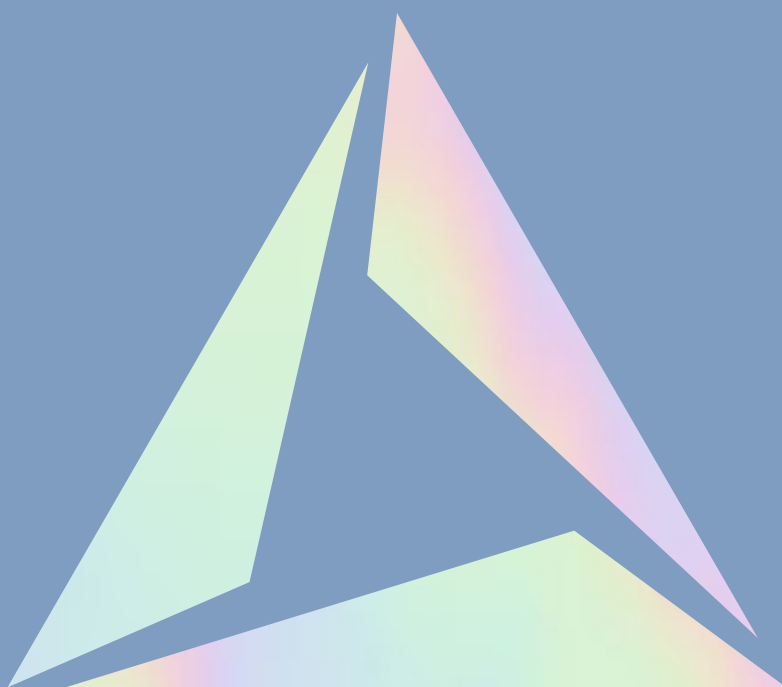

© BPM Iluminación, S.L., 2026

ALL RIGHTS RESERVED.

No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means — electronic, mechanical, photocopying, recording or otherwise — without the prior written permission of BPM Iluminación, S.L.

BPM Lighting reserves the right to modify technical specifications, finishes and product features without prior notice.

TODOS LOS DERECHOS RESERVADOS.

Ninguna parte de esta publicación puede ser reproducida, almacenada o transmitida en cualquier forma o por cualquier medio, ya sea electrónico, mecánico, fotocopia, grabación o cualquier otro, sin el consentimiento previo y por escrito de BPM Iluminación, S.L.

BPM Lighting se reserva el derecho de modificar especificaciones técnicas, acabados y características de los productos sin previo aviso.

Design and Creative Direction: BPM Lighting

Published by: BPM Iluminación, S.L.

Diseño y dirección creativa: BPM Lighting

Edición: BPM Iluminación, S.L.

Printed by: DPrint

Printed in Spain · Made in Spain

Impresión: DPrint

Impreso en España · Made in Spain



Avda. de Valencia 52
03770 El Verger
Alicante, Spain


Tel. +34 **965 781 218**
info@bpmlighting.com
www.bpmlighting.com

GENERAL INDEX

DECORATIVE



WALL LIGHTS

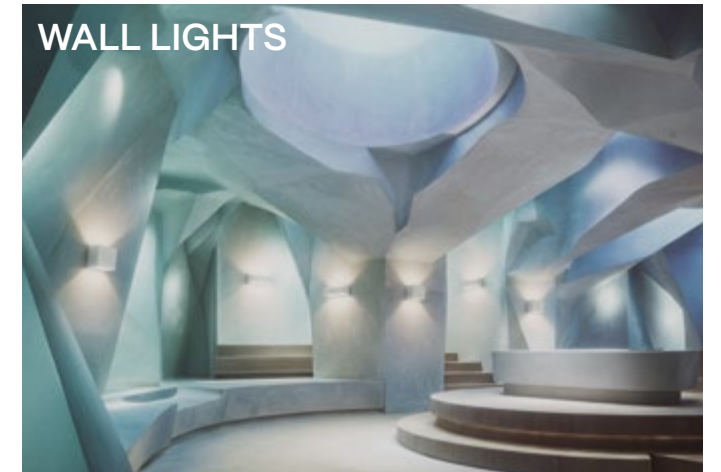


LUMINAIRES




ACOUSTIC



OUTDOOR

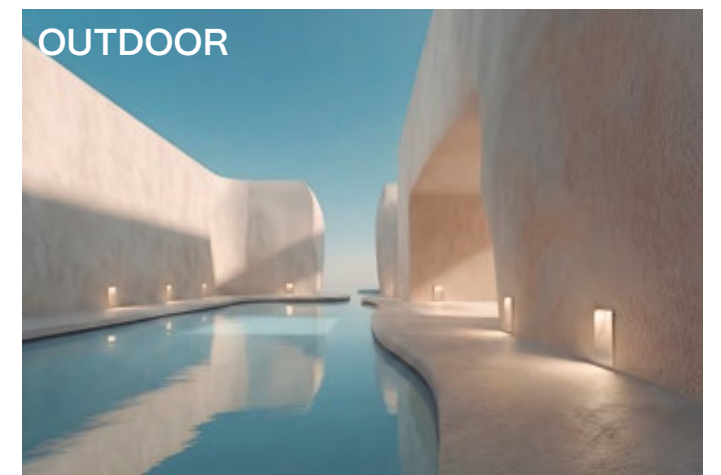

CRISMOSIL

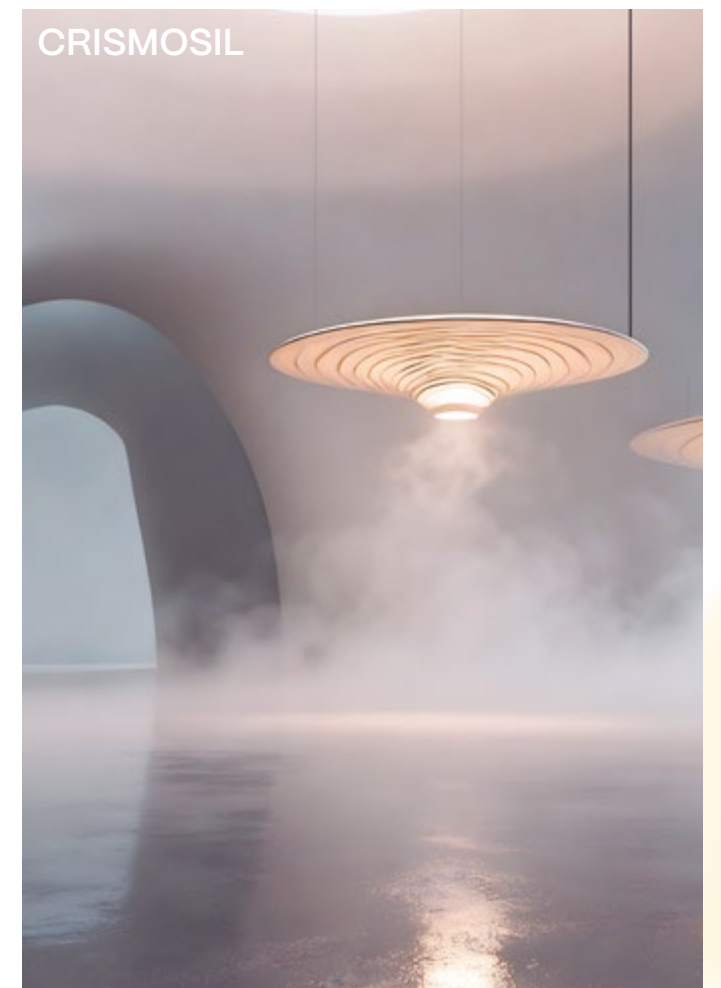

LINEAR SYSTEMS



SPOTLIGHTS



- 42 | LUMINAIRES
- 160 | LINEAR SYSTEMS
- 260 | SPOTLIGHTS
- 372 | DECORATIVE
- 402 | WALL LIGHTS
- 420 | ACOUSTIC
- 456 | OUTDOOR
- 466 | CRISMOSIL
- 558 | TECHINCAL INFO



LUMINAIRES

ALBERTA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW	ALBERTA SOFT CONNECT REF. 141 PAG. 48					
NEW	ALBERTA SLIGHT CONNECT REF. 126 PAG. 52					
NEW	ALBERTA SOFT STONE REF. 144 PAG. 56					
NEW	ALBERTA SOFT LOOP REF. 142 PAG. 60					
NEW	ALBERTA INSIDE HAT REF. 123 PAG. 64					
	ALBERTA SLIGHT ECCENTRIC REF. 127 PAG. 68					
NEW	ALBERTA SOFT OUTSIDE REF. 143 PAG. 72					
NEW	ALBERTA OUTSIDE REF. 124 PAG. 76					
	ALBERTA INSIDE REF. 122 PAG. 80					
	ALBERTA DUE REF. 121 PAG. 84					
	ALBERTA SOFT REF. 140 PAG. 88					
	ALBERTA SLIGHT REF. 125 PAG. 92					
	ALBERTA REF. 120 PAG. 96					

LUMINAIRES

FLORIDA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW	FLORIDA DECO REF. 161 PAG. 102					
	FLORIDA REF. 160 PAG. 106					
	FLORIDA SQ REF. 162 PAG. 110					

ALABAMA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW	ALABAMA STONE REF. 105 PAG. 116					
NEW	ALABAMA LOOP REF. 101 PAG. 120					
	ALABAMA REF. 100 PAG. 124					
	ALABAMA SLIGHT REF. 102 PAG. 128					
	ALABAMA SLIGHT SQ REF. 103 PAG. 132					
	ALABAMA SLIM REF. 104 PAG. 136					
	ALABAMA SUPER SLIM REF. 106 PAG. 140					

OHIO FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

	OHIO REF. 170 PAG. 146					
	OHIO SQ REF. 171 PAG. 150					

ALARIK SLIM LUMINAIRE

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW FAMILY	ALARIK SLIM LUMINAIRE REF. 175 PAG. 156					
------------	---	---	---	--	--	--



LINEAR SYSTEMS

ALARIK FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

ALARIK SLIM
REF. 230
PAG. 166

ALARIK MINI
REF. 200
PAG. 172

NEW
ALARIK NANO
REF. 215
PAG. 178



TRACKLIGHT

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW FAMILY
TRACKLIGHT
REF. ACC6684
PAG. 186



ALBA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW
ALBA MINI
REF. 251
PAG. 196

NEW
ALBA MINI AIO
REF. 253
PAG. 200

ALBA MINI MODULIGHT
REF. 280
PAG. 204

ALBA WING
REF. 290
PAG. 210

NEW
ALBA PRO
REF. 255
PAG. 214

ALBA PLUS
REF. 254
PAG. 220

ALBA DOUBLE
REF. 250
PAG. 224

ALBA LINGGO MINI
REF. 276
PAG. 228

ALBA LINGGO
REF. 275
PAG. 232



LINEAR SYSTEMS

FLY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW FAMILY
FLY
REF. 270
PAG. 238



VAULT

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

NEW FAMILY
VAULT
REF. 265
PAG. 244



OKKIA

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

OKKIA
REF. 287
PAG. 250



ALZIRA

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

ALZIRA
REF. 267
PAG. 256





SPOTLIGHTS

MARTORELL FAMILY

PENDANT

SURFACE

RECESSED WITH FRAME

TRIMLESS

TRACKLIGHT

WALL SURFACE

MARTORELL FLIP
REF. 337
PAG. 266



MARTORELL MOVE
REF. 339
PAG. 268



MARTORELL
REF. 335
PAG. 270



MARTORELL TUBE MOVE
REF. 345
PAG. 272



MARTORELL CRATE
REF. 336
PAG. 274



MARTORELL MINI CRATE
REF. 338
PAG. 276



MARTORELL SQ
REF. 340
PAG. 278



MARTORELL SQ DOUBLE
REF. 341
PAG. 278



MARTORELL TARREGA
REF. 342
PAG. 280



MARTORELL TUBULAR 20
REF. 346
PAG. 282



MARTORELL TUBULAR 40
REF. 347
PAG. 282



MARTORELL TUBULAR 60
REF. 348
PAG. 282



MARTORELL TUBULAR TILT
REF. 349
PAG. 282



PATRICIA

PENDANT

SURFACE

RECESSED WITH FRAME

TRIMLESS

TRACKLIGHT

WALL SURFACE

PATRICIA
REF. 355
PAG. 286



SPOTLIGHTS

KLIMT FAMILY

PENDANT

SURFACE

RECESSED WITH FRAME

TRIMLESS

TRACKLIGHT

WALL SURFACE

KLIMT
REF. 320
PAG. 292



KLIMT FIX
REF. 321
PAG. 294



CUBE FAMILY

PENDANT

SURFACE

RECESSED WITH FRAME

TRIMLESS

TRACKLIGHT

WALL SURFACE

CUBE
REF. 309
PAG. 298



CUBE DOUBLE
REF. 310
PAG. 298



CUBE TRIPLE
REF. 311
PAG. 298



CUBE TUBE
REF. 312
PAG. 300



CUBE TUBE
REF. 313
PAG. 300



CUBE TUBE MOVE
REF. 314
PAG. 302



CUBE TUBE MOVE
REF. 315
PAG. 302



LUK FAMILY

PENDANT

SURFACE

RECESSED WITH FRAME

TRIMLESS

TRACKLIGHT

WALL SURFACE

LUK CRUSADER
REF. 330
PAG. 306



LUK HAWKEYE
REF. 331
PAG. 307



LUK HAWKEYE DOUBLE
REF. 332
PAG. 307



ORACLE

PENDANT

SURFACE

RECESSED WITH FRAME

TRIMLESS

TRACKLIGHT

WALL SURFACE

ORACLE
REF. 354
PAG. 310





SPOTLIGHTS						
LENT FAMILY						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL SURFACE
LENT MODULAR REF. 324 / 325 PAG. 314						
LENT MOTION REF. 326 / 327 PAG. 318						
ASTRA						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL SURFACE
ASTRA REF. 302 PAG. 322						
VIO FAMILY						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL SURFACE
VIO REF. 370 PAG. 326						
VIO ASYMETRIC REF. 371 PAG. 326						
VIO COMPACT REF. 372 PAG. 326						
VIO DEEP REF. 373 PAG. 326						
VIO DEEP MOVE REF. 374 PAG. 326						
VIO DOME REF. 375 PAG. 326						
VIO DOME MOVE REF. 376 PAG. 326						
VIO MOVE REF. 378 PAG. 326						
VIO SQ REF. 379 PAG. 326						
VIO SQ MOVE REF. 380 PAG. 326						

SPOTLIGHTS						
SASSY FAMILY						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL SURFACE
SASSY REF. 360 PAG. 332						
SASSY SQ REF. 361 PAG. 334						
SASSY ROUND HOLE REF. 362 PAG. 332						
SASSY OVAL HOLE REF. 363 PAG. 332						
SASSY SNOOT REF. 364 PAG. 332						
ROY						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL SURFACE
ROY REF. 359 PAG. 338						
CAN REVIEW FAMILY						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL SURFACE
CAN REVIEW REF. 308 PAG. 342						
CAN REVIEW IP65 REF. 365 PAG. 344						
ALDAIA FAMILY						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL SURFACE
ALDAIA REF. 300 PAG. 348						
ALDAIA SQ REF. 301 PAG. 348						
VADI						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL SURFACE
VADI REF. 366 PAG. 352						



SPOTLIGHTS

KONI FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

KONI

REF. 388

PAG. 356

KONI DEEP

REF. 389

PAG. 358

KONI TURTA

REF. 390

PAG. 359



CATLI FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

CATLI

REF. 381

PAG. 362

CATLI SQ

REF. 385

PAG. 364

CATLI SQ DOUBLE

REF. 386

PAG. 366

CATLI CLASSIC

REF. 382

PAG. 368

CATLI CLASSIC SQ

REF. 383

PAG. 369

CATLI HALKA

REF. 384

PAG. 370



DECORATIVE

GALANTA FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

GALANTA DEEP

REF. 506

PAG. 378

GALANTA BONETE

REF. 505

PAG. 380



SUBLIM

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

SUBLIM

REF. 507

PAG. 384



VENISE

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

VENISE

REF. 508

PAG. 388



FACE FAMILY

PENDANT SURFACE RECESSED WITH FRAME TRIMLESS TRACKLIGHT WALL SURFACE

FACE TUBULAR

REF. 503

PAG. 392

FACE TUBULAR SPAC

REF. 504

PAG. 394

FACE IRIS

REF. 500

PAG. 396

FACE KIERA

REF. 501

PAG. 398

FACE KIERA CEMENT

REF. 502

PAG. 400



WALL LIGHTS						
FLAT FAMILY						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL SURFACE
NEW FAMILY						
						
HURY						
						
IKI						
						
KAPI						
						
KUU						
						
MAGRIT						
						
ADIMA FAMILY						
						
						
KLEE FAMILY						
						
						

ACOUSTIC						
ACOUSTIC FAMILY						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL SURFACE
ACOUSTIC ALBERTA SOFT REF. 556 PAG. 428						
ACOUSTIC ALABAMA REF. 557 PAG. 430						
ACOUSTIC ALABAMA SQ REF. 558 PAG. 430						
ACOUSTIC ALARIK SLIM REF. 555 PAG. 432						
ACOUSTIC ALBA MINI REF. 554 PAG. 436						
ACOUSTIC ALBA REF. 551 PAG. 438						
ACOUSTIC LAMBDA REF. 553 PAG. 442						
ACOUSTIC ALBA LINGGO MINI REF. 552 PAG. 444						
ACOUSTIC ALZIRA REF. 550 PAG. 448						
ACOUSTIC KLIMT FIX REF. 559 PAG. 450						
ACOUSTIC KLIMT FIX SQ REF. 560 PAG. 450						
ACOUSTIC ACCESORIES PAG. 454						
OUTDOOR						
WALL FAMILY						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL RECESSED
WALL ARA OUT REF. 685 PAG. 460						
WALL ZAHARA OUT REF. 686 PAG. 462						
WALL DRACO OUT REF. 687 PAG. 464						

CRISMOSIL

NUVOL

PENDANT

SURFACE

RECESSED WITH FRAME

TRIMLESS

TRACKLIGHT

WALL RECESSED

SOON

NUVOL

REF. 635

PAG. 472

WAVE FAMILY

PENDANT

SURFACE

RECESSED WITH FRAME

TRIMLESS

TRACKLIGHT

WALL RECESSED

NEW FAMILY

WAVE

REF. 665

PAG. 476

WAVE SOFT

REF. 664

PAG. 478

WAVE DOME

REF. 663

PAG. 479

SAND

PENDANT

SURFACE

RECESSED WITH FRAME

TRIMLESS

TRACKLIGHT

WALL RECESSED

NEW FAMILY

SAND

REF. 645

PAG. 482

MENORCA FAMILY

PENDANT

SURFACE

RECESSED WITH FRAME

TRIMLESS

TRACKLIGHT

WALL RECESSED

MENORCA DEEP STRAIGHT

REF. 625

PAG. 488

MENORCA DEEP TILT

REF. 626

PAG. 489

MENORCA DEEP WAVE

REF. 627

PAG. 490

MENORCA EDGE

REF. 628

PAG. 491

MENORCA FLAT

REF. 629

PAG. 492

MENORCA WHASER

REF. 630

PAG. 493

ALBA PRO CRISMOSIL

PENDANT

SURFACE

RECESSED WITH FRAME

TRIMLESS

TRACKLIGHT



WALL RECESSED

SOON

ALBA PRO CRISMOSIL

REF. 615

PAG. 494

CRISMOSIL						
ZENIT FAMILY						
	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL RECESSED
ZENIT REF. 670 PAG. 502						
ZENIT RING REF. 600 PAG. 503				NEW 		
ZENIT DEEP REF. 671 PAG. 504						
ZENIT DEEP 00 REF. 671 PAG. 504				NEW 		
ZENIT DEEP TWINS REF. 673 PAG. 506						
ZENIT MOVE REF. 674 PAG. 507						
ZENIT MOVE SQ REF. 675 PAG. 508						
ZENIT ORTO REF. 676 PAG. 509						
ZENIT SIDEREA REF. 677 PAG. 510						
ZENIT SIDEREA ASYMETRIC REF. 650 PAG. 512						
ZENIT SQ REF. 678 PAG. 514						
ZENIT STONE REF. 679 PAG. 515				NEW 		
ZENIT ZUBIA REF. 680 PAG. 516						
ZENIT ZUBIA SQ REF. 681 PAG. 517						



CRISMOSIL						
VEGA FAMILY	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL RECESSED
VEGA REF. 654 PAG. 520						
VEGA ADHARA REF. 655 PAG. 522						
VEGA TWINS REF. 656 PAG. 524						
VEGA ZETA REF. 657 PAG. 526						
ESPIGA FAMILY	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL RECESSED
ESPIGA SOFT REF. 660 PAG. 530						
ESPIGA REF. 610 PAG. 532						
ESPIGA SQ REF. 614 PAG. 534						
ESPIGA SIRIO REF. 612 PAG. 536						

ORBIT FAMILY						
ORBIT FAMILY	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL RECESSED
ORBIT REF. 641 PAG. 540						
ORBIT ARA REF. 642 PAG. 541						
ORBIR NADIR REF. 640 PAG. 542						

CRISMOSIL						
DRACO FAMILY	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL RECESSED
DRACO REF. 605 PAG. 546						
DRACO ORION REF. 606 PAG. 547						
DRACO WALL ORION REF. 662 PAG. 548						
DRACO TUCANA REF. 607 PAG. 550						
DRACO ZAHARA REF. 608 PAG. 551						

TYRA FAMILY						
TYRA FAMILY	PENDANT	SURFACE	RECESSED WITH FRAME	TRIMLESS	TRACKLIGHT	WALL RECESSED
TYRA REF. 652 PAG. 554						
TYRA LYRA REF. 624 PAG. 556						

LIGHT THAT INSPIRES, DESIGN THAT TRANSFORMS

LUZ QUE INSPIRA,
DISEÑO QUE TRANSFORMA

With over 50 years of experience from Denia (Costa Blanca), BPM Lighting creates architectural lighting solutions that blend cutting-edge technology, artisan processes, and a strong design focus.

Our flexible structure and innovative spirit allow us to offer custom-made luminaires tailored to each project's needs. We believe in light that brings well-being, identity, and sustainability.

Let's get brighter.

Con más de 50 años de experiencia desde Denia (Costa Blanca), en BPM Lighting creamos soluciones de iluminación arquitectural que combinan tecnología de vanguardia, procesos artesanales y una clara vocación por el diseño.

Nuestra estructura flexible y espíritu innovador nos permiten ofrecer luminarias personalizadas, adaptadas a las necesidades de cada proyecto. Apostamos por una luz que genera bienestar, identidad y sostenibilidad.

Let's get brighter.





A NEW HEADQUARTERS THAT REFLECTS WHO WE ARE

UNA NUEVA SEDE QUE REFLEJA NUESTRA ESENCIA

BPM Lighting's new headquarters in El Verger (Alicante) is much more than just a production facility; it's a living space that embodies our core values: innovation, design, proximity, and sustainability.

The new site includes a more efficient and sustainable production area, a curated showroom showcasing our collections and bespoke projects, and collaborative spaces designed to inspire dialogue with architects, designers, and lighting professionals.

This new chapter is also an experience. Our HQ is a place to host events, training sessions, and creative meetings, encouraging the exchange of ideas around light as a transformative force.

From El Verger, we continue lighting the future with creativity, precision, and a true passion for what we do.



La nueva sede de BPM Lighting en El Verger (Alicante) nace como un espacio vivo donde se materializan nuestros valores: innovación, diseño, proximidad y sostenibilidad.

Más allá de un centro productivo, es un entorno que inspira. Con una nueva área de fabricación más eficiente y sostenible, un showroom que presenta nuestras colecciones y proyectos a medida, y espacios concebidos para la co-creación con arquitectos, diseñadores y profesionales de la iluminación.



Queremos que esta nueva etapa sea también una experiencia. Por eso, nuestra sede está pensada para acoger eventos, formaciones y encuentros que fomenten el diálogo y el intercambio de ideas en torno a la luz como elemento transformador.

Desde El Verger, seguimos iluminando el futuro con creatividad, precisión y una profunda pasión por lo que hacemos.

LET'S GET
BRIGHTER

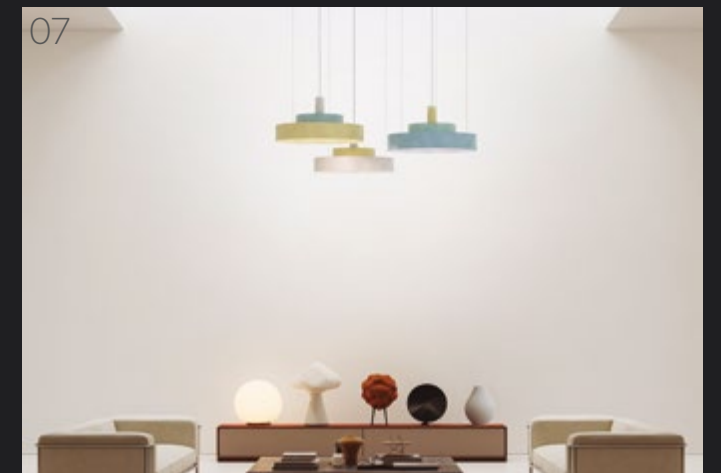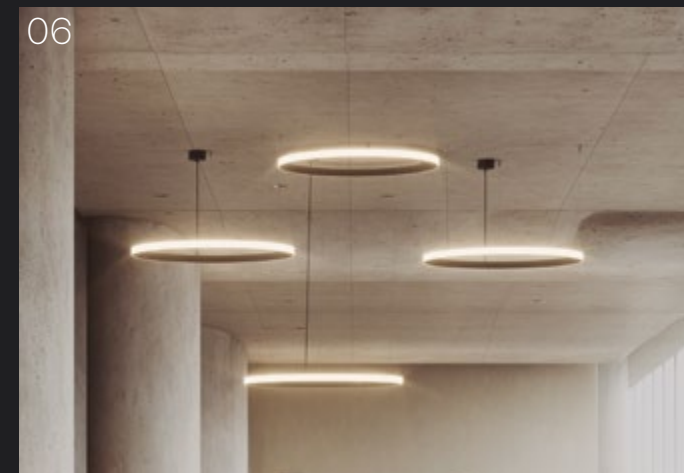

01 | ALARIK SLIM LUMINAIRE 02 | ALABAMA LOOP
03 | ALARIK NANO DOUBLE 04 | ALABAMA SLIGHT 05 | FLAT
06 | ALBERTA SOFT OUTSIDE 07 | FLORIDA DECO 08 | FLY
09 | NUVOL 10 | SAND 11 | ALBERTA INSIDE HAT

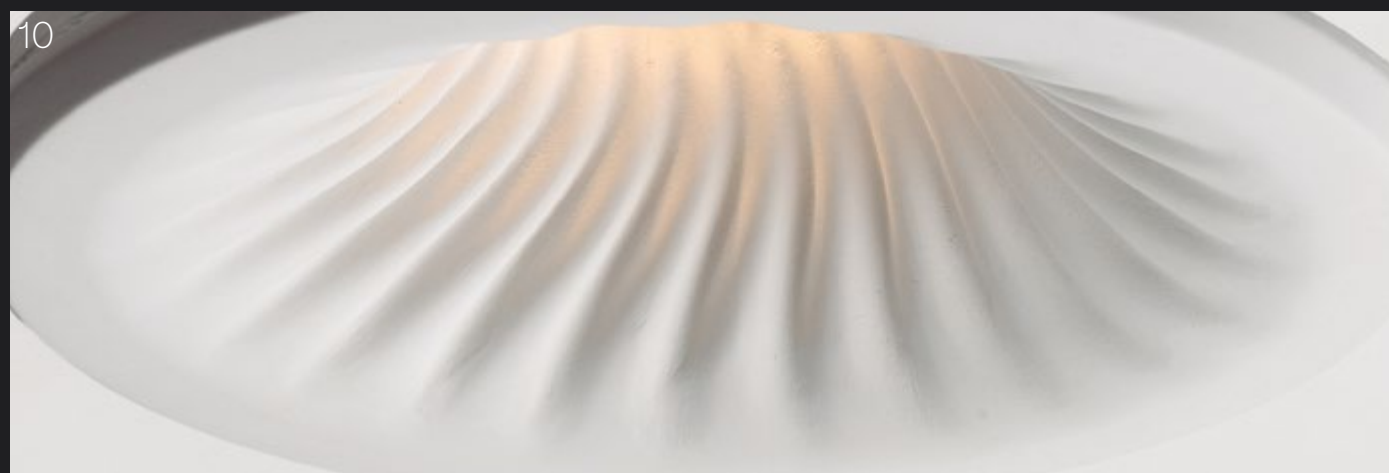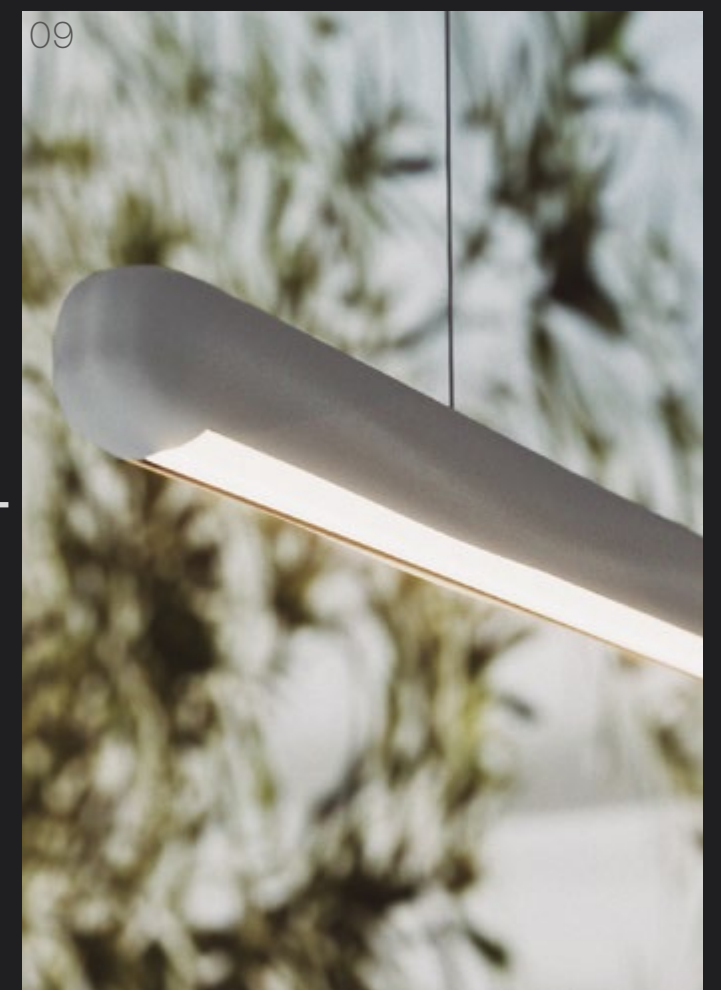

COMMITTED TO LIGHTING THAT RESPECTS THE PLANET

COMPROMETIDOS CON UNA
LUZ QUE RESPETA EL PLANETA

At BPM Lighting, we believe that innovation and sustainability must go hand in hand. Our commitment to the environment and the community is reflected in a people-centered, proximity-based and environmentally responsible management model.

We work daily to reduce the environmental impact of our activities through concrete and measurable actions.

En BPM Lighting creemos que la innovación y la sostenibilidad deben ir de la mano. Nuestro compromiso con el entorno y la comunidad se refleja en un modelo de gestión centrado en las personas, la proximidad y la responsabilidad ambiental.

Trabajamos cada día para reducir el impacto de nuestras actividades, con acciones concretas y medibles.



10%

ANNUAL REDUCTION
OF OUR CARBON FOOTPRINT

*reducción anual de nuestra
huella de carbono*

100%

PLASTIC-FREE PACKAGING
FOR ALL OUR REFERENCES

*Eliminación total de plásticos
en el embalaje*



NEW HEADQUARTERS SOLAR ENERGY

PHOTOVOLTAIC SOLAR PANELS
INSTALLED AT OUR NEW HEADQUARTERS

*Paneles solares fotovoltaicos instalados
en nuestra nueva sede*

FSC

EXCLUSIVE USE FSC-CERTIFIED
CARDBOARD IN ALL PACKAGING

*Uso exclusivo de cartón certificado
FSC en todos nuestros envases*



ECO

PROFILES MADE FROM 100%
RECYCLED MATERIALS

*Introducción de perfiles ECO
con materiales 100% reciclados*



SUSTAINABLE EFFICIENT

AND LOW-IMPACT
PRODUCTION PROCESSES

*Proceso productivo responsable, eficiente y
orientado al bajo impacto ambiental*



100%

MADE IN SPAIN AND IN COLLABORATION
WITH NEARBY SUPPLIERS

*Fabricación 100% en España con
proveedores de proximidad*

CRADLE TO CRADLE®

CERTIFIED LED BOARDS, ENSURING
RECYCLABILITY AND CIRCULARITY

*Incorporación de placas LED con
certificación Cradle to Cradle®*



We understand that lighting is more than just a technical element: it's about well-being, identity, and emotion. That's why we design high-performance, sustainable, and long-lasting solutions that enhance everyday life and respect the planet we share.

Sabemos que la luz es más que un elemento técnico: es bienestar, identidad y emoción. Por eso desarrollamos soluciones de alto rendimiento, sostenibles y duraderas, que acompañan el día a día de las personas y cuidan del entorno que compartimos.

<
 IF YOU CAN
 DREAM IT,
 WE CAN
 MAKE IT!

DAMOS FORMA A TU LUZ.
CREAMOS PROYECTOS ÚNICOS

At BPM Lighting, we believe every space deserves a unique lighting solution. That's why we offer a fully customized design and manufacturing service, turning your ideas into real, tangible luminaires.

From the initial concept to the final installation, our design, engineering and production teams work closely with you to develop exclusive solutions tailored to the needs of each project — including architecture, materials, finishes, optics, and functionality.

En BPM Lighting creemos que cada espacio merece una solución luminosa única. Por eso, ofrecemos un servicio personalizado de diseño y fabricación a medida, capaz de transformar ideas en luminarias reales.

Desde el concepto inicial hasta la instalación final, nuestro equipo de diseño, ingeniería y producción trabaja contigo para desarrollar soluciones exclusivas que se adaptan a las exigencias de cada proyecto: diseño arquitectónico, materiales, acabados, ópticas, y funcionalidad.





WE SHAPE
YOUR LIGHT.
WE CREATE
UNIQUE
PROJECTS



We combine innovation, craftsmanship and technology to create lighting pieces that illuminate with purpose and enhance the user experience. Each custom project reflects our passion for light and our commitment to supporting architects, designers and interior professionals.

We create lighting fixtures that don't exist yet. And we bring them to life with you.

Integramos innovación, artesanía y tecnología para crear piezas que iluminan con intención y elevan la experiencia del espacio. Cada proyecto refleja nuestra pasión por la luz y nuestra capacidad de adaptación a las necesidades de arquitectos, diseñadores e interioristas.

Creamos luminarias que no existen todavía. Y lo hacemos realidad, contigo.

CUSTOMIZATION WITHOUT LIMITS

PERSONALIZACIÓN SIN LÍMITES

At BPM Lighting, we understand that every project is unique. That's why we offer a wide range of custom options in finishes, colors, and formats tailored to the aesthetic and functional needs of each space.

We can create exclusive solutions based on RAL charts, anodized finishes, textures, or special materials, without affecting lead times or compromising product quality.

Because light speaks the language of design. And at BPM, you choose how it speaks.


En BPM Lighting entendemos que cada proyecto es único. Por eso ofrecemos un amplio abanico de opciones personalizadas en acabados, colores y formatos, adaptándonos a la estética y funcionalidad de cada espacio.

Podemos desarrollar soluciones exclusivas en base a cartas RAL, anodizados, texturas y materiales especiales, sin comprometer los plazos de entrega ni la calidad del producto.

Porque la luz también habla el lenguaje del diseño. Y en BPM, ese lenguaje lo eliges tú.




YOUR PROJECT, YOUR PALETTE. NO LIMITS

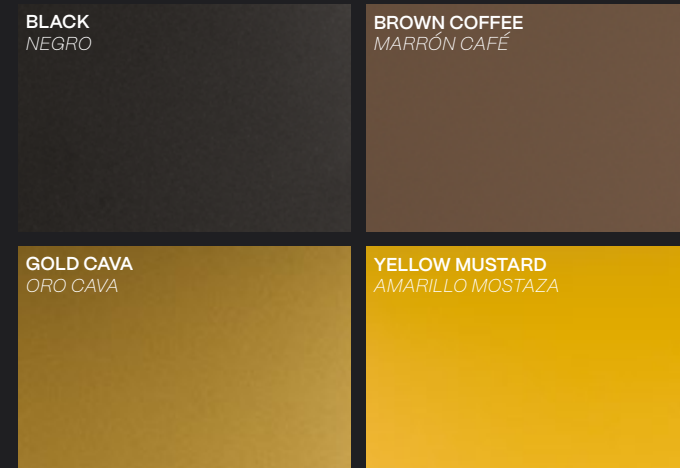

TU PROYECTO,
TUS ACABADOS.
SIN LÍMITES

01 | METALLIC 02 | SATIN 03 | GLOSSY
04 | MATTE 05 | BRUSHED 06 | GRADIENT

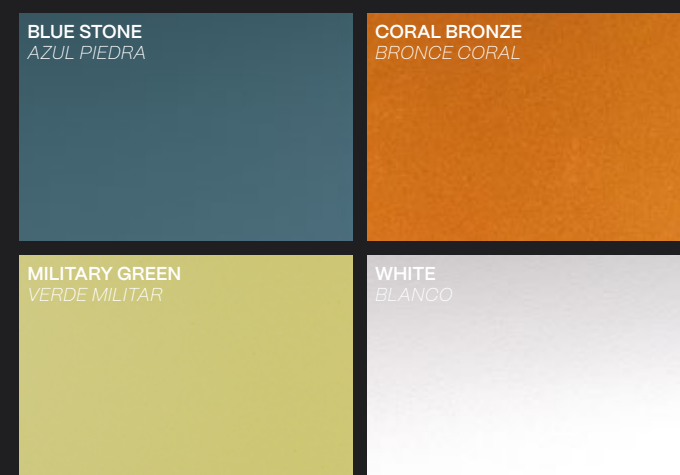

Metallic finishes will always be developed based
on the sample provided by the client.

*Los acabados metálicos se desarrollarán siempre
a partir de la muestra entregada por el cliente*

Color makes a difference.
We create bespoke finishes to adapt each
luminaire to the project, from metallic and satin to
glossy or matte.

*El color marca la diferencia.
Creamos acabados a medida para adaptar cada
luminaria al proyecto, desde metálicos y satinados
hasta brillantes o mate.*

CRISMOSIL®: CRAFTSMANSHIP, DESIGN & LOCAL PRODUCTION

CRISMOSIL®: ARTESANÍA,
DISEÑO Y PRODUCCIÓN LOCAL

At BPM Lighting, we develop and manufacture bespoke luminaires in Spain, combining advanced technology with artisanal processes.

Crismosil® is our exclusive material, reinforced with fiberglass and acrylic resins, handcrafted to ensure durability, precision and seamless architectural integration.

Its flexibility allows full customisation in shapes, colours and finishes, adapting each piece to the creative and technical requirements of architects and designers.

En BPM Lighting desarrollamos y fabricamos luminarias a medida en España, combinando tecnología avanzada con procesos artesanales.

Crismosil® es nuestro material exclusivo, reforzado con fibra de vidrio y resinas acrílicas, elaborado a mano para garantizar durabilidad, precisión e integración arquitectónica.

Su flexibilidad permite una personalización total en formas, colores y acabados, adaptando cada pieza a las necesidades creativas y técnicas de arquitectos y diseñadores.





Una solución lumínica para cualquier espacio

Concebidas como una familia de iluminación arquitectónica, estas luminarias están diseñadas para integrarse con precisión en el entorno construido. Su geometría cuidada y la emisión uniforme de la luz permiten crear espacios confortables y equilibrados, donde la iluminación acompaña la arquitectura de forma natural y controlada.

Con el confort visual como prioridad, la simplicidad del sistema esconde un alto nivel de prestaciones, haciendo posible la creación de ambientes únicos con una iluminación homogénea y un control preciso de la intensidad lumínica.

A lighting solution for any space

Designed as an architectural lighting family, these luminaires are conceived for precise integration into the built environment. Their refined geometry and uniform light emission create comfortable and balanced spaces, allowing light to follow the architecture in a natural and controlled way.

Focused on visual comfort rather than distraction, the simplicity of the system conceals a high level of performance, enabling the creation of unique environments with controlled intensity and homogeneous illumination.

LUMINAIRES

ALBERTA FAMILY

PAG. 46

FLORIDA FAMILY

PAG. 100

ALABAMA FAMILY

PAG. 114

OHIO FAMILY

PAG. 144

ALARIK SLIM LUMINAIRE

PAG. 154

LUMINAIRES



ALBERTA FAMILY



**ALBERTA SOFT | SOFT CONNECT | SOFT STONE
SOFT LOOP | SOFT OUTSIDE**
REF. 140 | 141 | 144 | 142 | 143
PAG. 88 | 48 | 56 | 60 | 72



ALBERTA SLIGHT | SLIGHT CONNECT
REF. 125 | 126
PAG. 92 | 52



ALBERTA INSIDE | INSIDE HAT
REF. 122 | 123
PAG. 80 | 64



ALBERTA SLIGHT ECCENTRIC
REF. 127
PAG. 68



ALBERTA OUTSIDE
REF. 124
PAG. 76




ALBERTA DUE
REF. 121
PAG. 84




ALBERTA
REF. 120
PAG. 96

ALBERTA soft connect


NEW

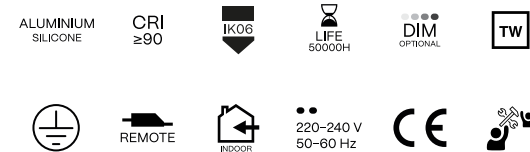


TECHNICAL INFORMATION

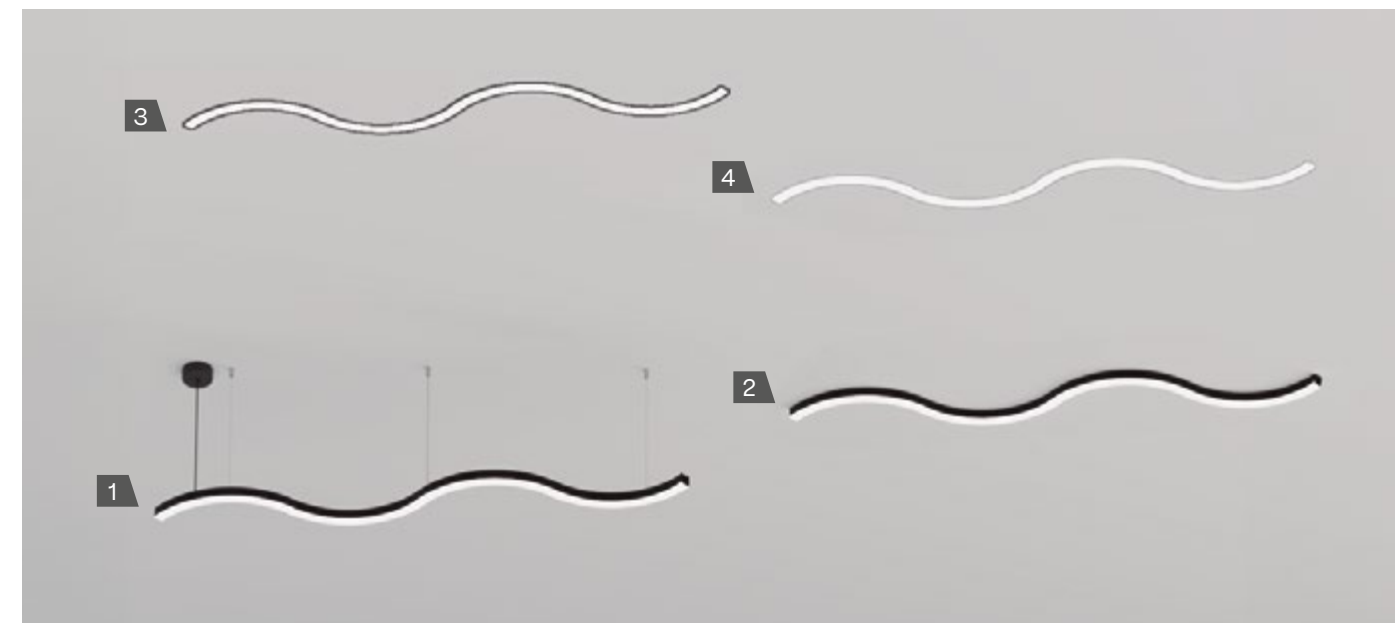


1. PENDANT - PENDANT UP LIGHT

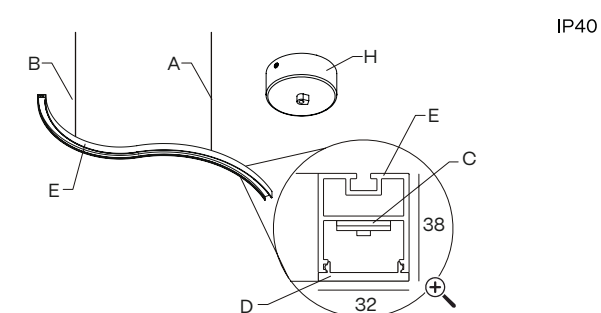


2. SURFACE

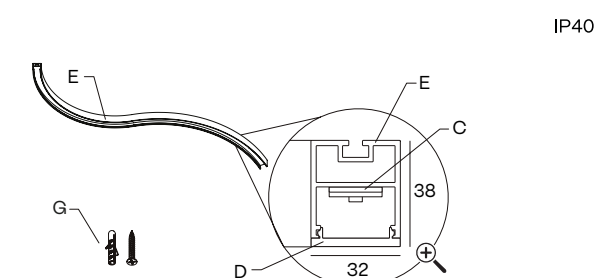

3. RECESSED WITH FRAME

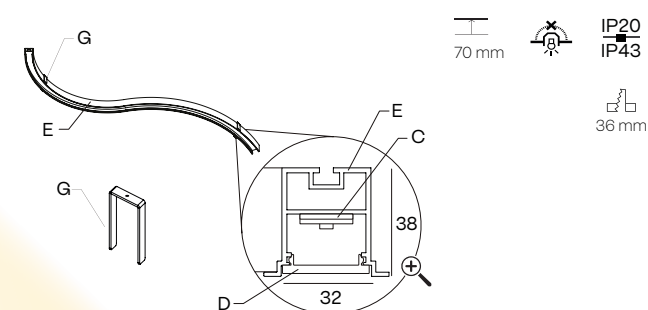

4. TRIMLESS

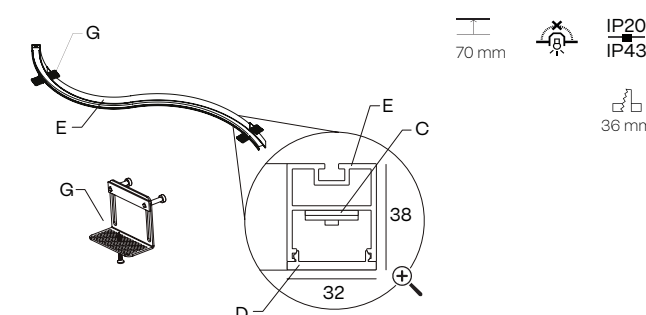

HEIGHT mm.
38

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser

E - Aluminium profile
G - Mounting kit
H - Connection box not included

□ Cut hole
— Minimum height of the false ceiling
⊗ Luminaire not suitable to be covered with thermal insulating material

CUSTOM


PENDANT COMPONENTS

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		600 mm	SC20.60			
		800 mm	SC20.80			
		1000 mm	SC20.100			
				SC05.SA	SC07.SA	SC10.SA

GENERAL COMPONENTS

COVER KIT	LINEAR JOINT
A141C	A141JBXXXX

BUILD YOUR PERFECT LUMINAIRE (EXAMPLE)

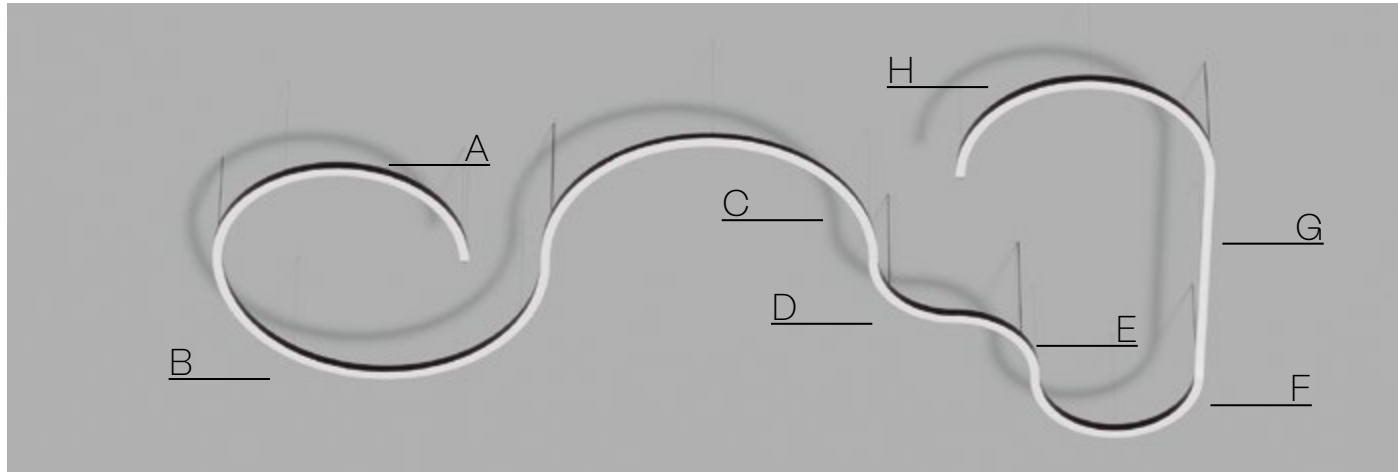

SECTION	A	B	C	D	E	F	G	H
SEGMENT	4	7	7	3	3	2	10	4

Silicone



FINISH

- B** · Black
- W** · White
- S** · Special color

ON DEMAND OPTIONS



Special finishes



Number switches



Tunable white



RGB



Emergency lighting



Motion detection



Wireless control options



Surface/Wall sfc. up light

TECHNICAL INFORMATION

POWER HIGH

		Ø450 90°	Ø450 180°	Ø650 90°	Ø650 180°	Ø950 180°	Ø1250 90°	Ø1250 180°
24 V	4 W	279 – 310 – 341 lm	559 – 621 – 683 lm	403 – 448 – 493 lm	807 – 896 – 986 lm	1179 – 1310 – 1441 lm	776 – 862 – 948 lm	1552 – 1724 – 1896 lm
	700 mA	19 W	38 W	19 W	44 W	66 W	44 W	88 W
		1771 – 1780 – 1937 lm	3543 – 3561 – 3873 lm	2196 – 2260 – 2422 lm	4393 – 4520 – 4844 lm	6649 – 6760 – 7352 lm	4454 – 4530 – 4534 lm	8908 – 9059 – 9068 lm
Silicone	2700 K	141ED	141EF	141EG	141EI	141EM	141EO	141EQ
	3000 K	141ED	141EF	141EG	141EI	141EM	141EO	141EQ
	4000 K	141ED	141EF	141EG	141EI	141EM	141EO	141EQ

		.03	.04	.05	.06	.07	.08
24 V	9 W	593 – 659 – 724 lm	790 – 878 – 966 lm	988 – 1098 – 1207 lm	1185 – 1317 – 1449 lm	1383 – 1537 – 1690 lm	1580 – 1756 – 1932 lm
	700 mA	42 W	56 W	70 W	84 W	98 W	112 W
		3668 – 3987 – 4306 lm	4891 – 5316 – 5741 lm	6113 – 6645 – 7177 lm	7336 – 7974 – 8612 lm	8559 – 9303 – 10047 lm	9781 – 10632 – 11483 lm
Silicone	2700 K	141EH	141EJ	141EL	141EN	141EP	141ER
	3000 K	141EH	141EJ	141EL	141EN	141EP	141ER
	4000 K	141EH	141EJ	141EL	141EN	141EP	141ER

Dimensions without end caps.

Total length = Electrical system length + 2 x 4 mm (Ends) + Cover Kit mm. When closing the luminaire, add 22 mm (11 mm per end cap).

SEGMENT 1	SEGMENT 2	SEGMENT 3	SEGMENT 4	SEGMENT 5	SEGMENT 6	SEGMENT 7
Ø450 90°	Ø450 180°	Ø650 90°	Ø650 180°	Ø950 180°	Ø1250 90°	Ø1250 180°
141ED1B312O	141EF1B312O	141EG1B312O	141EH1B312O	141EM1B312O	141EO1B312O	141EQ1B312O
SEGMENT 8	SEGMENT 9	SEGMENT 10	SEGMENT 11	SEGMENT 12	SEGMENT 13	
843 mm	1124 mm	1405 mm	1686 mm	1967 mm	2248 mm	
141EH1B312O	141EJ1B312O	141EL1B312O	141EN1B312O	141EP1B312O	141ER1B312O	

The data shown corresponds to raw values.

INSTALLATION

- 1** · Pendant
- 2** · Pendant up light
- 3** · Surface
- 5** · Recessed with frame
- 6** · Trimless

FINISH

- B** · Black
- W** · White
- S** · Special color

DIMM OPTIONS


- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

Up light


Down light

ALBERTA SLIGHT CONNECT


NEW

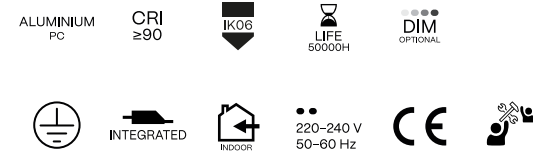


INSTALLATION

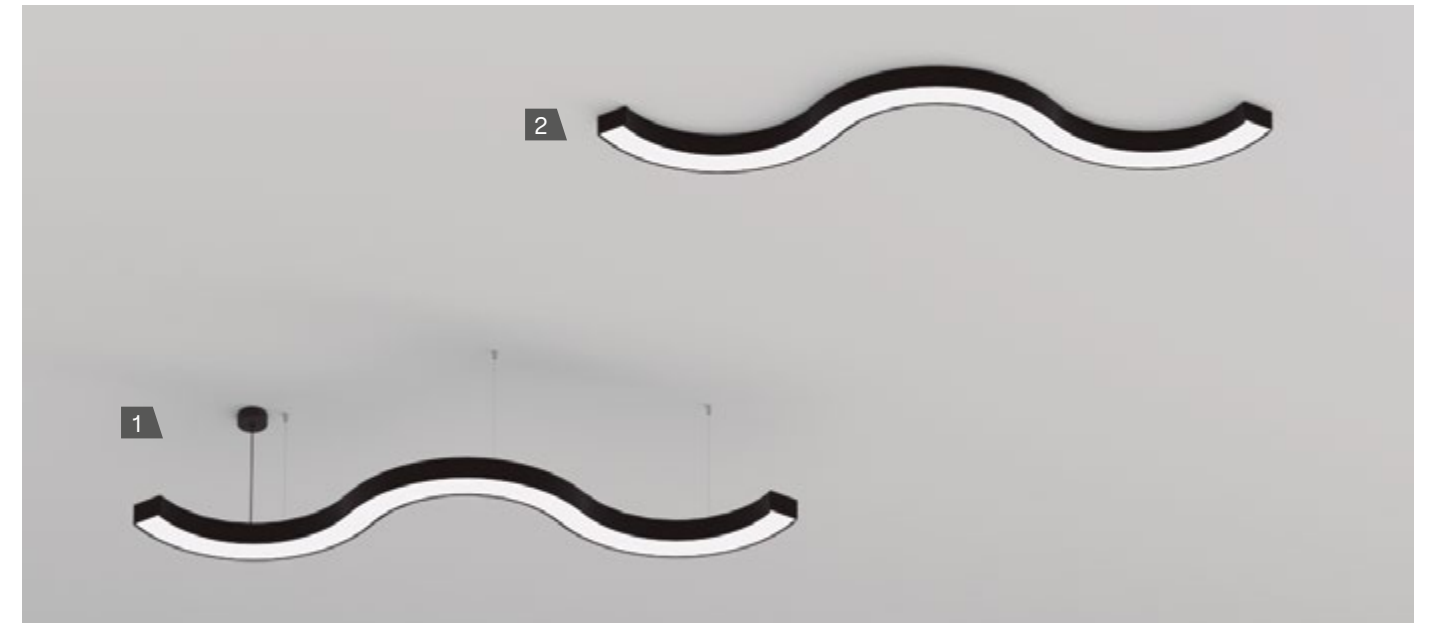

1. PENDANT - PENDANT UP LIGHT

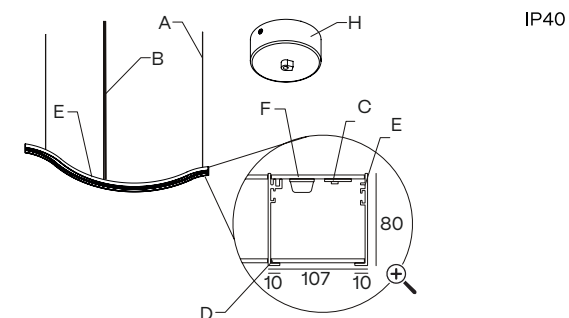

2. SURFACE

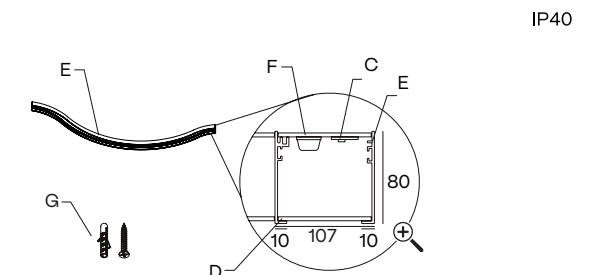

Diffuser width may vary by a few millimeters depending on the product diameter. Please refer to the data provided for each model.





HEIGHT mm.
80

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser



E - Aluminium profile
F - Aluminium cover
G - Mounting kit
H - Included connection box

CUSTOM


PENDANT COMPONENTS

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		600 mm	SC20.60 			
		800 mm	SC20.80 			
		1000 mm	SC20.100 			
				SC05.SA	SC07.SA	SC10.SA


GENERAL COMPONENTS

COVER KIT	LINEAR JOINT
	
A126C 	A126JBXXXX

BUILD YOUR PERFECT LUMINAIRE (EXAMPLE)

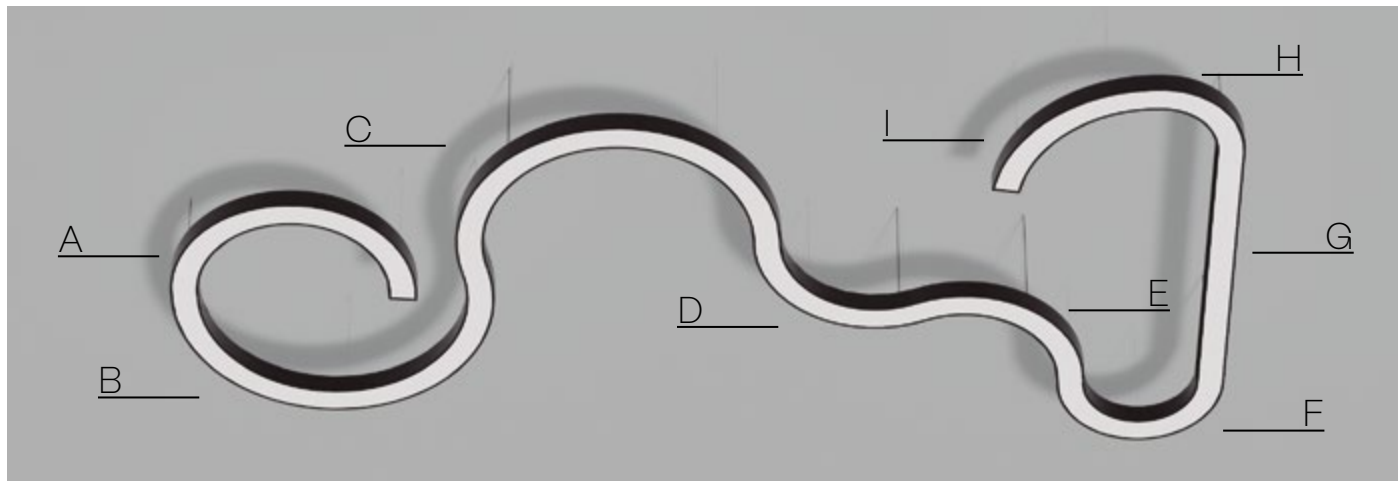

SECTION	A	B	C	D	E	F	G	H	I
SEGMENT	4	6	6	3	3	2	9	1	3

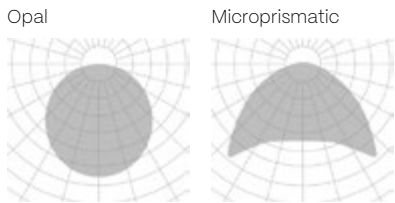

-  **FINISH**

 - B** · Black
 - W** · White
 - S** · Special color
-  **ON DEMAND OPTIONS**

 Special finishes

 Special color temperatures

 Number switches

 Custom dimensions

 Emergency lighting







 Motion detection





 Wireless control options

 Surface/Wall sfc. up light



TECHNICAL INFORMATION

POWER STANDARD

							
		Ø650 90°	Ø650 180°	Ø950 90°	Ø950 180°	Ø1250 90°	Ø1250 180°
 24 V		6 W 403 – 448 – 493 lm	12 W 807 – 896 – 986 lm	9 W 590 – 655 – 721 lm	17 W 1179 – 1310 – 1441 lm	11 W 776 – 862 – 948 lm	22 W 1552 – 1724 – 1896 lm
	 700 mA	15 W 1481 – 1556 – 1633 lm	29 W 2963 – 3111 – 3267 lm	29 W 2469 – 2593 – 2722 lm	49 W 4938 – 5185 – 5444 lm	29 W 2963 – 3111 – 3267 lm	29 W 6420 – 6741 – 7078 lm
	Opal - Microprismatic	2700 K 126EG  1  2 	126EI  1  2 	126EK  1  2 	126EM  1  2 	126EO  1  2 	126EQ  1  2 
		3000 K 126EG  1  3 	126EI  1  3 	126EK  1  3 	126EM  1  3 	126EO  1  3 	126EQ  1  3 
		4000 K 126EG  1  5 	126EI  1  5 	126EK  1  5 	126EM  1  5 	126EO  1  5 	126EQ  1  5 

							
		.03	.04	.05	.06	.07	.08
 24 V		10 W 666 – 740 – 814 lm	13 W 888 – 987 – 1086 lm	16 W 1110 – 1234 – 1357 lm	19 W 1332 – 1480 – 1628 lm	22 W 1551 – 1724 – 1896 lm	26 W 1776 – 1924 – 2171 lm
	 700 mA	29 W 2963 – 3111 – 3267 lm	39 W 3950 – 4148 – 4355 lm	49 W 4938 – 5185 – 5444 lm	59 W 5926 – 6222 – 6533 lm	69 W 6913 – 7259 – 7622 lm	78 W 7901 – 8296 – 8711 lm
	Opal - Microprismatic	2700 K 126EH  1  2 	126EJ  1  2 	126EL  1  2 	126EN  1  2 	126EP  1  2 	126ER  1  2 
		3000 K 126EH  1  3 	126EJ  1  3 	126EL  1  3 	126EN  1  3 	126EP  1  3 	126ER  1  3 
		4000 K 126EH  1  5 	126EJ  1  5 	126EL  1  5 	126EN  1  5 	126EP  1  5 	126ER  1  5 

Dimensions without end caps.
Total length = Electrical system length + 2 x 4 mm (Ends) + Cover Kit mm. When closing the luminaire, add 22 mm (11 mm per end cap).

SEGMENT 1	SEGMENT 2	SEGMENT 3	SEGMENT 4	SEGMENT 5	SEGMENT 6
					
Ø650 90° 126EG1B1120	Ø650 180° 126EI1B1120	Ø950 90° 126EK1B1120	Ø950 180° 126EM1B1120	Ø1250 90° 126EO1B1120	Ø1250 180° 126EQ1B1120
SEGMENT 7	SEGMENT 8	SEGMENT 9	SEGMENT 10	SEGMENT 11	SEGMENT 12
					
843 mm 126EH1B1120	1124 mm 126EJ1B1120	1405 mm 126EL1B1120	1686 mm 126EN1B1120	1967 mm 126EP1B1120	2248 mm 126ER1B1120

The data shown corresponds to raw values.

-  **INSTALLATION**

 - 1** · Pendant
 - 2** · Pendant up light
 - 3** · Surface
-  **FINISH**

 - B** · Black
 - W** · White
 - S** · Special color
-  **DIFFUSER**


 - 1** · Opal
 - 2** · Microprismatic
-  **DIMM OPTIONS**

 - O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v
-  Up light


 Down light

ALBERTA SOFT STONE


NEW

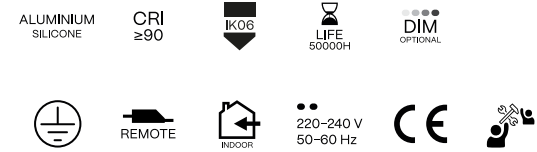


INSTALLATION

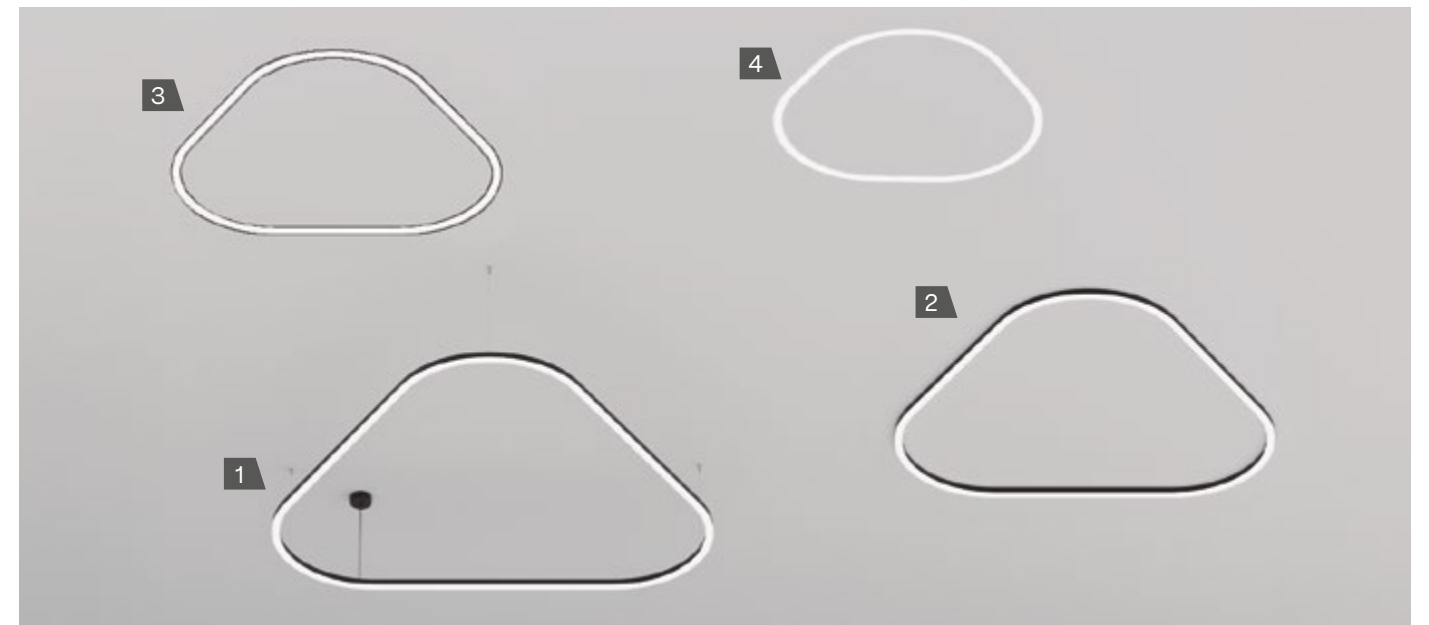


1. PENDANT - PENDANT UP LIGHT

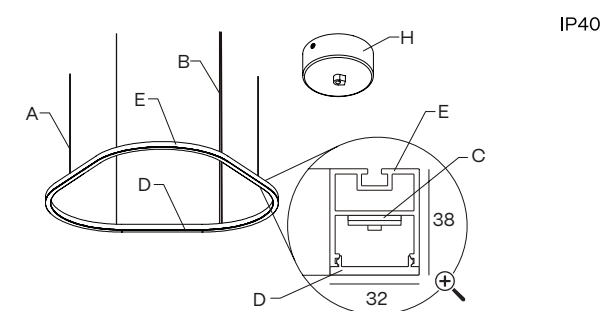


2. SURFACE

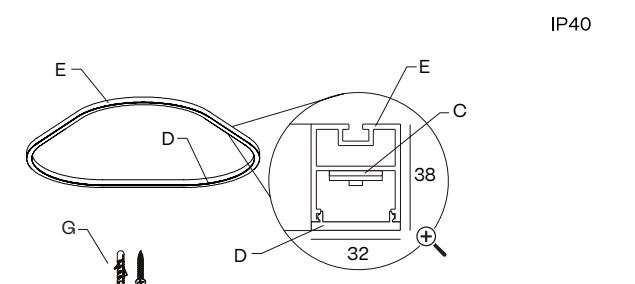

3. RECESSED WITH FRAME

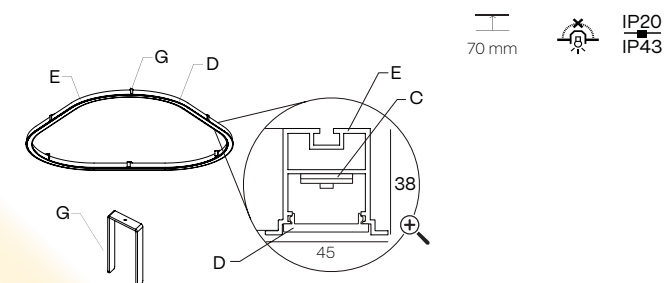

4. TRIMLESS

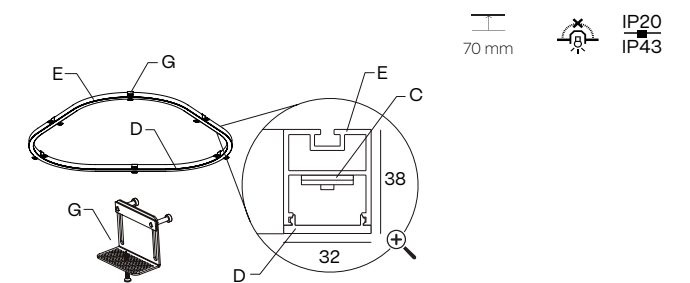

WIDTH x LENGTH mm.
1167 x 1201 · 1385 x 1452 · 1602 x 1703
1818 x 1952

HEIGHT mm.
38

A - 3x aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser

E - Aluminium profile
G - Mounting kit
H - Connection box not included

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.35	CB10		 Ø85 CB10	.35	SC21
	 26 Ø150	.45 .65	CB02		 Ø125 CB02	.45 .65	SC22
	 47 Ø310	.95 .125 .150	CB05		 Ø215 CB05	.95 .125 .150	SC23
SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m					
SC05.SA	SC07.SA	SC10.SA					

FINISH

B · Black

W · White

S · Special color

ON DEMAND OPTIONS

Special finishes

Number switches

Emergency lighting

Tunable white

Wireless control options

RGB

Surface/Wall sfc. up light

TECHNICAL INFORMATION

POWER HIGH

		1167 x 1201	1385 x 1452	1602 x 1703	1818 x 1952
	24 V	42 W 2924 – 3249 – 3573 lm	51 W 3516 – 3907 – 4298 lm	59 W 4109 – 4566 – 5022 lm	68 W 4702 – 5224 – 5747 lm
	700 mA	174 W 16966 – 17506 – 19009 lm	216 W 20634 – 21494 – 23315 lm	258 W 24302 – 25480 – 27621 lm	300 W 27970 – 29467 – 31927 lm
	2700 K	144EB 312	144EE 312	144EH 312	144EJ 312
	3000 K	144EB 313	144EE 313	144EH 313	144EJ 313
	4000 K	144EB 315	144EE 315	144EH 315	144EJ 315



The data shown corresponds to raw values.

INSTALLATION

1 · Pendant

2 · Pendant up light

3 · Surface

5 · Recessed with frame

6 · Trimless

FINISH

B · Black

W · White

S · Special color

DIMM OPTIONS

O · On-Off

D · Dali

P · Push


V · 1.10v

Up light

Down light

ALBERTA SOFT LOOP


NEW

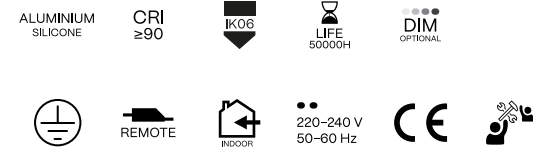


INSTALLATION




1. PENDANT

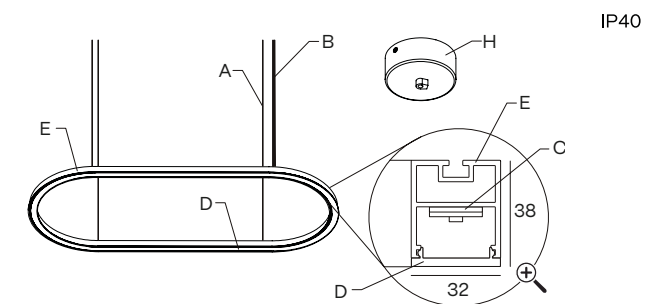


2. SURFACE

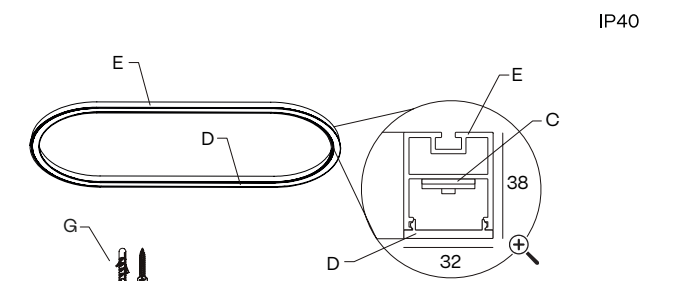

3. RECESSED WITH FRAME

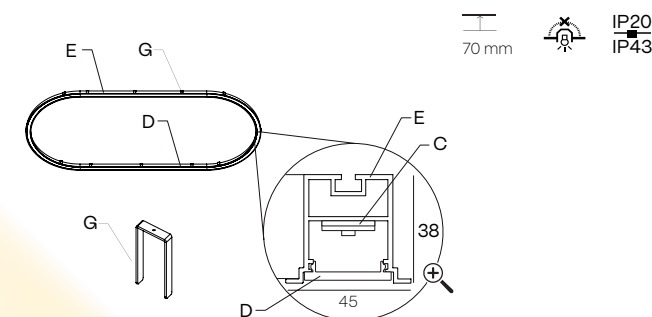

4. TRIMLESS

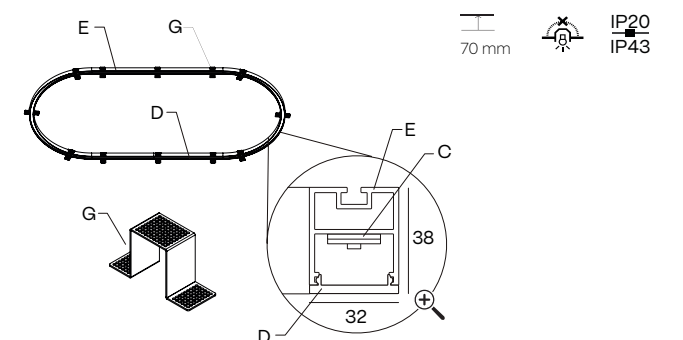

WIDTH x LENGTH mm.
650 x 1402 · 950 x 1955

HEIGHT mm.
38

A – 3x aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser




E – Aluminium profile
G – Mounting kit
H – Connection box not included

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material



COMPONENTS

PENDANT

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		600 mm	SC20.60 			
		800 mm	SC20.80 			
		1000 mm	SC20.100 			
				SC05.SA	SC07.SA	SC10.SA

TECHNICAL INFORMATION

POWER HIGH

			
		650 x 1402 mm	950 x 1955 mm
	700 mA	216 W 20514 - 21535 - 23143 lm	244 W 23079 - 24151 - 26186 lm
	2700 K	142EF   312 	142EI   312 
	3000 K	142EF   313 	142EI   313 
	4000 K	142EF   315 	142EI   315 

-  **FINISH**
- B · Black
 - W · White
 - S · Special color

 ON DEMAND OPTIONS



Special finishes



Number switches



Tunable white



RGB



Motion detection



Wireless control options



Surface/Wall sfc. up light

 INSTALLATION

- 1 · Pendant
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless

 FINISH

- B · Black
- W · White
- S · Special color


 DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

 Up light

 Down light


Silicone



The data shown corresponds to raw values.

ALBERTA INSIDE HAT


NEW

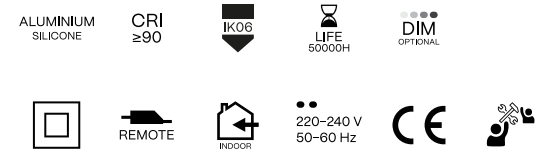

INSTALLATION



1. PENDANT

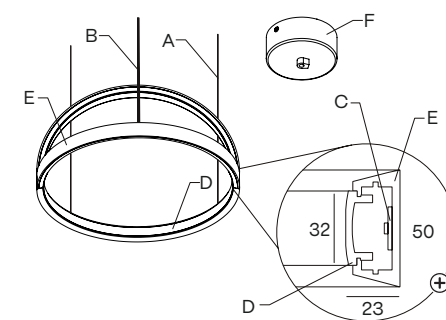

DIAMETERS mm.

650 · 950

HEIGHT mm.

50

A - 3x aircraft cable (3 m)

B - Power cable

C - LED stripe

D - Diffuser



E - Aluminium profile

F - Connection box not included



COMPONENTS

PENDANT



SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		
SC05.SA	SC07.SA	SC10.SA

- FINISH**
- B · Black
 - W · White
 - S · Special color


- ON DEMAND OPTIONS**
-  Special finishes
-  Custom dimensions
-  Tunable white
-  RGB

TECHNICAL INFORMATION

POWER STANDARD

			
		Ø650	Ø950
	24 V	88 W 6888 – 7439 – 8167 lm	129 W 10066 – 10873 – 11936 lm
	2700 K	123EF1  112 	123E11  112 
	3000 K	123EF1  113 	123E11  113 
	4000 K	123EF1  115 	123E11  115 

Silicone



The data shown corresponds to raw values.

- FINISH**
- B · Black
 - W · White
 - S · Special color

- DIMM OPTIONS**
- O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v

 Inside light

ALBERTA SLIGHT ECCENTRIC

ALUMINIUM
PC

CRI
≥90

IK06

LIFE
50000H


DIM
OPTIONAL



INSTALLATION




1. PENDANT – PENDANT UP LIGHT

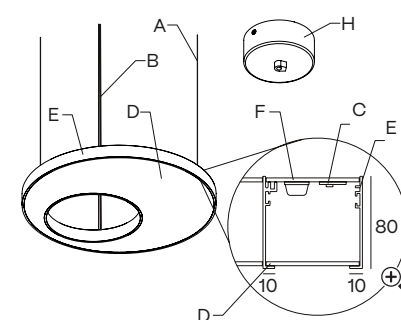

IP40

2. SURFACE

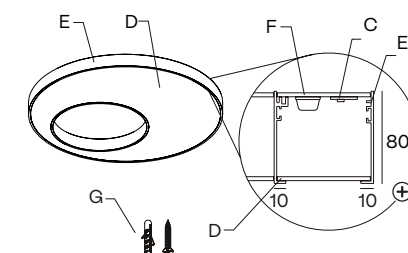

IP40

DIAMETERS mm.

650 · 950 · 1250

HEIGHT mm.

80

A – 3× aircraft cable (3 m)

B – Power cable

C – LED module

D – Diffuser

E – Aluminium profile



F – Aluminium cover



G – Mounting kit




H – Included connection box

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
		.65	CB02 
		.95 .125	CB05 

CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
		.65	SC22 
		.95 .125	SC23 

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		
SC05.SA	SC07.SA	SC10.SA

 **FINISH**
B · Black
W · White
S · Special color

 **ON DEMAND OPTIONS**

 Special finishes

 Special color temperatures

 Number switches

 Emergency lighting

 Motion detection


 Wireless control options

 Surface/Wall sfc. up light

TECHNICAL INFORMATION

POWER STANDARD

		 Int. Ø235 – Ext. Ø650	 Int. Ø430 – Ext. Ø950	 Int. Ø730 – Ext. Ø1250
	24 V	25 W 1816 – 1900 – 2040 lm	37 W 2724 – 2850 – 3060 lm	48 W 3556 – 3721 – 3995 lm
	 700 mA	49 W 4938 – 5185 – 5444 lm	49 W 7901 – 8296 – 8711 lm	49 W 11851 – 12444 – 13066 lm
Opal	2700 K	127EF   112 	127EI   112 	127EK   112 
	3000 K	127EF   113 	127EI   113 	127EK   113 
	4000 K	127EF   115 	127EI   115 	127EK   115 
Microprismatic	2700 K	127EF   122 	127EI   122 	127EK   122 
	3000 K	127EF   123 	127EI   123 	127EK   123 
	4000 K	127EF   125 	127EI   125 	127EK   125 

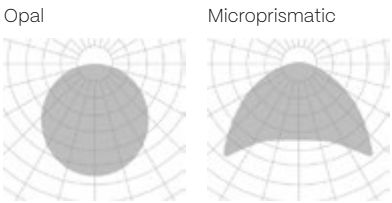

The data shown corresponds to raw values.

 **INSTALLATION**
1 · Pendant
2 · Pendant up light
3 · Surface


 **FINISH**
B · Black
W · White
S · Special color

 **DIMM OPTIONS**
O · On-Off
D · Dali
P · Push
V · 1.10v


 Up light
 Down light

ALBERTA soft OUTSIDE


NEW

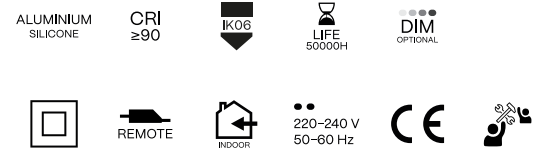


INSTALLATION

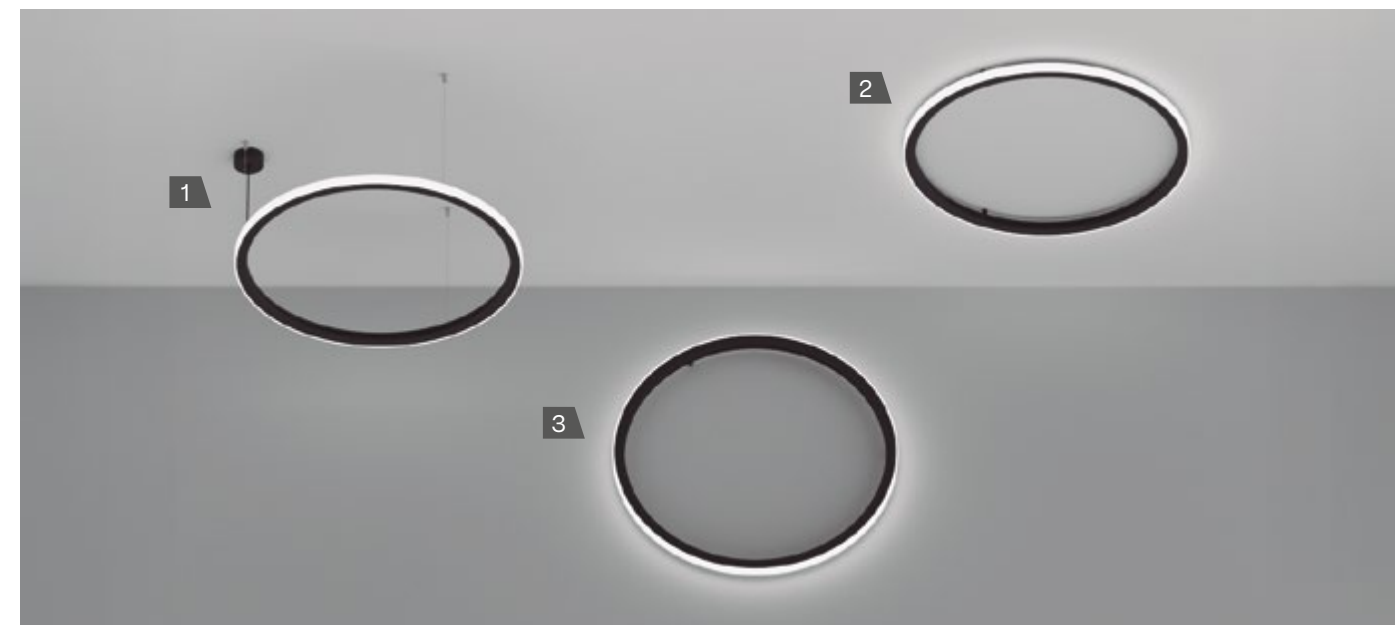


1. PENDANT

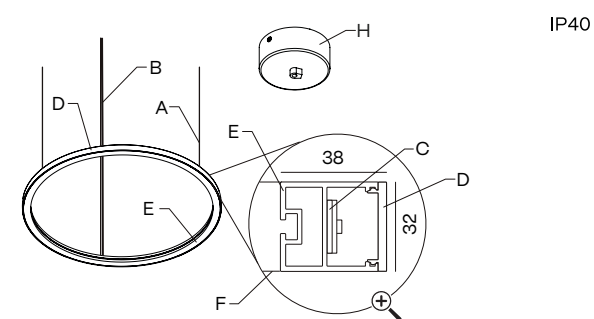

2. SURFACE

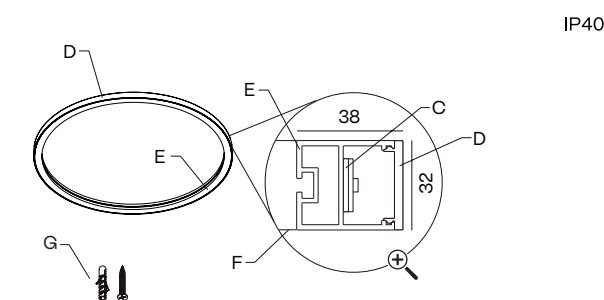

3. WALL SURFACE

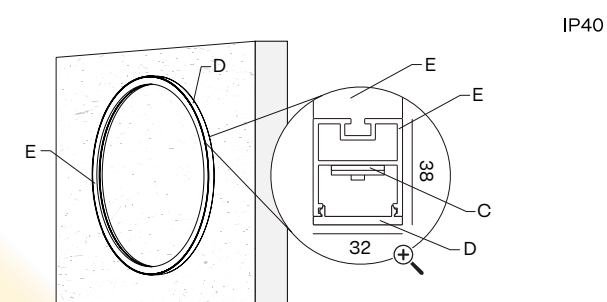

DIAMETERS mm.

950 · 1250

HEIGHT mm.

32

A - 3x aircraft cable (3 m)

B - Power cable

C - LED stripe

D - Diffuser





E - Aluminium profile

G - Mounting kit

H - Connection box not included

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
		.95 .125	CB05			.95 .125	SC23
SUSPENSION KIT 5m				SUSPENSION KIT 7m			
							
SC05.SA				SC07.SA			
SUSPENSION KIT 10m							
SC10.SA							

FINISH

B · Black

W · White

S · Special color

ON DEMAND OPTIONS

Special finishes

Emergency lighting

Number switches

Motion detection

TW Tunable white

Wireless control options

RGB


Surface/Wall sfc. up light

TECHNICAL INFORMATION

POWER HIGH

			
		Int. Ø886 - Ext. Ø950	Int. Ø1186 - Ext. Ø1250
	700 mA	86 W 6711 - 7248 - 7957 lm	113 W 8830 - 9537 - 10470 lm
	2700 K	143EI   112 	143EK   112 
	3000 K	143EI   113 	143EK   113 
	4000 K	143EI   115 	143EK   115 

Silicone



The data shown corresponds to raw values.

INSTALLATION

1 · Pendant

3 · Surface

7 · Wall Surface

FINISH

B · Black

W · White

S · Special color

DIMM OPTIONS

O · On-Off

D · Dali

P · Push

V · 1.10v

Outside light



74

ALBERTA FAMILY

ALBERTA SOFT OUTSIDE

75

ALBERTA OUTSIDE

NEW

ALUMINIUM
SILICONE

CRI
≥90

IK06

LIFE
50000H

DIM
OPTIONAL



REMOTE


INDOOR

220-240 V
50-60 Hz


CE



INSTALLATION

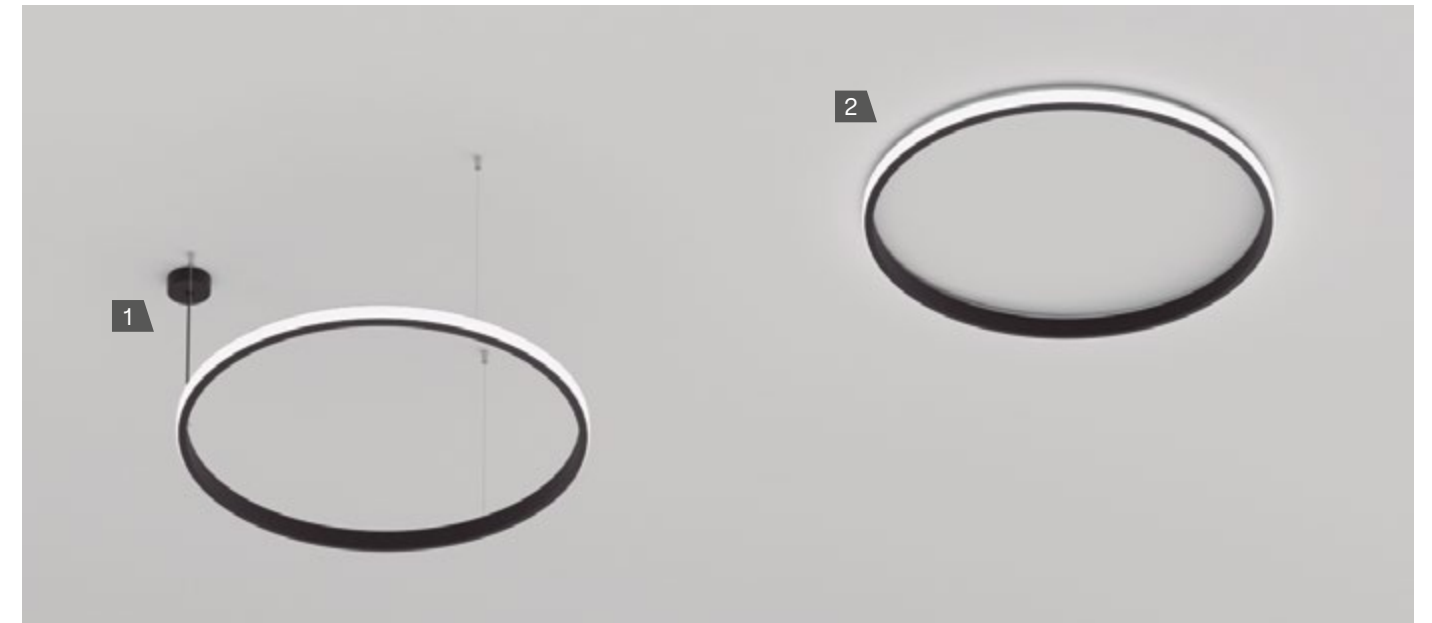


1. PENDANT

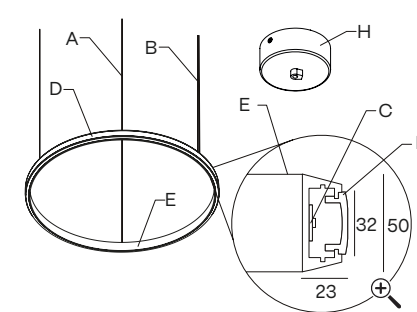

IP40

2. SURFACE

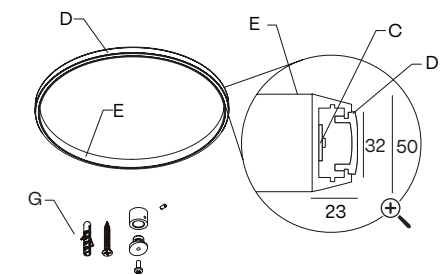

IP40

DIAMETERS mm.

450 · 650 · 950 · 1250

HEIGHT mm.

50

A - 3x aircraft cable (3 m)

B - Power cable

C - LED stripe

D - Diffuser

E - Aluminium profile


G - Mounting kit

H - Connection box not included





COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	 26 Ø150	.45 .65	CB02 
	 47 Ø310	.95 .125	CB05 

CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 +  Ø125 CB02	.45 .65	SC22 
	 +  Ø215 CB05	.95 .125	SC23 


SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA

-  **FINISH**
- B** · Black
 - W** · White
 - S** · Special color


-  **ON DEMAND OPTIONS**
-  Special finishes
 -  Custom dimensions
 -  **TW** Tunable white
 -  RGB

TECHNICAL INFORMATION

POWER STANDARD

		 Int. Ø404 – Ext. Ø450	 Int. Ø604 – Ext. Ø650	 Int. Ø904 – Ext. Ø950	 Int. Ø1204 – Ext. Ø1250
	24 VdC	41 W 3179 – 3433 – 3769 lm	59 W 4592 – 4959 – 5445 lm	86 W 6711 – 7248 – 7957 lm	113 W 8830 – 9537 – 10470 lm
Silicone	2700 K	124ED   112 	124EF   112 	124EI   112 	124EK   112 
	3000 K	124ED   113 	124EF   113 	124EI   113 	124EK   113 
	4000 K	124ED   115 	124EF   115 	124EI   115 	124EK   115 

Silicone



The data shown corresponds to raw values.


-  **INSTALLATION**
- 1** · Pendant
 - 3** · Surface

-  **FINISH**
- B** · Black
 - W** · White
 - S** · Special color

-  **DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

 Inside light


ALBERTA INSIDE

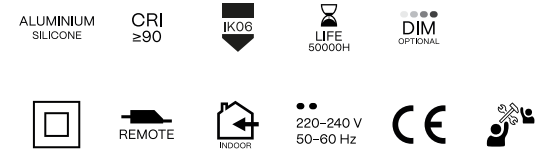

INSTALLATION




1. PENDANT

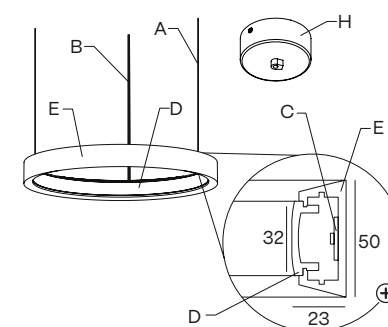

IP40

2. SURFACE

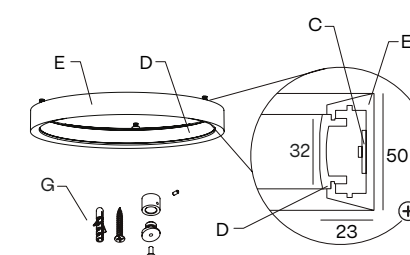

IP40

DIAMETERS mm.
250 · 350 · 450 · 650 · 950 · 1250


HEIGHT mm.
50



A – 3x aircraft cable (3 m)
B – Power cable
C – LED stripe
D – Diffuser



E – Aluminium profile
G – Mounting kit
H – Connection box not included

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.25 .35	CB10 
	 26 Ø150	.45 .65	CB02 
	 47 Ø310	.95 .125	CB05 


CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø85 CB10	.25 .35	SC21 
	 Ø125 CB02	.45 .65	SC22 
	 Ø215 CB05	.95 .125	SC23 


SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA

VERTICAL ACCESSORY

ALBERTA INSIDE VERTICAL PENDANT SYSTEM	CONNECTION BOX	DIMENSION	REFERENCE
	 3m	.35	A122HB1XXX
		.45	A122HE1XXX
		.65	A122HH1XXX
		.95	A122HJ1XXX
		.125	A122HL1XXX

VTILT ACCESSORY

ALBERTA INSIDE VTILT ROD	CONNECTION BOX	DIMENSION	REFERENCE
		.35	A122HB2XXX 
		.45	A122HE2XXX 

EXTRA ALBERTA INSIDE VTILT ROD	DIMENSION	REFERENCE
	800 mm	SC20.80 
	1000 mm	SC20.100 

FINISH

B · Black

W · White

S · Special color

ON DEMAND OPTIONS

Special finishes

Custom dimensions

TW Tunable white

RGB

TECHNICAL INFORMATION

POWER STANDARD

		 Int. Ø204 – Ext. Ø250	 Int. Ø304 – Ext. Ø350	 Int. Ø404 – Ext. Ø450	 Int. Ø604 – Ext. Ø650	 Int. Ø904 – Ext. Ø950	 Int. Ø1204 – Ext. Ø1250
 Silicone	24 VdC	24 W 1766 – 1907 – 2094 lm	32 W 3407 – 2670 – 2932 lm	41 W 3179 – 3433 – 3769 lm	59 W 4592 – 4959 – 5445 lm	86 W 6711 – 7248 – 7957 lm	113 W 8830 – 9537 – 10470 lm
	2700 K	122EB   112 	122EC   112 	122ED   112 	122EF   112 	122EI   112 	122EK   112 
	3000 K	122EB   113 	122EC   113 	122ED   113 	122EF   113 	122EI   113 	122EK   113 
	4000 K	122EB   115 	122EC   115 	122ED   115 	122EF   115 	122EI   115 	122EK   115 



The data shown corresponds to raw values.

INSTALLATION

1 · Pendant

3 · Surface

FINISH

B · Black

W · White

S · Special color

DIMM OPTIONS

O · On-Off

D · Dali

P · Push

V · 1.10v

Inside light


82

ALBERTA FAMILY

ALBERTA INSIDE

83


ALBERTA DUE

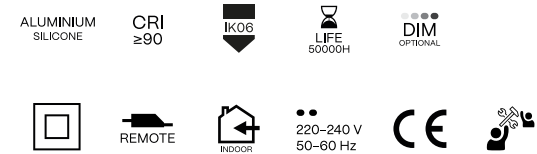

INSTALLATION




1. PENDANT

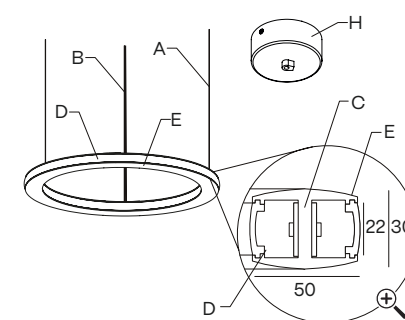

IP40

2. SURFACE

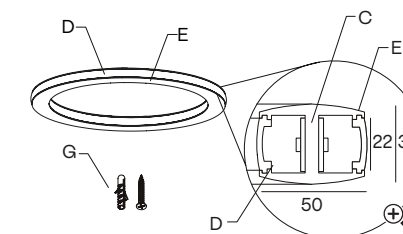

IP40

DIAMETERS mm.
260 · 360 · 460 · 660 · 960 · 1260

HEIGHT mm.
30

A – 3× aircraft cable (3 m)
B – Power cable
C – LED stripe
D – Diffuser

E – Aluminium profile
G – Mounting kit
H – Connection box not included

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.25 .35	CB10		 Ø85 CB10	.25 .35	SC21
	 26 Ø150	.45 .65	CB02		 Ø125 CB02	.45 .65	SC22
	 47 Ø310	.95 .125	CB05		 Ø215 CB05	.95 .125	SC23
SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m					
SC05.SA	SC07.SA	SC10.SA					

MOVE ACCESSORY

ALBERTA DUE MOVE TILT ROD	CONNECTION BOX	DIMENSIONS	REFERENCE
		.35	A121HB1XXX
		.45	A121HE1XXX

- FINISH**
- B** · Black
 - W** · White
 - S** · Special color


- ON DEMAND OPTIONS**
- Special finishes
- Number switches
- Tunable white
- RGB

TECHNICAL INFORMATION

POWER STANDARD

		Int. Ø160 - Ext. Ø260	Int. Ø260 - Ext. Ø360	Int. Ø360 - Ext. Ø460	Int. Ø560 - Ext. Ø660	Int. Ø860 - Ext. Ø960	Int. Ø1160 - Ext. Ø1260
	24 VdC	23 W 1698 - 2026 - 2419 lm	32 W 2377 - 2837 - 3387 lm	41 W 3056 - 3647 - 4354 lm	59 W 4415 - 5268 - 6289 lm	86 W 6453 - 7700 - 9192 lm	113 W 8490 - 10132 - 12095 lm
	2700 K	121EB 112	121EC 112	121ED 112	121EF 112	121EI 112	121EK 112
	3000 K	121EB 113	121EC 113	121ED 113	121EF 113	121EI 113	121EK 113
	4000 K	121EB 115	121EC 115	121ED 115	121EF 115	121EI 115	121EK 115

Silicone



The data shown corresponds to raw values.

- INSTALLATION**
- 1** · Pendant
 - 3** · Surface

- FINISH**
- B** · Black
 - W** · White
 - S** · Special color

- DIMM OPTIONS**
- O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v


Outside/inside light

ALBERTA SOFT


ALUMINIUM SILICONE CRI ≥90 IK06 LIFE 50000H DIM OPTIONAL




INSTALLATION

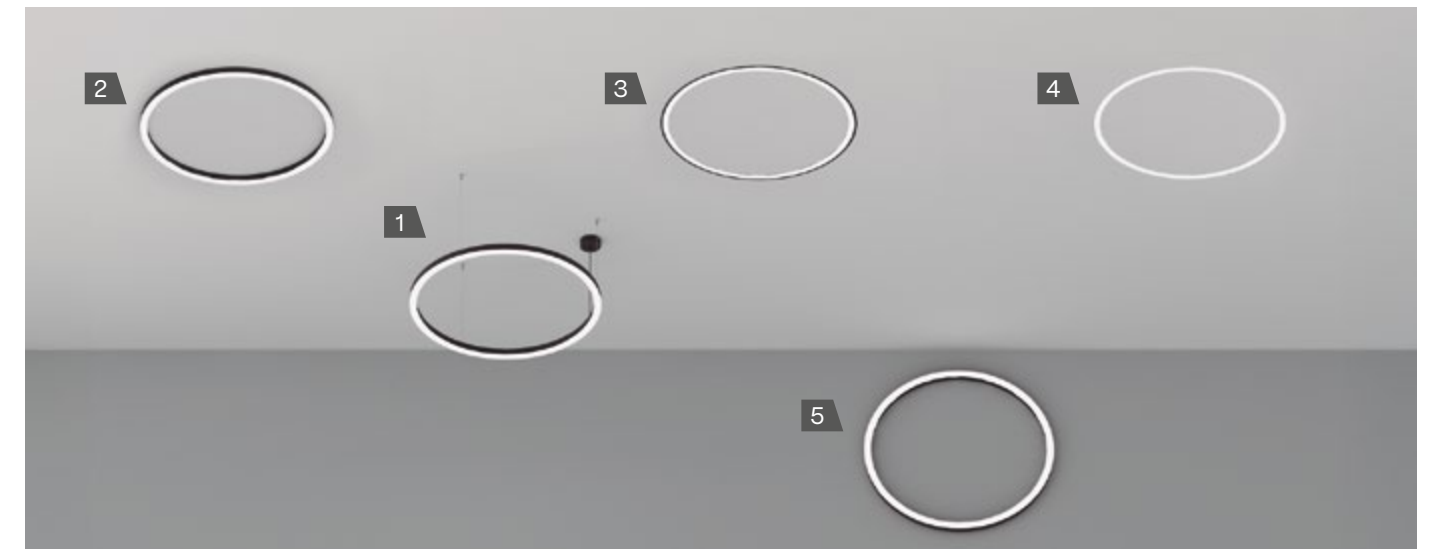


1. PENDANT - PENDANT UP LIGHT

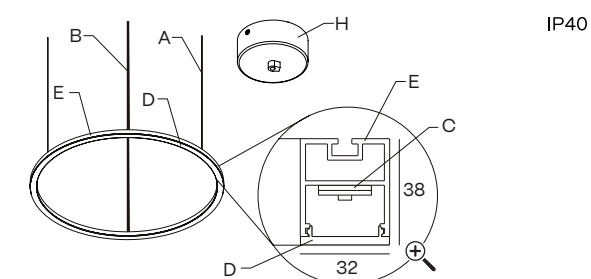


2. SURFACE

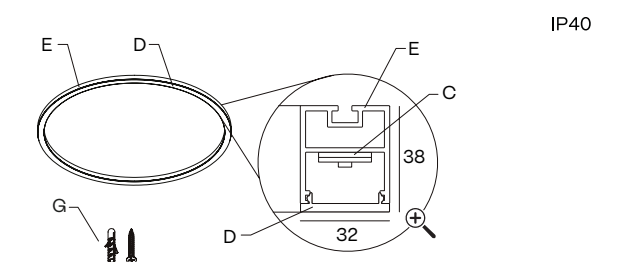


3. RECESSED WITH FRAME

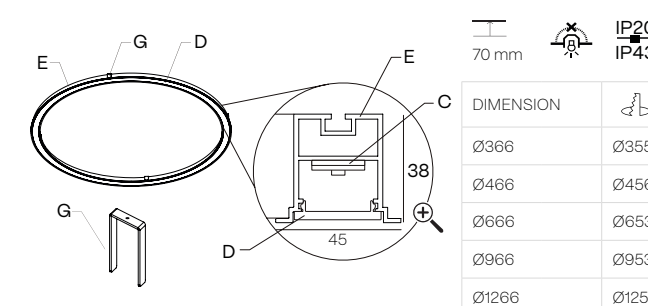

4. TRIMLESS

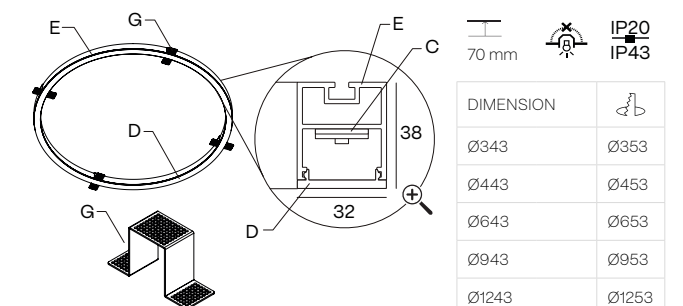

5. WALL SURFACE Ø350 mm to Ø1250 mm

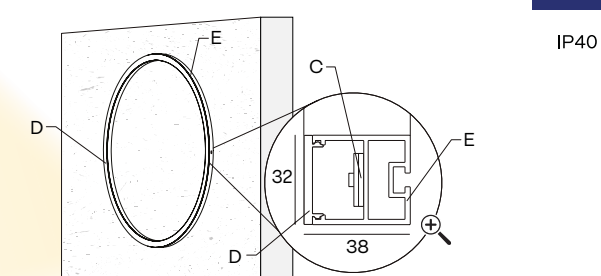

DIAMETERS mm.
350 · 450 · 650 · 950 · 1250 · 1500
2000 · 2500 · 3000 · 3500 · 4000
5000 · 6000
HEIGHT mm.
38

A - 3x aircraft cable (3 m)
B - Power cable
C - LED stripe
D - Diffuser

E - Aluminium profile
G - Mounting kit
H - Connection box not included

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material

<
>

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø102	.35	CB10
	 Ø150	.45 .65	CB02
	 Ø310	.95 .125 .150	CB05

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 Diagram showing a vertical line representing the suspension height, labeled 5m. A small icon of a person is shown at the top of the line, indicating the height of the person being suspended.	 Diagram showing a vertical line representing the suspension height, labeled 7m. A small icon of a person is shown at the top of the line, indicating the height of the person being suspended.	 Diagram showing a vertical line representing the suspension height, labeled 10m. A small icon of a person is shown at the top of the line, indicating the height of the person being suspended.
SC05.SA	SC07.SA	SC10.SA

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 Diagram showing a vertical line representing the suspension height, labeled 5m. A small icon of a person is shown at the top of the line, indicating the height of the person being suspended.	 Diagram showing a vertical line representing the suspension height, labeled 7m. A small icon of a person is shown at the top of the line, indicating the height of the person being suspended.	 Diagram showing a vertical line representing the suspension height, labeled 10m. A small icon of a person is shown at the top of the line, indicating the height of the person being suspended.
SC05.SA	SC07.SA	SC10.SA

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 Diagram showing a vertical line representing the suspension height, labeled 5m. A small icon of a person is shown at the top of the line, indicating the height of the person being suspended.	 Diagram showing a vertical line representing the suspension height, labeled 7m. A small icon of a person is shown at the top of the line, indicating the height of the person being suspended.	 Diagram showing a vertical line representing the suspension height, labeled 10m. A small icon of a person is shown at the top of the line, indicating the height of the person being suspended.
SC05.SA	SC07.SA	SC10.SA

POWER HIGH

						
		Int. Ø286 – Ext. Ø350	Int. Ø386 – Ext. Ø450	Int. Ø586 – Ext. Ø650	Int. Ø886 – Ext. Ø950	Int. Ø1186 – Ext. Ø1250
	24 V	13 W 908 – 950 – 1020 lm	18 W 1287 – 1346 – 1445 lm	25 W 1816 – 1900 – 2040 lm	37 W 2724 – 2850 – 3060 lm	48 W 3556 – 3721 – 3995 lm
	700 mA	56 W 5280 – 5316 – 5844 lm	76 W 7086 – 7121 – 7747 lm	88 W 8785 – 9040 – 9687 lm	132 W 13298 – 13519 – 14703 lm	176 W 17816 – 18118 – 18135 lm
Silicone	2700 K	140EC  312 	140ED  312 	140EF  312 	140EI  312 	140EK  312 
	3000 K	140EC  313 	140ED  313 	140EF  313 	140EI  313 	140EK  313 
	4000 K	140EC  315 	140ED  315 	140EF  315 	140EI  315 	140EK  315 



					
		Int. Ø1436 - Ext. Ø1500	Int. Ø1936 - Ext. Ø2000	Int. Ø2436 - Ext. Ø2500	Int. Ø2936 - Ext. Ø3000
	24 V	35 W 4174 - 4465 - 4794 lm	46 W 5595 - 5985 - 6426 lm	57 W 6927 - 7410 - 7956 lm	69 W 8437 - 8930 - 9588 lm
	500 mA	178 W 26176 - 31008 - 33376 lm	240 W 35174 - 41667 - 44849 lm	301 W 44172 - 52326 - 56322 lm	351 W 51534 - 61047 - 65709 lm
Silicone	2700 K	140EM   312 	140ER   312 	140ET   312 	140EW   312 
	3000 K	140EM   313 	140ER   313 	140ET   313 	140EW   313 
	4000 K	140EM   315 	140ER   315 	140ET   315 	140EW   315 

					
		Int. Ø3436 - Ext. Ø3500	Int. Ø3936 - Ext. Ø4000	Int. Ø4936 - Ext. Ø5000	Int. Ø5936 - Ext. Ø6000
	24 V	132 W N/A - 10450 - 11220 lm	92 W 11189 - 11970 - 12852 lm	115 W 13942 - 14915 - 16014 lm	138 W 16872 - 17955 - 19278 lm
	500 mA	423 W 62168 - 73644 - 79268 lm	473 W 69530 - 82365 - 88655 lm	602 W 88344 - 104652 - 112644 lm	713 W 104704 - 124032 - 133504 lm
Silicone	2700 K	140EX   312 	140EY   312 	140EZ   312 	125EN   312 
	3000 K	140EX   313 	140EY   313 	140EZ   313 	125EN   313 
	4000 K	140EX   315 	140EY   315 	140EZ   315 	125EN   315 


The data shown corresponds to raw values.

- 91


ALBERTA SLIGHT

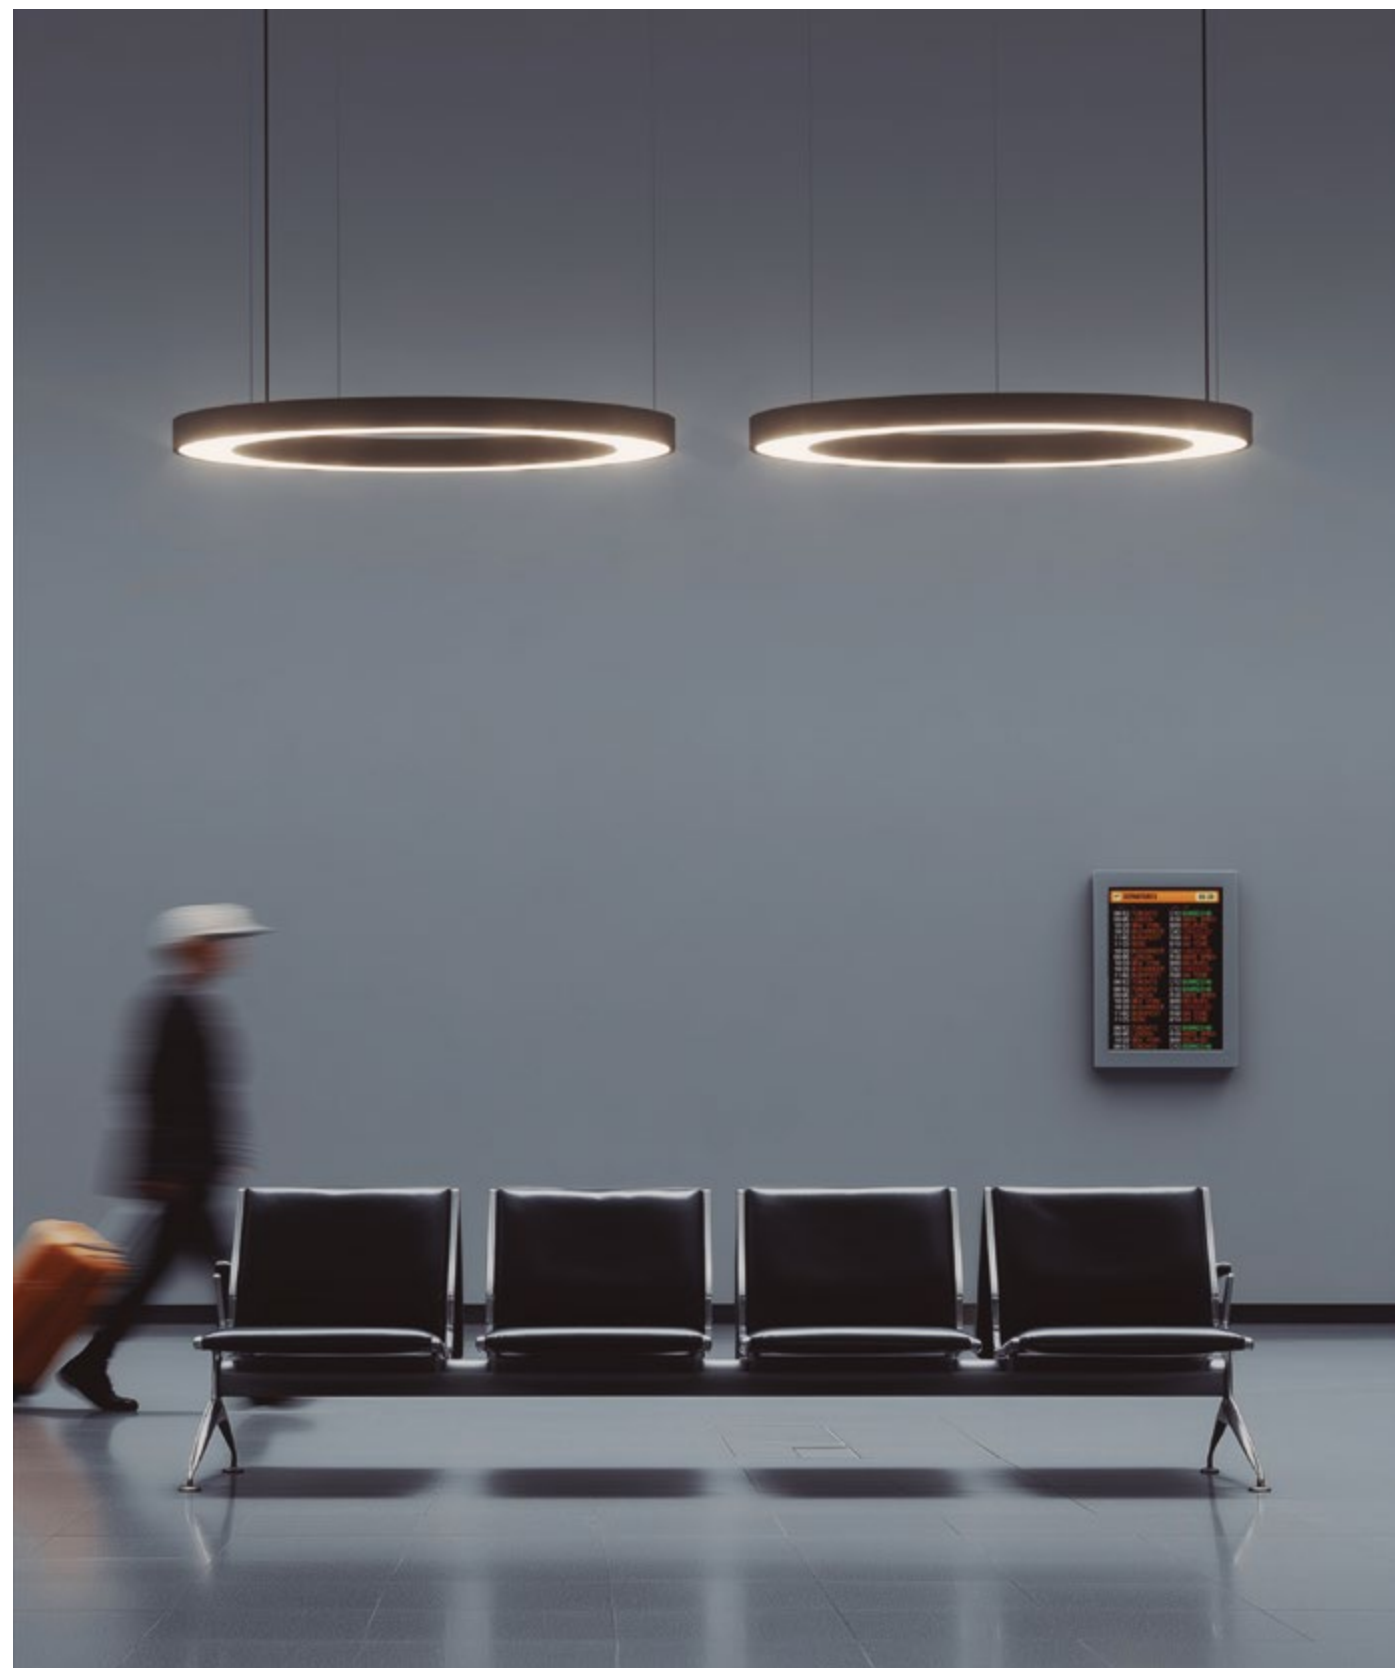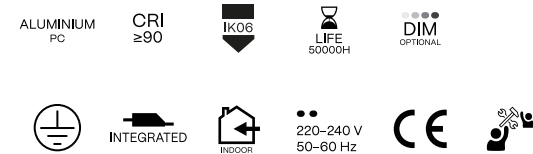


INSTALLATION

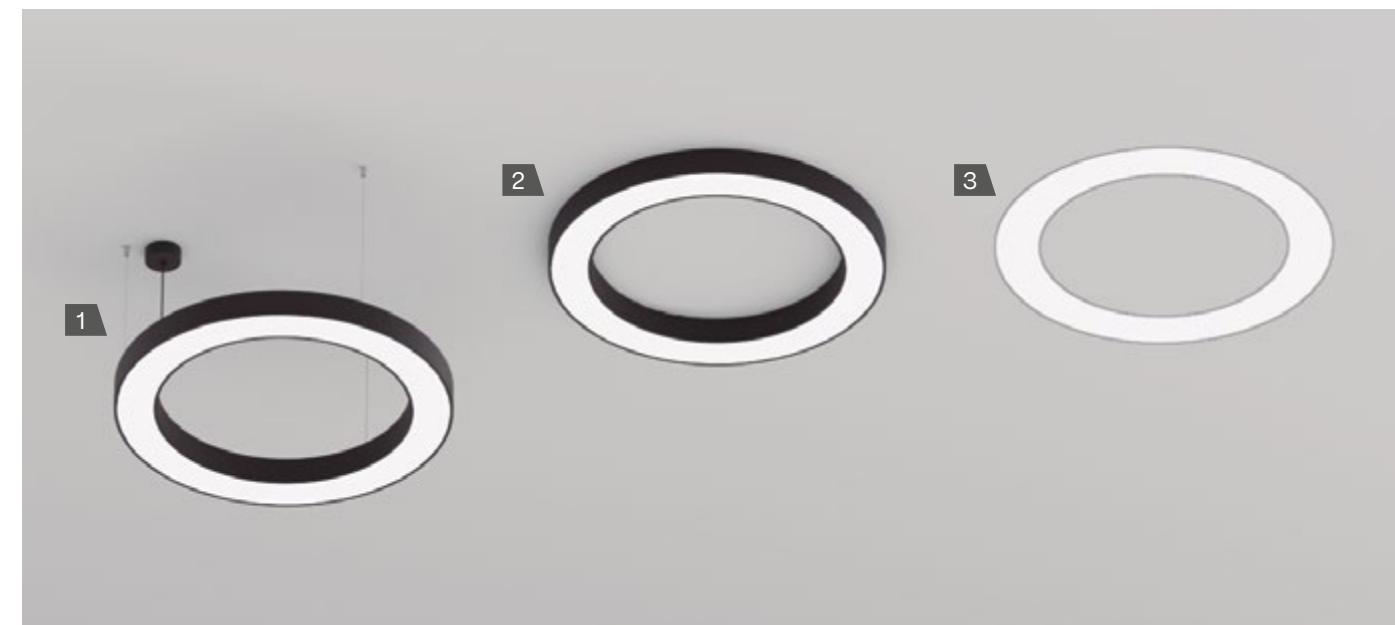


1. PENDANT – PENDANT UP LIGHT

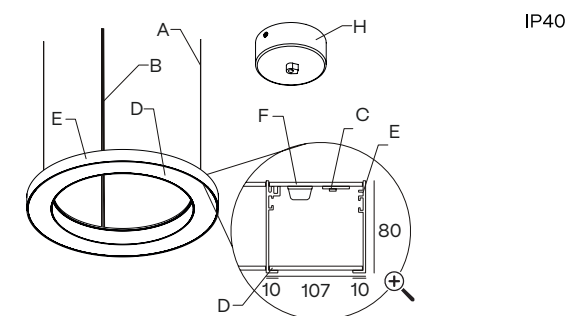

2. SURFACE

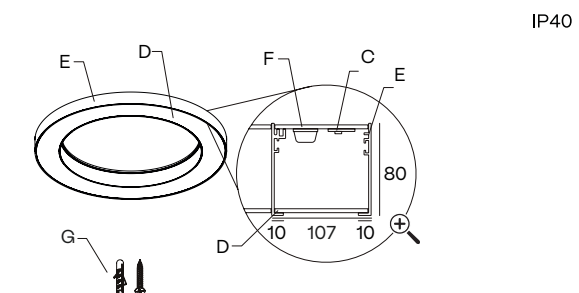

3. TRIMLESS

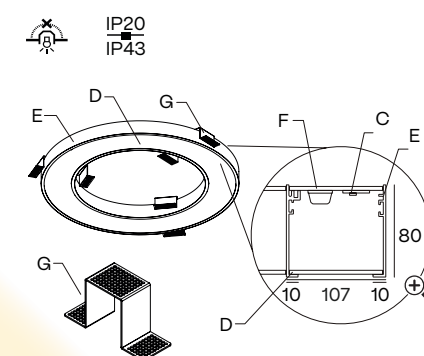

NEW			
DIMENSION		DIMENSION	
Int. Ø230 Ext. Ø450	Int. Ø229 Ext. Ø453	Int. Ø2220 Ext. Ø2500	Int. Ø2219 Ext. Ø2503
Int. Ø430 Ext. Ø650	Int. Ø429 Ext. Ø653	Int. Ø2720 Ext. Ø3000	Int. Ø2719 Ext. Ø3003
Int. Ø710 Ext. Ø950	Int. Ø709 Ext. Ø953	Int. Ø3720 Ext. Ø4000	Int. Ø3719 Ext. Ø4003
Int. Ø990 Ext. Ø1250	Int. Ø989 Ext. Ø1253	Int. Ø4700 Ext. Ø5000	Int. Ø4699 Ext. Ø5003
Int. Ø1240 Ext. Ø1500	Int. Ø1239 Ext. Ø1503	Int. Ø5700 Ext. Ø6000	Int. Ø5699 Ext. Ø6003
Int. Ø1740 Ext. Ø2000	Int. Ø1739 Ext. Ø2003		

Diffuser width may vary by a few millimeters depending on the product diameter. Please refer to the data provided for each model.

DIAMETERS mm.

450 · 650 · 950 · 1250 · 1500 · 2000
2500 · 3000 · 4000 · 5000 · 6000

HEIGHT mm.

80

A – 3× aircraft cable (3 m)

B – Power cable

C – LED module

D – Diffuser

E – Aluminium profile

F – Aluminium cover

G – Mounting kit

H – Included connection box



Cut hole



Minimum height of the false ceiling



Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø150	.45 .65	CB02
	 Ø310	.95 .125	CB05

CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø125	.45 .65	SC22
	 Ø215	.95 .125	SC23

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA

FINISH

B · Black

W · White

S · Special color

ON DEMAND OPTIONS

 Special finishes

 Special color temperatures

 Number switches

 Custom dimensions

 Emergency lighting

 Motion detection

 Wireless control options


 Surface/Wall sfc. up light

TECHNICAL INFORMATION

POWER STANDARD

		 Int. Ø230 - Ext. Ø450	 Int. Ø430 - Ext. Ø650	 Int. Ø710 - Ext. Ø950	 Int. Ø990 - Ext. Ø1250	 Int. Ø1240 - Ext. Ø1500	 Int. Ø1740 - Ext. Ø2000
	24 V	18 W 1287 - 1346 - 1445 lm	25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm	35 W 4174 - 4300 - 4554 lm	46 W 5595 - 5765 - 6105 lm
	700 mA	32 W 3157 - 3430 - 3500 lm	49 W 4938 - 5185 - 5444 lm	78 W 7901 - 8296 - 8711 lm	118 W 11851 - 12444 - 13066 lm	137 W 14814 - 15555 - 16333 lm	196 W 20740 - 21777 - 22866 lm
	Opal	2700 K 125ED  112 	125EF  112 	125EI  112 	125EK  112 	125EM  112 	125ER  112 
		3000 K 125ED  113 	125EF  113 	125EI  113 	125EK  113 	125EM  113 	125ER  113 
		4000 K 125ED  115 	125EF  115 	125EI  115 	125EK  115 	125EM  115 	125ER  115 
	Microprismatic	2700 K 125ED  122 	125EF  122 	125EI  122 	125EK  122 	125EM  122 	125ER  122 
		3000 K 125ED  123 	125EF  123 	125EI  123 	125EK  123 	125EM  123 	125ER  123 
		4000 K 125ED  125 	125EF  125 	125EI  125 	125EK  125 	125EM  125 	125ER  125 

		 Int. Ø2220 - Ext. Ø2500	 Int. Ø2720 - Ext. Ø3000	 Int. Ø3720 - Ext. Ø4000	 Int. Ø4700 - Ext. Ø5000	 Int. Ø5700 - Ext. Ø6000
	24 V	57 W 6927 - 7137 - 7559 lm	69 W 8437 - 8693 - 9206 lm	92 W 11189 - 11529 - 12210 lm	115 W 13942 - 14366 - 15213 lm	138 W 16872 - 17385 - 18411 lm
	700 mA	235 W 25184 - 26444 - 2766 lm	314 W 31604 - 33184 - 34843 lm	412 W 41480 - 43554 - 45732 lm	470 W 47406 - 49776 - 52265 lm	588 W 59257 - 62220 - 65331 lm
	Opal	2700 K 125ET  112 	125EW  112 	125EY  112 	125EZ  112 	125EN  112 
		3000 K 125ET  113 	125EW  113 	125EY  113 	125EZ  113 	125EN  113 
		4000 K 125ET  115 	125EW  115 	125EY  115 	125EZ  115 	125EN  115 
	Microprismatic	2700 K 125ET  122 	125EW  122 	125EY  122 	125EZ  122 	125EN  122 
		3000 K 125ET  123 	125EW  123 	125EY  123 	125EZ  123 	125EN  123 
		4000 K 125ET  125 	125EW  125 	125EY  125 	125EZ  125 	125EN  125 

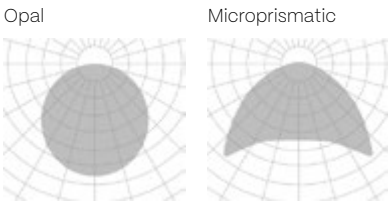

The data shown corresponds to raw values.

INSTALLATION

1 · Pendant

2 · Pendant up light

3 · Surface

6 · Trimless

FINISH

B · Black

W · White

S · Special color

DIMM OPTIONS

O · On-Off

D · Dali


P · Push

V · 1.10v

 Up light

 Down light


ALBERTA

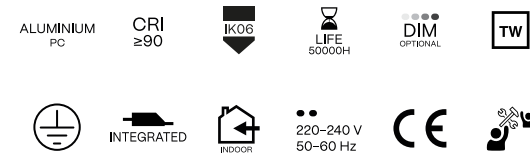


INSTALLATION




1. PENDANT – PENDANT UP LIGHT

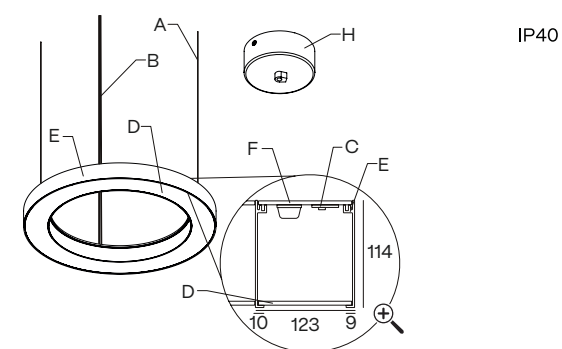


2. SURFACE

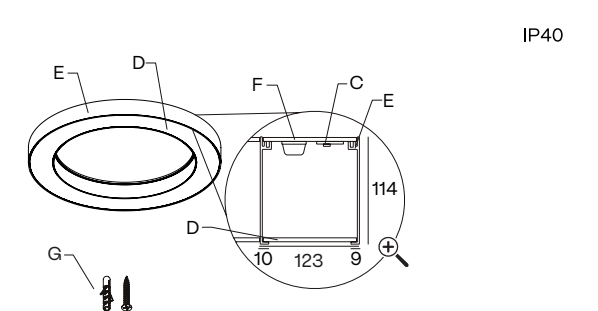

3. RECESSED WITH FRAME

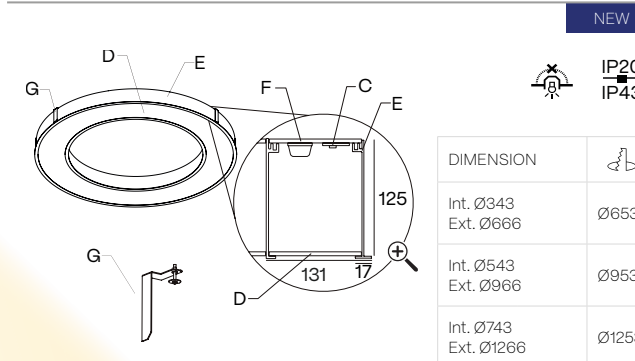

4. TRIMLESS

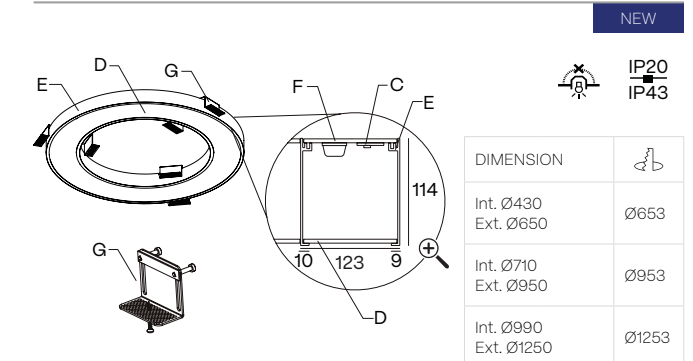

Diffuser width may vary by a few millimeters depending on the product diameter. Please refer to the data provided for each model.

DIAMETERS mm.
650 · 950 · 1250

HEIGHT mm.
114 · 125


A – 3x aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser


E – Aluminium profile
F – Aluminium cover
G – Mounting kit
H – Included connection box




Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø150	.65	CB02 
	 Ø310	.95 .125	CB05 

CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø125 + CB02	.65	SC22 
	 Ø215 + CB05	.95 .125	SC23 

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA

-  **FINISH**
- B** · Black
 - W** · White
 - S** · Special color

 ON DEMAND OPTIONS

-  Special finishes
-  Special color temperatures
-  Number switches
-  CRI 80
-  Custom dimensions
-  Emergency lighting
-  Motion detection
-  Wireless control options
-  Surface/Wall sfc. up light
-  RGB


TECHNICAL INFORMATION

POWER STANDARD

		 Int. Ø420 - Ext. Ø650	 Int. Ø690 - Ext. Ø950	 Int. Ø990 - Ext. Ø1250
 24 V		25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
	 500 mA	24 W 4090 - 4845 - 5215 lm	47 W 6544 - 7752 - 8344 lm	48 W 9816 - 11628 - 12516 lm
Opal	2700 K	120EF   112 	120EI   112 	120EK   112 
	3000 K	120EF   113 	120EI   113 	120EK   113 
	4000 K	120EF   115 	120EI   115 	120EK   115 
Microprismatic	2700 K	120EF   122 	120EI   122 	120EK   122 
	3000 K	120EF   123 	120EI   123 	120EK   123 
	4000 K	120EF   125 	120EI   125 	120EK   125 

POWER HIGH

		 Int. Ø420 - Ext. Ø650	 Int. Ø690 - Ext. Ø950	 Int. Ø990 - Ext. Ø1250
 24 V		25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
	 500 mA	59 W 8430 - 9690 - 10430 lm	94 W 13488 - 15504 - 16688 lm	48 W 20232 - 23256 - 25032 lm
Opal	2700 K	120EF   312 	120EI   312 	120EK   312 
	3000 K	120EF   313 	120EI   313 	120EK   313 
	4000 K	120EF   315 	120EI   315 	120EK   315 
Microprismatic	2700 K	120EF   322 	120EI   322 	120EK   322 
	3000 K	120EF   323 	120EI   323 	120EK   323 
	4000 K	120EF   325 	120EI   325 	120EK   325 

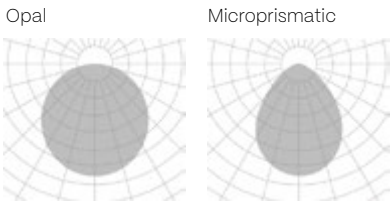

The data shown corresponds to raw values.

 INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless

 FINISH


- B** · Black
- W** · White
- S** · Special color

 DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

-  Up light
-  Down light


FLORIDA FAMILY

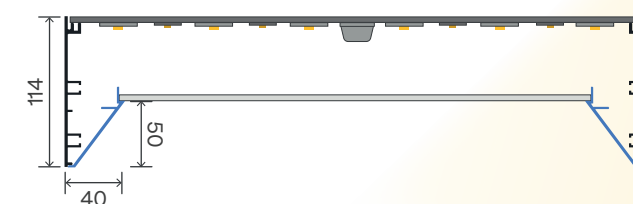

FLORIDA | DECO | SQ
REF. 160 | 161 | 162
PAG. 106 | 102 | 110

FLORIDA DECO


NEW

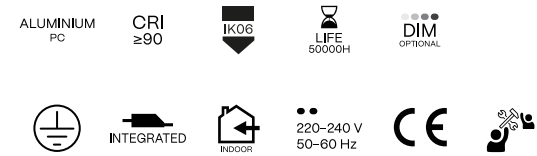

INSTALLATION




1. PENDANT

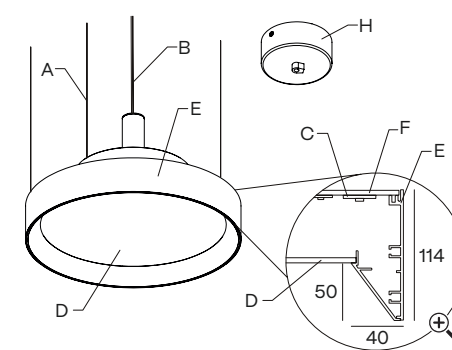

IP40

2. SURFACE

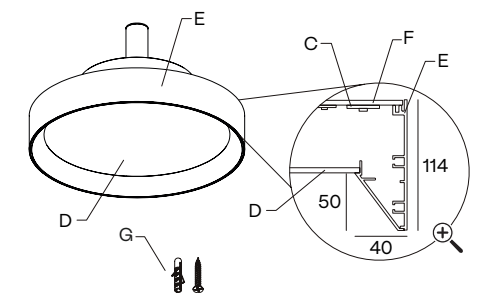

IP40

DIAMETERS mm.

450 · 650

HEIGHT mm.

114

A - 3x aircraft cable (3 m)

B - Power cable

C - LED module

D - Diffuser

E - Aluminium profile

F - Aluminium cover

G - Mounting kit

H - Included connection box






COMPONENTS

TECHNICAL INFORMATION



PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.35	CB10 
	 26 Ø150	.45 .65	CB02 
	 47 Ø310	.95 .125	CB05 

CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 +  CB10	.35	SC21 
	 +  CB02	.45 .65	SC22 
	 +  CB05	.95 .125	SC23 

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		
5m	7m	10m
SC05.SA	SC07.SA	SC10.SA

POWER STANDARD

		 Ø450	 Ø650
 mA		49 W 4938 – 5185 – 5444 lm	118 W 11851 – 12444 – 13066 lm
	Opal	2700 K	161ED   112 
		3000 K	161ED   113 
Microprismatic	Opal	4000 K	161ED   115 
		2700 K	161ED   122 
	Microprismatic	3000 K	161ED   123 
		4000 K	161ED   125 

-  **FINISH**
- B** · Black
 - W** · White
 - S** · Special color

 ON DEMAND OPTIONS


-  Special finishes
-  Number switches
-  Surface/Wall sfc. up light
-  Emergency lighting
-  Motion detection
-  Wireless control options

-  **INSTALLATION**
- 1** · Pendant
 - 3** · Surface

-  **FINISH**
- B** · Black
 - W** · White
 - S** · Special color
 - H** · White – Black
 - G** · Black – White

-  **DIMM OPTIONS**
- O** · On–Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

 Down light

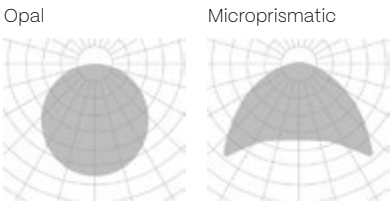

The data shown corresponds to raw values.

FLORIDA

ALUMINIUM
PC

CRI
≥90


IK06

LIFE
50000H


DIM
OPTIONAL




INSTALLATION

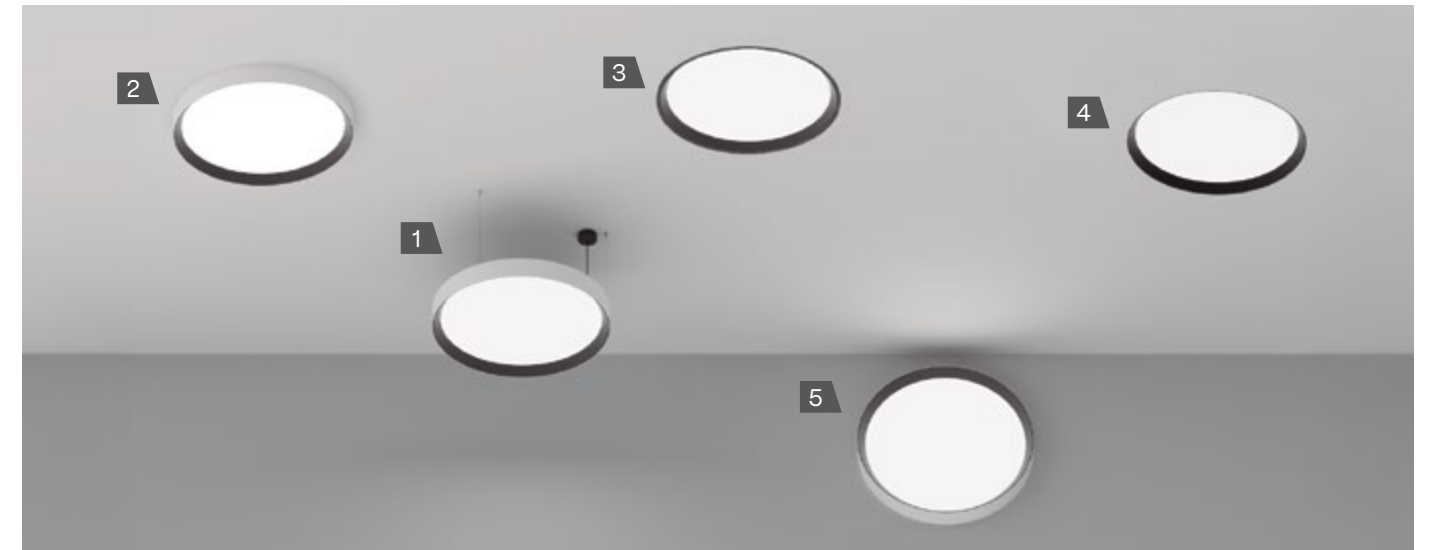


1. PENDANT – PENDANT UP LIGHT

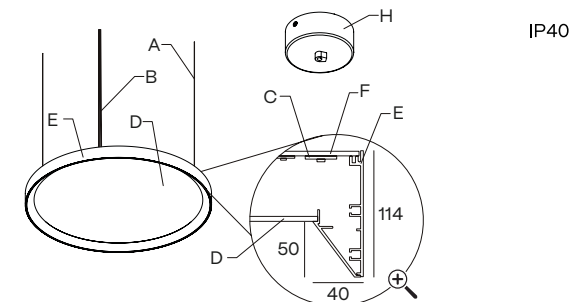


2. SURFACE

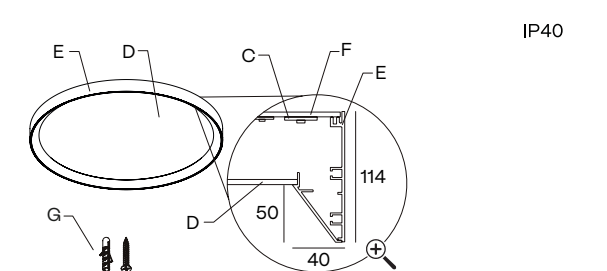


3. RECESSED WITH FRAME

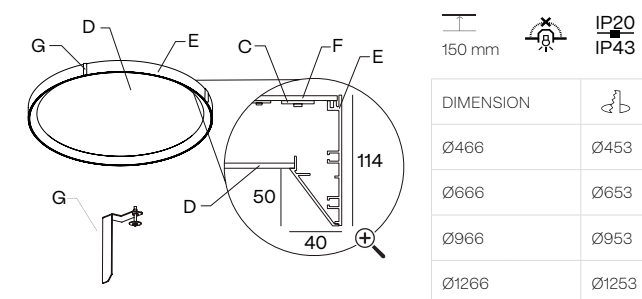

4. TRIMLESS

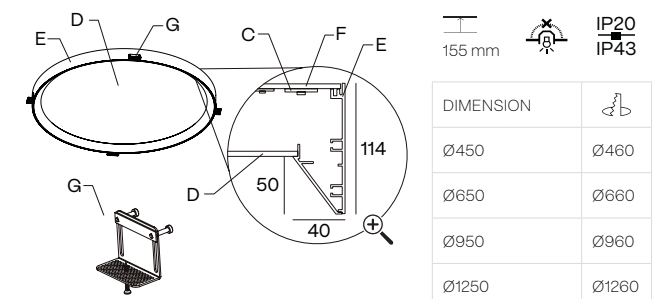

5. WALL SURFACE

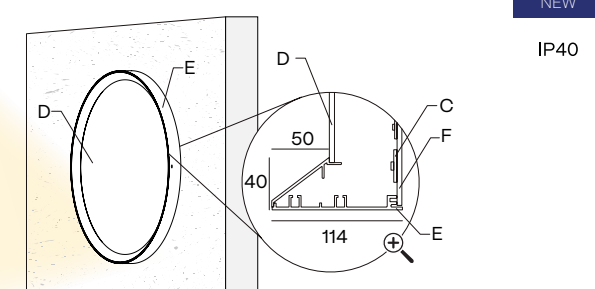

DIAMETERS mm.
450 · 650 · 950 · 1250

HEIGHT mm.
114


A – 3× aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser



E – Aluminium profile
F – Aluminium cover
G – Mounting kit
H – Included connection box


Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material




COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø150	.45 .65	CB02 
	 Ø310	.95 .125	CB05 

CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø125	.45 .65	SC22 
	 Ø215	.95 .125	SC23 

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE
	 Ø102	600 mm	SC20.60 
		800 mm	SC20.80 
		1000 mm	SC20.100 

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA

-  **FINISH**
B · Black
W · White
S · Special color
-  **ON DEMAND OPTIONS**

 Special finishes

 Emergency lighting

 Number switches

 Motion detection


 Surface/Wall sfc. up light

 Wireless control options

TECHNICAL INFORMATION

POWER STANDARD

		 Ø450	 Ø650	 Ø950	 Ø1250
	24 V	18 W 1287 – 1346 – 1445 lm	25 W 1816 – 1900 – 2040 lm	37 W 2724 – 2850 – 3060 lm	48 W 3556 – 3721 – 3995 lm
	 700 mA	49 W 4938 – 5185 – 5444 lm	118 W 11851 – 12444 – 13066 lm	216 W 21728 – 22814 – 23955 lm	353 W 34567 – 36295 – 38110 lm
	Opal	2700 K 160ED  112 	160EF  112 	160EI  112 	160EK  112 
Micropismatic	3000 K	160ED  113 	160EF  113 	160EI  113 	160EK  113 
	4000 K	160ED  115 	160EF  115 	160EI  115 	160EK  115 
	2700 K	160ED  122 	160EF  122 	160EI  122 	160EK  122 
Micropismatic	3000 K	160ED  123 	160EF  123 	160EI  123 	160EK  123 
	4000 K	160ED  125 	160EF  125 	160EI  125 	160EK  125 

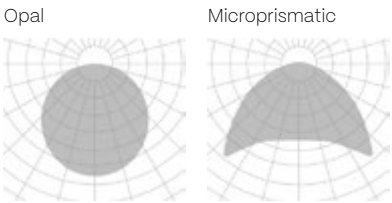

The data shown corresponds to raw values.

-  **INSTALLATION**
1 · Pendant
2 · Pendant up light
3 · Surface
5 · Recessed with frame
6 · Trimless
7 · Wall Surface
-  **FINISH**
B · Black
W · White
S · Special color
H · White – Black
G · Black – White
-  **DIMM OPTIONS**
O · On–Off
D · Dali
P · Push
V · 1.10v
-  Up light
 Down light

FLORIDA SQ

ALUMINIUM
PC

CRI
≥90

IK06

LIFE
50000h


DIM
OPTIONAL




INSTALLATION




1. PENDANT - PENDANT UP LIGHT

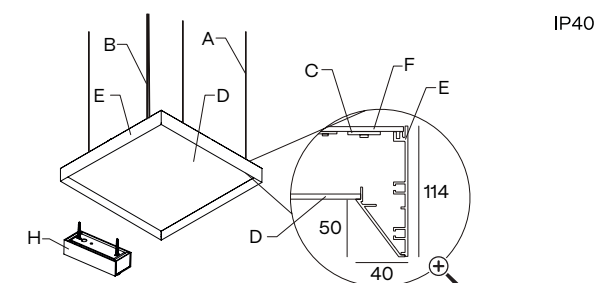


2. SURFACE

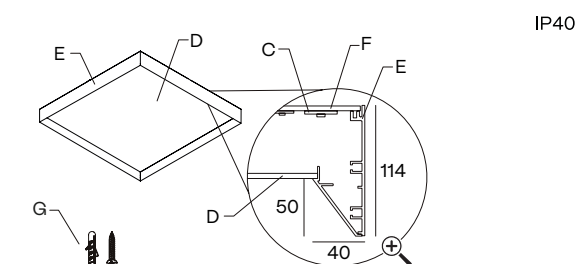


3. RECESSED WITH FRAME

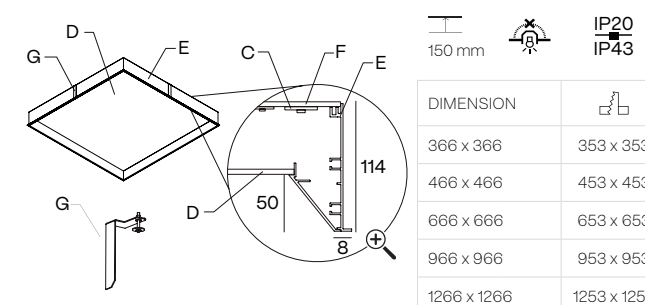

4. TRIMLESS

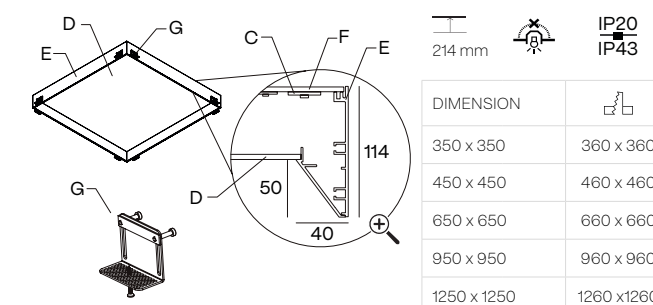

5. WALL SURFACE

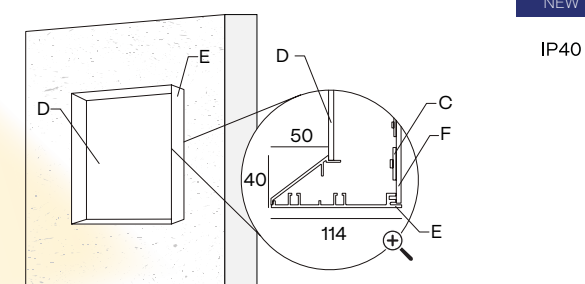

WIDTH x LENGTH mm.

350 x 350 · 450 x 450 · 650 x 650
950 x 950 · 1250 x 1250

HEIGHT mm.

114

A - 4x aircraft cable (3 m)

B - Power cable

C - LED module

D - Diffuser

E - Aluminium profile

F - Aluminium cover

G - Mounting kit

H - Included connection box

✂ Cut hole

⏏ Minimum height of the false ceiling

⚠ Luminaire not suitable to be covered with thermal insulating material



COMPONENTS

TECHNICAL INFORMATION

PENDANT


CONNECTION BOX	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
CB09.12.	SC05.SA	SC07.SA	SC10.SA

POWER STANDARD

		350 x 350	450 x 450	650 x 650	950 x 950	1250 x 1250
	24 V	13 W 908 - 950 - 1020 lm	18 W 1287 - 1346 - 1445 lm	25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
	700 mA	29 W 2963 - 3111 - 3267 lm	59 W 5926 - 6222 - 6533 lm	118 W 11851 - 12444 - 13066 lm	235 W 23703 - 24888 - 26132 lm	392 W 39505 - 41480 - 43554 lm
Opal	2700 K	162EC 112	162ED 112	162EF 112	162EI 112	162EK 112
	3000 K	162EC 113	162ED 113	162EF 113	162EI 113	162EK 113
	4000 K	162EC 115	162ED 115	162EF 115	162EI 115	162EK 115
Microprismatic	2700 K	162EC 122	162ED 122	162EF 122	162EI 122	162EK 122
	3000 K	162EC 123	162ED 123	162EF 123	162EI 123	162EK 123
	4000 K	162EC 125	162ED 125	162EF 125	162EI 125	162EK 125

- FINISH**
- B · Black
 - W · White
 - S · Special color


- ON DEMAND OPTIONS**
- Special finishes
 - Number switches
 - Surface/Wall sfc. up light
 - Emergency lighting
 - Motion detection
 - Wireless control options

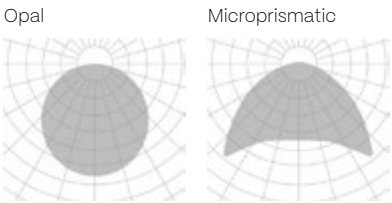


The data shown corresponds to raw values.

- INSTALLATION**
- 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 5 · Recessed with frame
 - 6 · Trimless
 - 7 · Wall Surface
- FINISH**
- B · Black
 - W · White
 - S · Special color
 - H · White - Black
 - G · Black - White
- DIMM OPTIONS**
- O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- Up light
- Down light


ALABAMA FAMILY

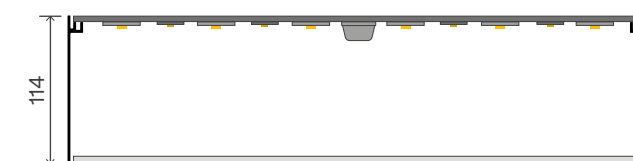


ALABAMA | LOOP | STONE
REF. 100 | 101 | 105
PAG. 124 | 120 | 116

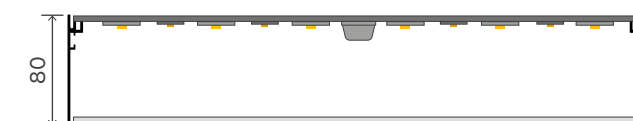

ALABAMA SLIGHT | SQ
REF. 102 | 103
PAG. 128 | 132

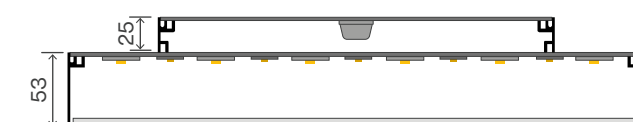


ALABAMA SLIM
REF. 104
PAG. 136



ALABAMA SUPER SLIM
REF. 106
PAG. 140

ALABAMA STONE


NEW

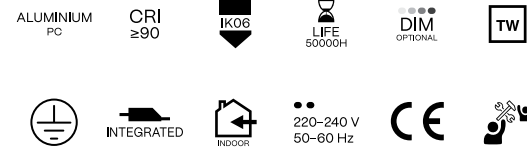

INSTALLATION




1. PENDANT

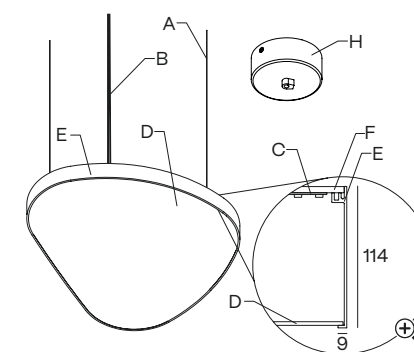

IP40

2. SURFACE

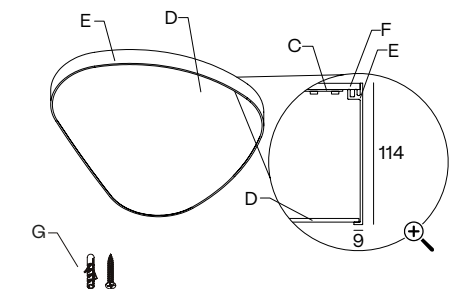

IP40

WIDTH x LENGTH mm.

1315 x 1100

HEIGHT mm.

114

A - 3x aircraft cable (3 m)

B - Power cable

C - LED module

D - Diffuser

E - Aluminium profile

F - Aluminium cover

G - Mounting kit

H - Included connection box


COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.35	CB10
	 26 Ø150	.45 .65	CB02
	 47 Ø310	.95 .125	CB05

CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø85 +  CB10	.35	SC21
	 Ø125 +  CB02	.45 .65	SC22
	 Ø215 +  CB05	.95 .125	SC23


CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE
	 40 Ø102	600 mm	SC20.60
		800 mm	SC20.80
		1000 mm	SC20.100


SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA

FINISH	ON DEMAND OPTIONS
B · Black W · White S · Special color	 Special finishes  Special color temperatures  CRI 80  RGB  Emergency lighting  Motion detection  Wireless control options  Surface/Wall sfc. up light

TECHNICAL INFORMATION

POWER STANDARD

		1315 x 1100	
500 mA		29 W 58960 – 67830 – 73010 lm	
Opal	2700 K	105EB  112 	
	3000 K	105EB  113 	
	4000 K	105EB  115 	
Microprismatic	2700 K	105EB  122 	
	3000 K	105EB  123 	
	4000 K	105EB  125 	

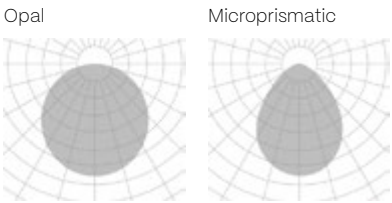


The data shown corresponds to raw values.

INSTALLATION	FINISH	DIMM OPTIONS	Down light
1 · Pendant 3 · Surface	B · Black W · White S · Special color	O · On-Off D · Dali P · Push V · 1.10v	

ALABAMA LOOP


NEW

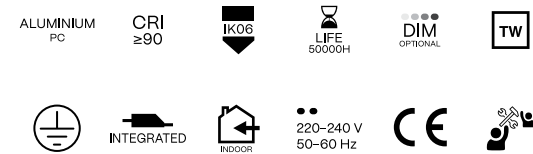

INSTALLATION




1. PENDANT

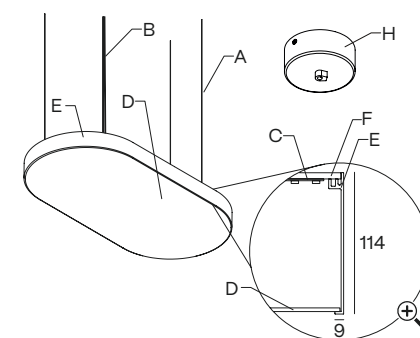

IP40

2. SURFACE

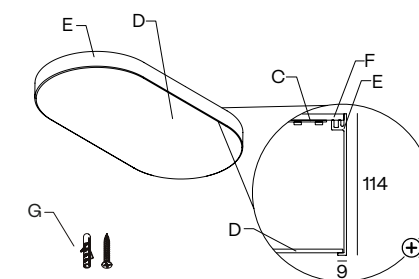

IP40

WIDTH x LENGTH mm.
700 x 350 · 900 x 450 · 1300 x 650

HEIGHT mm.
114


A – 3x aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser

E – Aluminium profile
F – Aluminium cover
G – Mounting kit
H – Included connection box



COMPONENTS

PENDANT

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE
		600 mm	SC20.60 
		800 mm	SC20.80 
		1000 mm	SC20.100 

TECHNICAL INFORMATION


POWER STANDARD

				
		700 x 350	900 x 450	1300 x 650
 500 mA		45 W 6544 – 7752 – 8344 lm	61 W 8998 – 10659 – 11473 lm	145 W 21268 – 25194 – 27118 lm
	Opal	2700 K 101EC  112 	101ED  112 	101EF  112 
		3000 K 101EC  113 	101ED  113 	101EF  113 
		4000 K 101EC  115 	101ED  115 	101EF  115 
Microprismatic	2700 K	101EC  122 	101ED  122 	101EF  122 
	3000 K	101EC  123 	101ED  123 	101EF  123 
	4000 K	101EC  125 	101ED  125 	101EF  125 


POWER HIGH

				
		700 x 350	900 x 450	1300 x 650
 500 mA		89 W 13488 – 15504 – 16688 lm	123 W 18496 – 21318 – 22946 lm	290 W 43836 – 50388 – 54236 lm
	Opal	2700 K 101EC  312 	101ED  312 	101EF  312 
		3000 K 101EC  313 	101ED  313 	101EF  313 
		4000 K 101EC  315 	101ED  315 	101EF  315 
Microprismatic	2700 K	101EC  322 	101ED  322 	101EF  322 
	3000 K	101EC  323 	101ED  323 	101EF  323 
	4000 K	101EC  325 	101ED  325 	101EF  325 

Opal



Microprismatic



The data shown corresponds to raw values.

-  **FINISH**
- B · Black
 - W · White
 - S · Special color



ON DEMAND OPTIONS



Special finishes



Special color temperatures



CRI 80



RGB



Emergency lighting



Motion detection



Wireless control options



Surface/Wall sfc. up light

 INSTALLATION

- 1 · Pendant
- 3 · Surface

 FINISH

- B · Black
- W · White
- S · Special color

 DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

 Down light

ALABAMA

ALUMINIUM
PC

CRI
≥90

IK06

LIFE
50000H

DIM
OPTIONAL

TW
STARTING
FROM 0450

220-240 V
50-60 Hz


CE

INTEGRATED


INDOOR




INSTALLATION

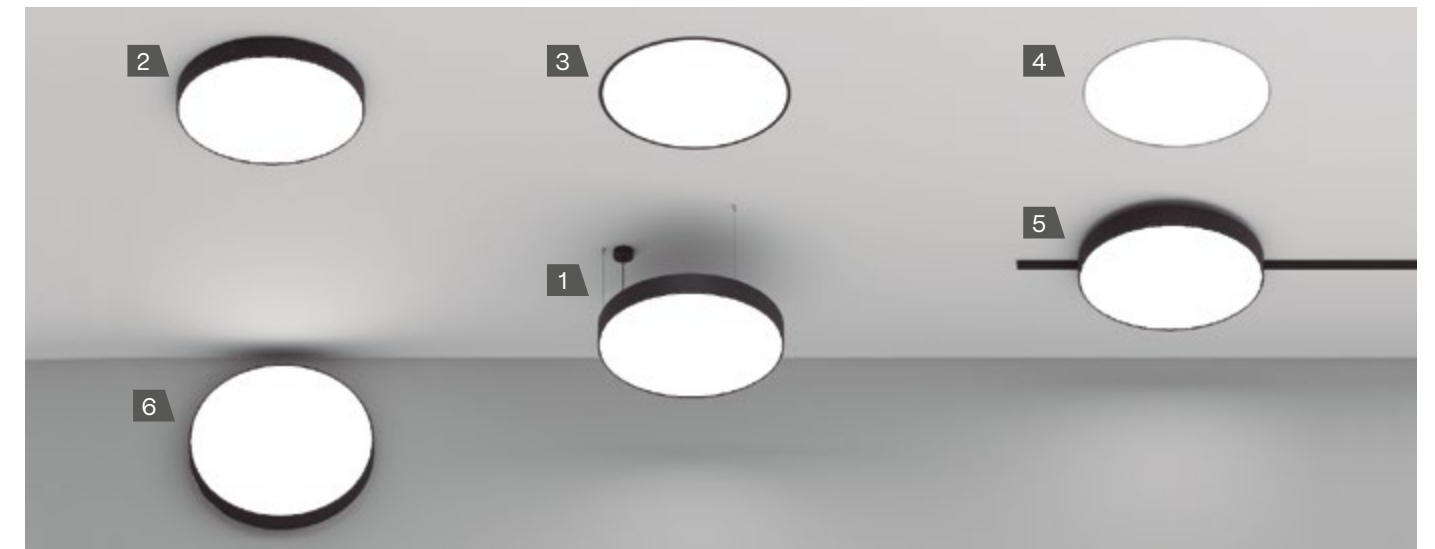


1. PENDANT - PENDANT UP LIGHT

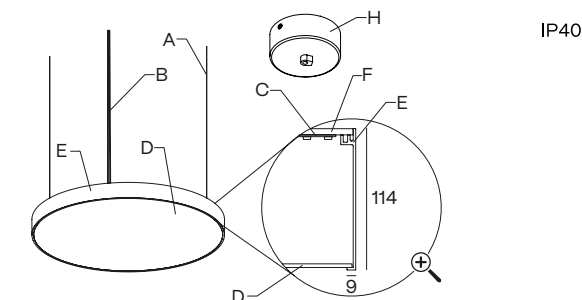


2. SURFACE

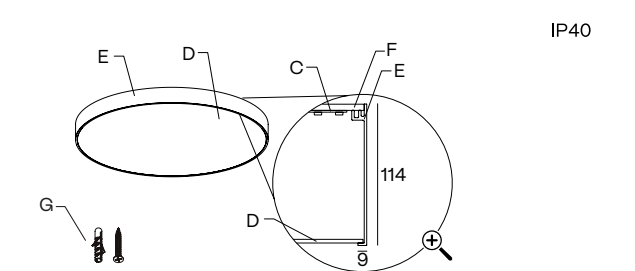


3. RECESSED WITH FRAME

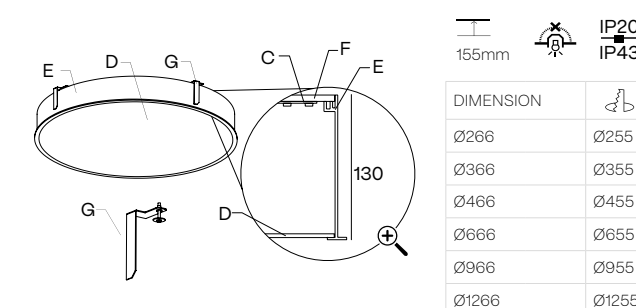


4. TRIMLESS

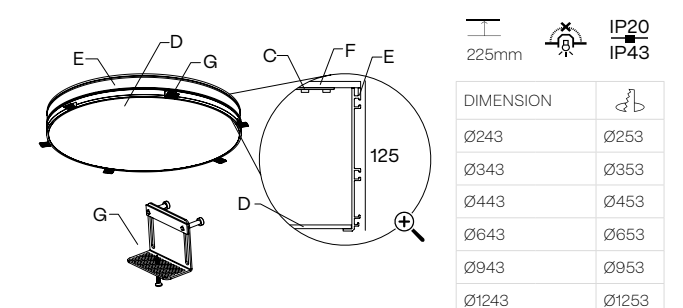

5. TRACKLIGHT Ø250 mm to Ø650 mm

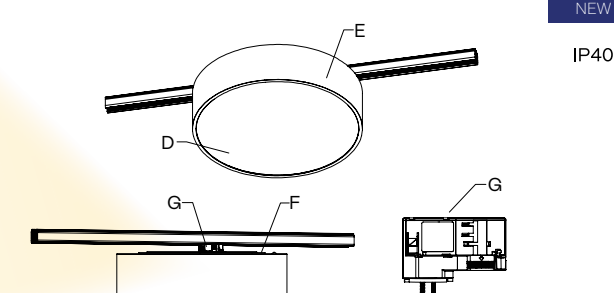

6. WALL SURFACE Ø250 mm and Ø1250 mm only

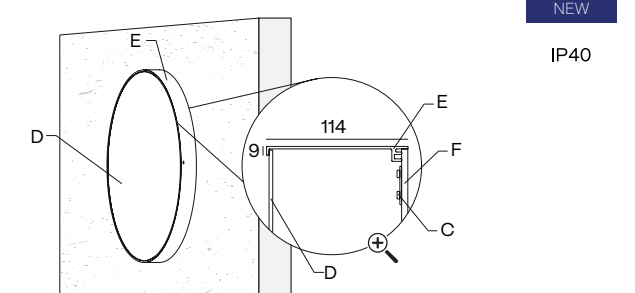

DIAMETERS mm.

250 · 350 · 450 · 650 · 950 · 1250

HEIGHT mm.

114 · 125

A - 3x aircraft cable (3 m)

B - Power cable

C - LED module

D - Diffuser

E - Aluminium profile

F - Aluminium cover

G - Mounting kit

H - Included connection box






✂ Cut hole

⏏ Minimum height of the false ceiling

⚠ Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø102 40	.35	CB10		 Ø85 + CB10	.35	SC21
	 Ø150 26 Ø150 65	.45 .65	CB02		 Ø125 + CB02	.45 .65	SC22
	 Ø310 47	.95 .125	CB05		 Ø215 + CB05	.95 .125	SC23
CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m	
	 Ø102 40	600 mm	SC20.60	 5m	 7m	 10m	
		800 mm	SC20.80				
		1000 mm	SC20.100				
				SC05.SA	SC07.SA	SC10.SA	

Luminaire .95 and .125 require 3 rod suspensions.


TECHNICAL INFORMATION

POWER STANDARD

		Ø250	Ø350	Ø450	Ø650	Ø950	Ø1250
	24V	- -	13 W 908 - 950 - 1020 lm	18 W 1287 - 1346 - 1445 lm	25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
		8 W 1227 - 1454 - 1565 lm	17 W 2454 - 2907 - 3129 lm	33 W 4908 - 5814 - 6258 lm	67 W 9816 - 11628 - 12516 lm	123 W 17966 - 21318 - 22946 lm	201 W 29448 - 34884 - 37548 lm
Opal	2700 K	100EB 112 ✖	100EC 112 ✖	100ED 112 ✖	100EF 112 ✖	100EI 112 ✖	100EK 112 ✖
	3000 K	100EB 113 ✖	100EC 113 ✖	100ED 113 ✖	100EF 113 ✖	100EI 113 ✖	100EK 113 ✖
	4000 K	100EB 115 ✖	100EC 115 ✖	100ED 115 ✖	100EF 115 ✖	100EI 115 ✖	100EK 115 ✖
Microprismatic	2700 K	100EB 122 ✖	100EC 122 ✖	100ED 122 ✖	100EF 122 ✖	100EI 122 ✖	100EK 122 ✖
	3000 K	100EB 123 ✖	100EC 123 ✖	100ED 123 ✖	100EF 123 ✖	100EI 123 ✖	100EK 123 ✖
	4000 K	100EB 125 ✖	100EC 125 ✖	100ED 125 ✖	100EF 125 ✖	100EI 125 ✖	100EK 125 ✖

POWER HIGH

		Ø250	Ø350	Ø450	Ø650	Ø950	Ø1250
	24V	- -	13 W 908 - 950 - 1020 lm	18 W 1287 - 1346 - 1445 lm	25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
		17 W 2454 - 2907 - 3129 lm	33 W 5008 - 5814 - 6258 lm	67 W 10116 - 11628 - 12516 lm	134 W 20232 - 23256 - 25032 lm	245 W 37092 - 42636 - 45892 lm	401 W 60966 - 69768 - 75096 lm
Opal	2700 K	100EB 312 ✖	100EC 312 ✖	100ED 312 ✖	100EF 312 ✖	100EI 312 ✖	100EK 312 ✖
	3000 K	100EB 313 ✖	100EC 313 ✖	100ED 313 ✖	100EF 313 ✖	100EI 313 ✖	100EK 313 ✖
	4000 K	100EB 315 ✖	100EC 315 ✖	100ED 315 ✖	100EF 315 ✖	100EI 315 ✖	100EK 315 ✖
Microprismatic	2700 K	100EB 322 ✖	100EC 322 ✖	100ED 322 ✖	100EF 322 ✖	100EI 322 ✖	100EK 322 ✖
	3000 K	100EB 323 ✖	100EC 323 ✖	100ED 323 ✖	100EF 323 ✖	100EI 323 ✖	100EK 323 ✖
	4000 K	100EB 325 ✖	100EC 325 ✖	100ED 325 ✖	100EF 325 ✖	100EI 325 ✖	100EK 325 ✖

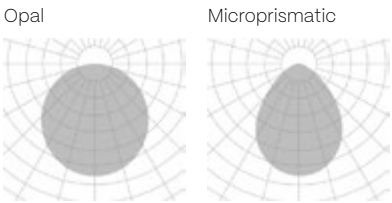

The data shown corresponds to raw values.

FINISH

- B · Black
- W · White
- S · Special color

ON DEMAND OPTIONS

 Special finishes

 Special color temperatures

 Number switches

 CRI 80

 Emergency lighting

 Motion detection

 Wireless control options

 Surface/Wall sfc. up light

 RGB

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed

- 6 · Trimless
- 7 · Wall Surface
- 9 · Trackline

FINISH

- B · Black
- W · White
- S · Special color


DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push


 Up light

 Down light


ALABAMA SLIGHT

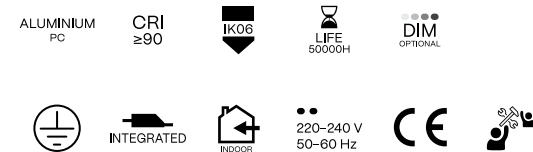


INSTALLATION

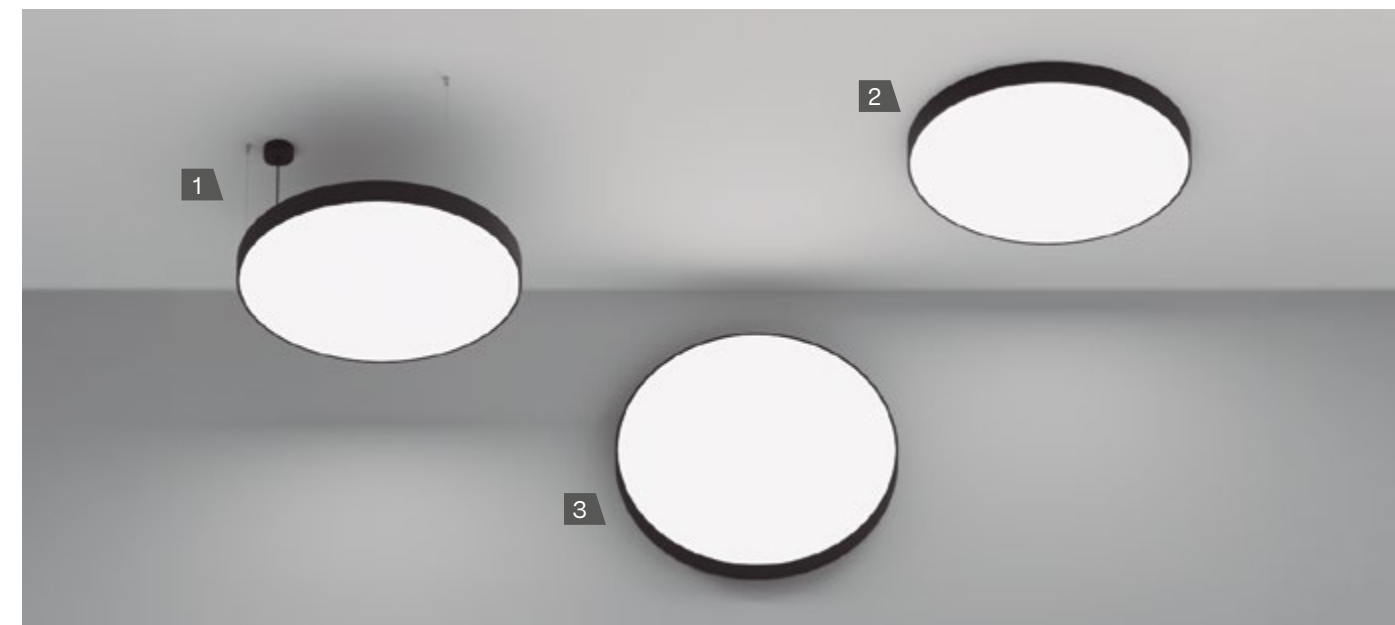


1. PENDANT – PENDANT UP LIGHT

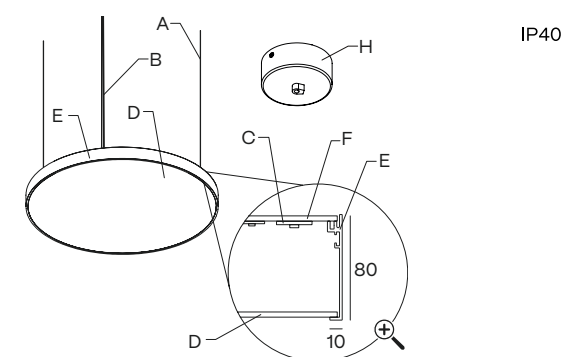

2. SURFACE

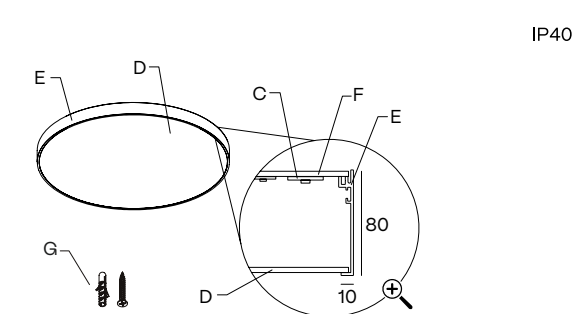

3. WALL SURFACE

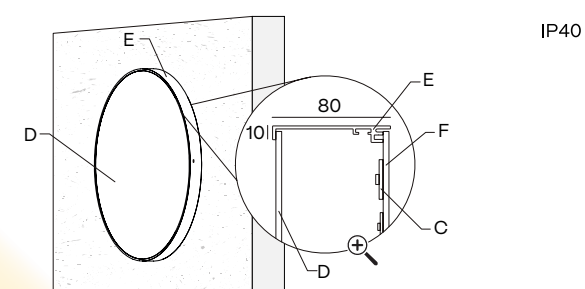

DIAMETERS mm.
350 · 450 · 650 · 950 · 1250

HEIGHT mm.
80

A – 3x aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser

E – Aluminium profile
F – Aluminium cover
G – Mounting kit
H – Included connection box

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø102	.35	CB10
	 Ø150	.45 .65	CB02
	 Ø310	.95 .125	CB05

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE
	 Ø102	600 mm	SC20.60
		800 mm	SC20.80
		1000 mm	SC20.100

Luminaire .95 and .125 require 3 rod suspensions.


CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø85 + CB10	.35	SC21
	 Ø125 + CB02	.45 .65	SC22
	 Ø215 + CB05	.95 .125	SC23

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA

TECHNICAL INFORMATION

POWER STANDARD

		Ø350	Ø450	Ø650	Ø950	Ø1250
	24 V	13 W 908 - 950 - 1020 lm	18 W 1287 - 1346 - 1445 lm	25 W 1816 - 1900 - 2040 lm	37 W 2724 - 2850 - 3060 lm	48 W 3556 - 3721 - 3995 lm
	700 mA	29 W 2963 - 3111 - 3267 lm	49 W 4938 - 5185 - 5444 lm	118 W 11851 - 12444 - 13066 lm	216 W 21728 - 22814 - 23955 lm	353 W 34567 - 36295 - 38110 lm
Opal	2700 K	102EC 112	102ED 112	102EF 112	102EI 112	102EK 112
	3000 K	102EC 113	102ED 113	102EF 113	102EI 113	102EK 113
	4000 K	102EC 115	102ED 115	102EF 115	102EI 115	102EK 115
Microprismatic	2700 K	102EC 122	102ED 122	102EF 122	102EI 122	102EK 122
	3000 K	102EC 123	102ED 123	102EF 123	102EI 123	102EK 123
	4000 K	102EC 125	102ED 125	102EF 125	102EI 125	102EK 125

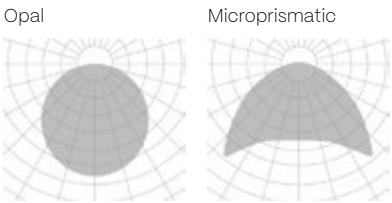

The data shown corresponds to raw values.

FINISH

B · Black
W · White
S · Special color

ON DEMAND OPTIONS

Special finishes

Number switches

Surface/Wall sfc. up light

Wireless control options

Emergency lighting

Motion detection

INSTALLATION

1 · Pendant
2 · Pendant up light
3 · Surface
7 · Wall Surface

FINISH


B · Black
W · White
S · Special color

DIMM OPTIONS


O · On-Off
D · Dali
P · Push
V · 1.10v

Up light
 Down light


ALABAMA SLIGHT SQ

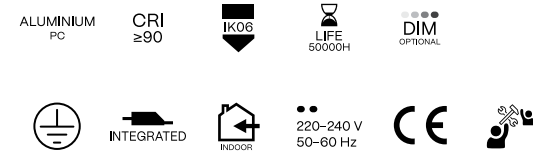


INSTALLATION

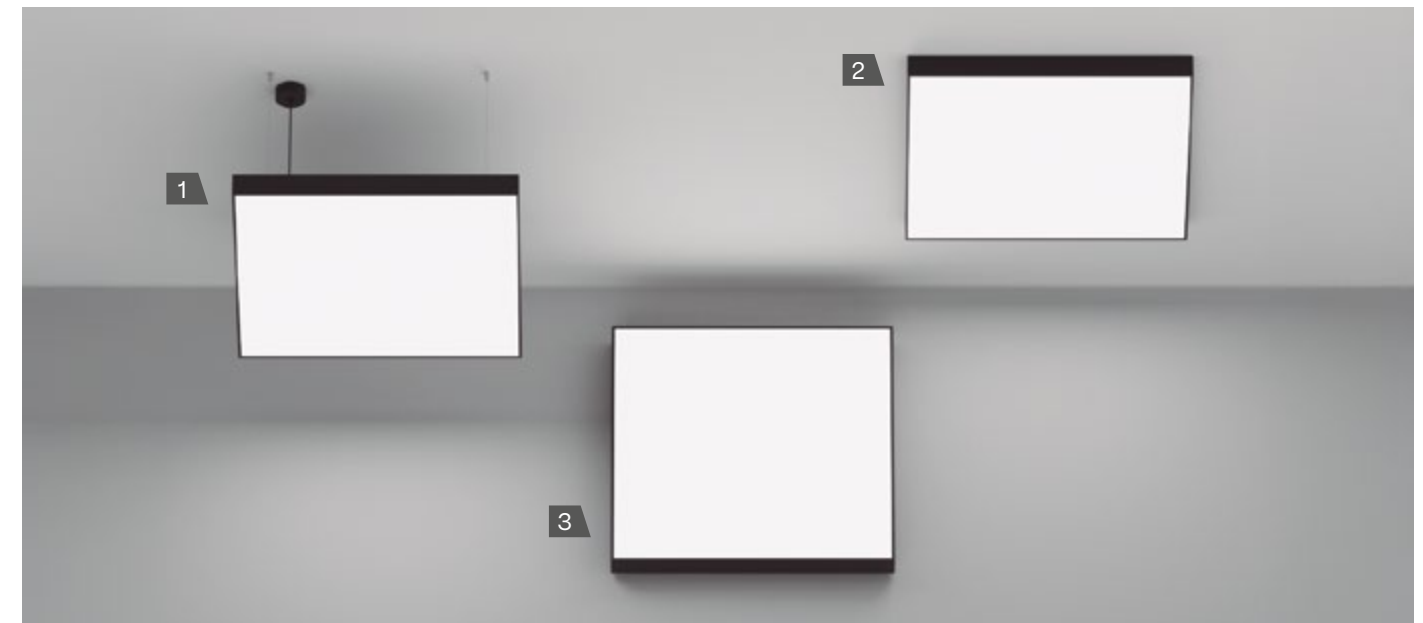


1. PENDANT – PENDANT UP LIGHT

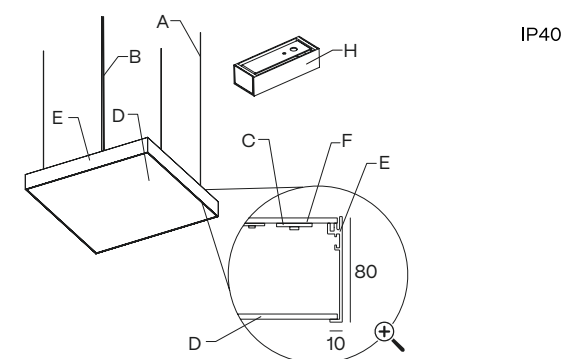

2. SURFACE

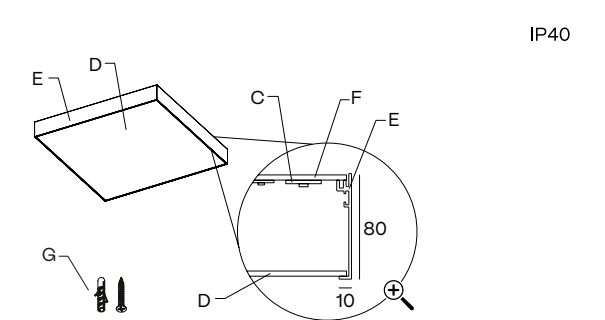

3. WALL SURFACE

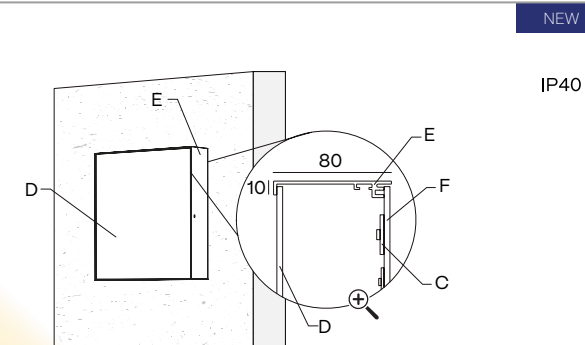

WIDTH x LENGTH mm.

350 x 350 · 450 x 450 · 650 x 650
950 x 950 · 1250 x 1250
300 x 650 · 300 x 950 · 300x1250

HEIGHT mm.

80

A – 3x aircraft cable (3 m)

B – Power cable

C – LED module

D – Diffuser

E – Aluminium profile



F – Aluminium cover

G – Mounting kit

H – Included connection box

COMPONENTS

PENDANT

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE	SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
		600 mm	SC21.60			
		800 mm	SC21.80			
		1000 mm	SC21.100			
				SC05.SA	SC07.SA	SC10.SA

Luminaire .95 and .125 require 3 rod suspensions.


TECHNICAL INFORMATION

POWER STANDARD


						
		350 x 350	450 x 450	650 x 650	950 x 950	1250 x 1250
	24 V	13 W 908 – 950 – 1020 lm	18 W 1287 – 1346 – 1445 lm	25 W 1816 – 1900 – 2040 lm	37 W 2724 – 2850 – 3060 lm	48 W 3556 – 3721 – 3995 lm
	 700 mA	29 W 2706 – 3111 – 3267 lm	59 W 5926 – 6222 – 6533 lm	118 W 11851 – 12444 – 13066 lm	235 W 23703 – 24888 – 26132 lm	392 W 39505 – 41480 – 43554 lm
Opal	2700 K	103EC 112	103ED 112	103EF 112	103EI 112	103EK 112
	3000 K	103EC 113	103ED 113	103EF 113	103EI 113	103EK 113
	4000 K	103EC 115	103ED 115	103EF 115	103EI 115	103EK 115
Microprismatic	2700 K	103EC 122	103ED 122	103EF 122	103EI 122	103EK 122
	3000 K	103EC 123	103ED 123	103EF 123	103EI 123	103EK 123
	4000 K	103EC 125	103ED 125	103EF 125	103EI 125	103EK 125

				
		300 x 650	300 x 950	300 x 1250
	24 V	25 W 1816 – 1900 – 2040 lm	37 W 2724 – 2850 – 2142 lm	48 W 3556 – 3721 – 3995 lm
	 700 mA	39 W 3950 – 4148 – 4355 lm	59 W 5926 – 6222 – 6533 lm	78 W 7901 – 8296 – 8711 lm
Opal	2700 K	103EE 112	103EH 112	103EJ 112
	3000 K	103EE 113	103EH 113	103EJ 113
	4000 K	103EE 115	103EH 115	103EJ 115
Microprismatic	2700 K	103EE 122	103EH 122	103EJ 122
	3000 K	103EE 123	103EH 123	103EJ 123
	4000 K	103EE 125	103EH 125	103EJ 125

Opal



Microprismatic




The data shown corresponds to raw values.


FINISH	ON DEMAND OPTIONS			
B · Black W · White S · Special color	 Special finishes	 Special color temperatures	 Number switches	
	 Emergency lighting	 Motion detection	 Wireless control options	 Surface/Wall sfc. up light

INSTALLATION	FINISH	DIMM OPTIONS	
1 · Pendant 2 · Pendant up light 3 · Surface 7 · Wall Surface	B · Black W · White S · Special color	O · On-Off D · Dali P · Push V · 1.10v	 Up light  Down light


ALABAMA SLIM

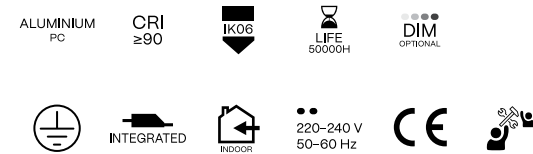


INSTALLATION

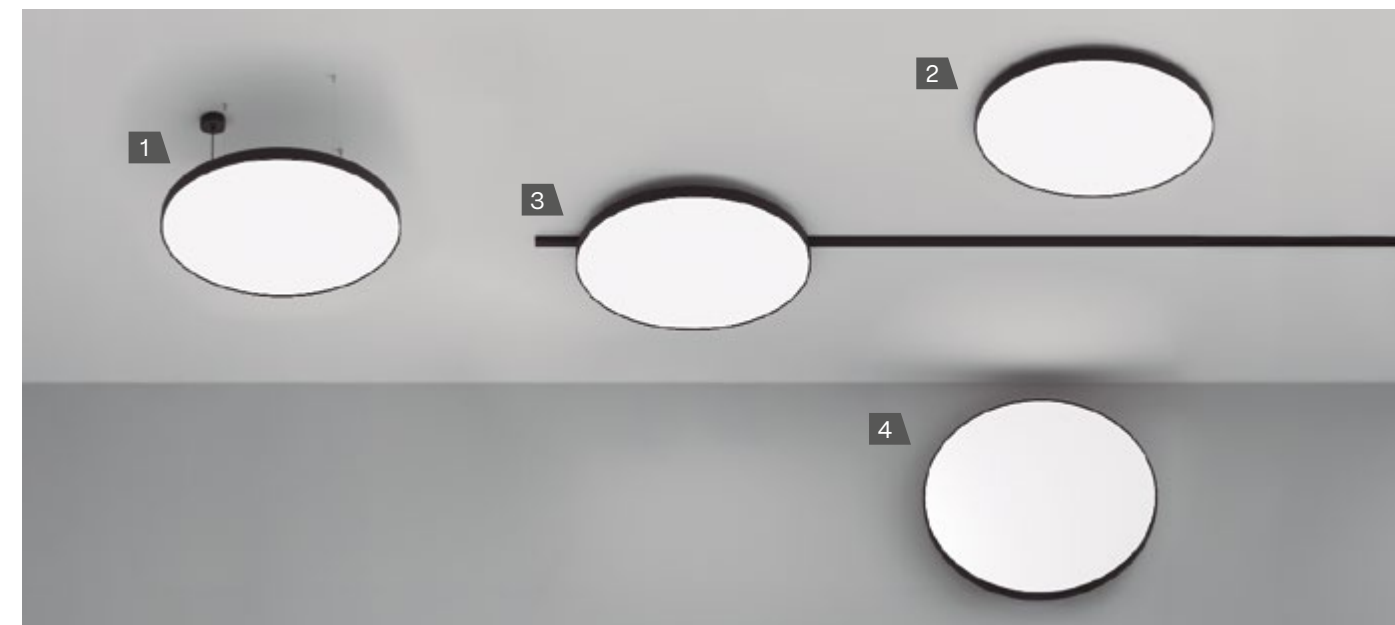


1. PENDANT – PENDANT UP LIGHT

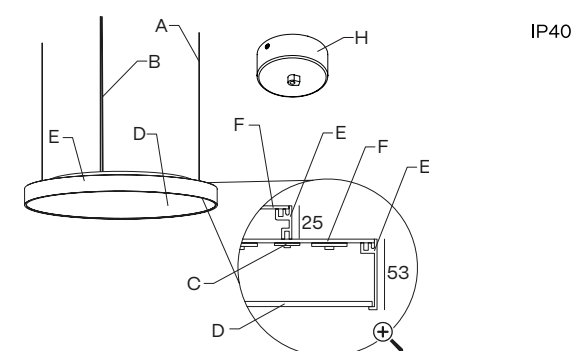


2. SURFACE

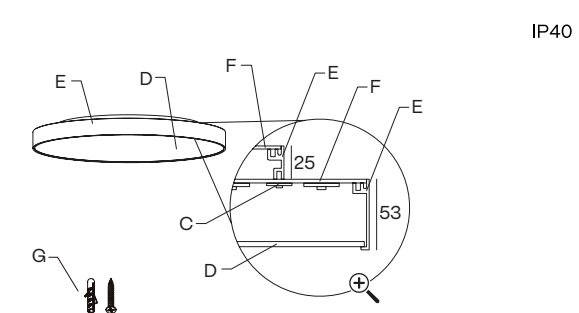

3. TRACKLIGHT Ø250 mm to Ø650 mm

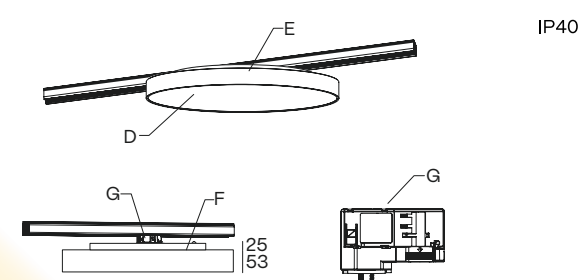

4. WALL SURFACE

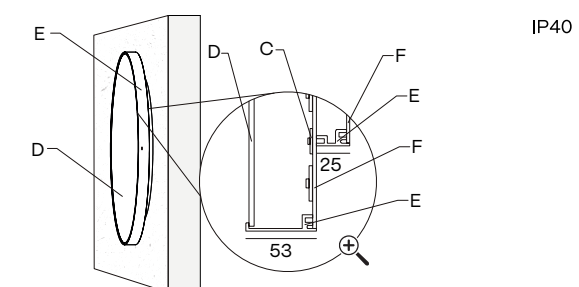

DIAMETERS mm.
250 · 350 · 450 · 650 · 950 · 1250


HEIGHT mm.
53 + 25

A – 3× aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser




E – Aluminium profile
F – Aluminium cover
G – Mounting kit
H – Included connection box




COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.25 .35	CB10 
	 26 Ø150	.45 .65	CB02 
	 47 Ø310	.95 .125	CB05 

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE
	 40 Ø102	600 mm	SC20.60 
		800 mm	SC20.80 
		1000 mm	SC20.100 

CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 085 +  CB10	.25 .35	SC21 
	 0125 +  CB02	.45 .65	SC22 
	 0215 +  CB05	.95 .125	SC23 

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA


TECHNICAL INFORMATION

POWER STANDARD


		 Ø250	 Ø350	 Ø450
	24 V	10 W 681 – 713 – 765 lm	13 W 908 – 950 – 1020 lm	18 W 1287 – 1346 – 1445 lm
		250 mA	12 W 1385 – 1400 – 1425 lm	19 W 2350 – 2392 – 2697 lm
Opal	2700 K	104EB   112 	104EC   112 	104ED   112 
	3000 K	104EB   113 	104EC   113 	104ED   113 
	4000 K	104EB   115 	104EC   115 	104ED   115 
Microprismatic	2700 K	104EB   122 	104EC   122 	104ED   122 
	3000 K	104EB   123 	104EC   123 	104ED   123 
	4000 K	104EB   125 	104EC   125 	104ED   125 

		 Ø650	 Ø950	 Ø1250
	24 V	25 W 1816 – 1900 – 2040 lm	37 W 2724 – 2850 – 3060 lm	25 W 3556 – 3721 – 3995 lm
		250 mA	87 W 10572 – 10704 – 12484 lm	177 W 21598 – 21976 – 25816 lm
Opal	2700 K	104EF   112 	104EI   112 	104EK   112 
	3000 K	104EF   113 	104EI   113 	104EK   113 
	4000 K	104EF   115 	104EI   115 	104EK   115 
Microprismatic	2700 K	104EF   122 	104EI   122 	104EK   122 
	3000 K	104EF   123 	104EI   123 	104EK   123 
	4000 K	104EF   125 	104EI   125 	104EK   125 

Opal



Microprismatic



The data shown corresponds to raw values.

FINISH

- B · Black
- W · White
- S · Special color



ON DEMAND OPTIONS



Special finishes



Number switches



Surface/Wall sfc. up light



Emergency lighting



Motion detection



Wireless control options

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 7 · Wall Surface
- 9 · Trackline

FINISH

- B · Black
- W · White
- S · Special color


DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push


Up light

Down light


ALABAMA SUPER SLIM

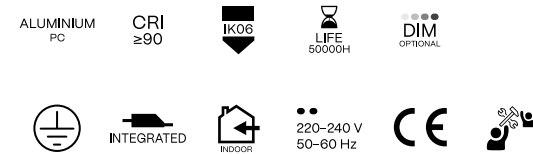


INSTALLATION

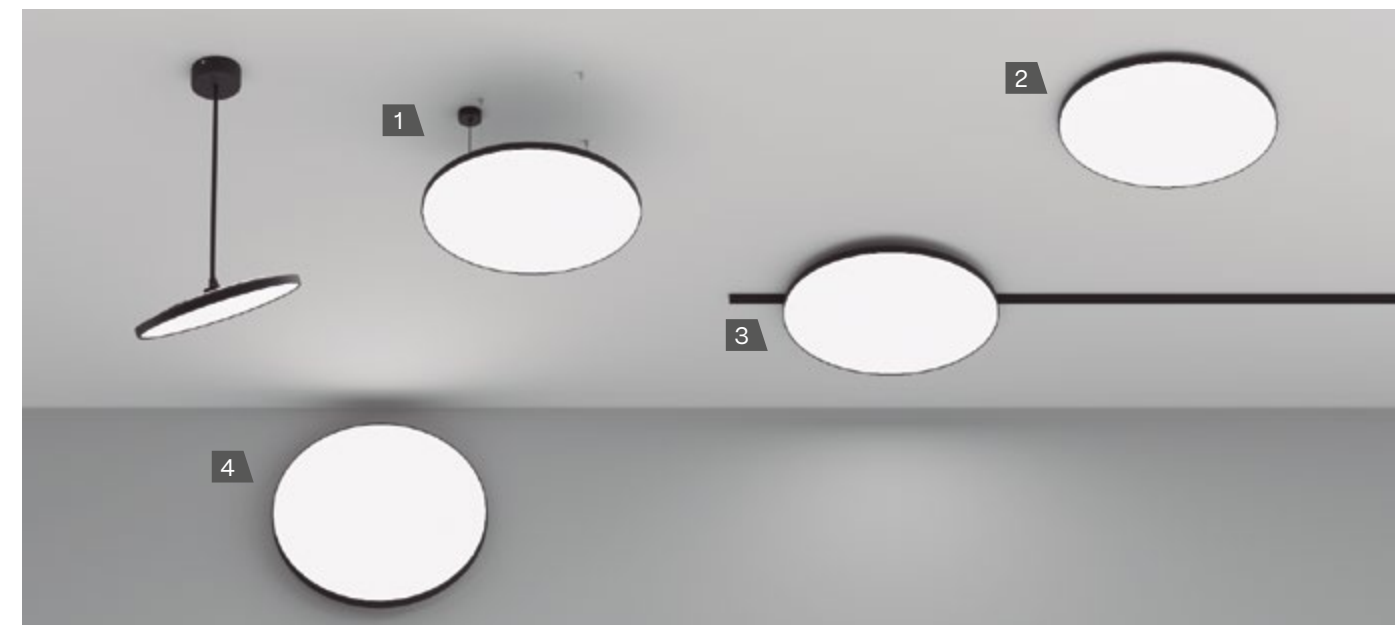


1. PENDANT – PENDANT UP LIGHT

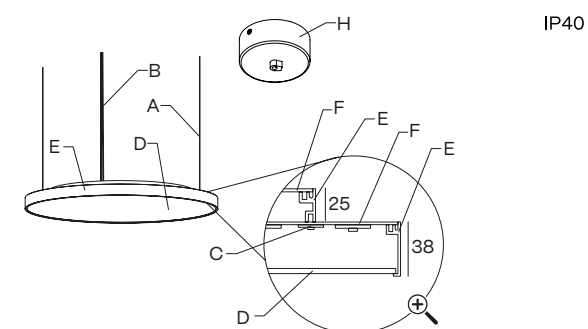


2. SURFACE

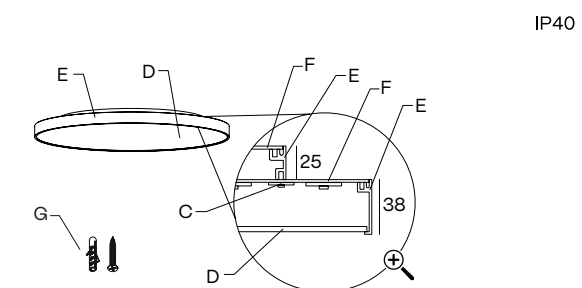

3. TRACKLIGHT Ø250 mm to Ø650 mm

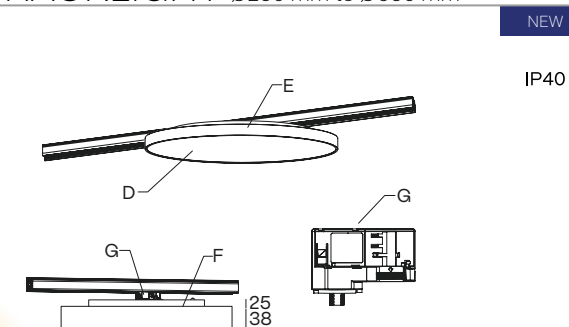

4. WALL SURFACE

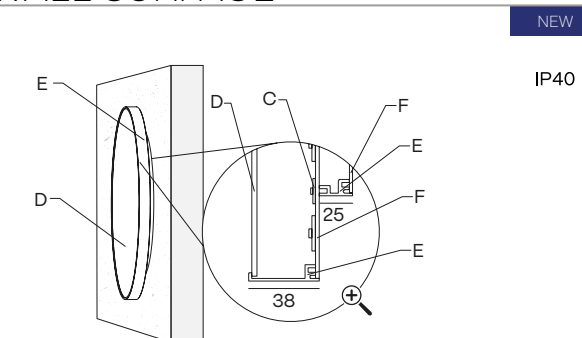

DIAMETERS mm.

250 · 350 · 450 · 650 · 950 · 1250

HEIGHT mm.

38 + 25

A – 3× aircraft cable (3 m)

B – Power cable

C – LED module

D – Diffuser

E – Aluminium profile


F – Aluminium cover




G – Mounting kit

H – Included connection box

COMPONENTS




PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	 40 Ø102	.25 .35	CB10 
	 26 Ø150	.45 .65	CB02 
	 47 Ø310	.95 .125	CB05 



CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 +  Ø85 CB10	.25 .35	SC21 
	 +  Ø125 CB02	.45 .65	SC22 
	 +  Ø215 CB05	.95 .125	SC23 


CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE
	 40 Ø102	600 mm	SC20.60 
		800 mm	SC20.80 
		1000 mm	SC20.100 

Luminaire .95 and .125 require 3 rod suspensions.

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
 5m	 7m	 10m
SC05.SA	SC07.SA	SC10.SA

TILT ACCESSORY

ALABAMA SUPER SLIM TILT ROD	CONNECTION BOX	DIMENSION	REFERENCE
 45°	 40 Ø102	.35	A106HB1XXX 
		.45	A122HE1XXX 

EXTRA ALABAMA SUPER SLIM TILT ROD	DIMENSION	REFERENCE
	800 mm	SC20.80 
	1000 mm	SC20.100 

-  **FINISH**
- B** · Black
 - W** · White
 - S** · Special color

 ON DEMAND OPTIONS

-  Special finishes
-  Number switches
-  Surface/Wall sfc. up light
-  Emergency lighting
-  Motion detection
-  Wireless control options


TECHNICAL INFORMATION

POWER STANDARD


		 Ø250	 Ø350	 Ø450
	24 V	10 W 681 – 713 – 765 lm	13 W 908 – 950 – 1020 lm	18 W 1287 – 1346 – 1445 lm
	250 mA	12 W 1385 – 1400 – 1425 lm	19 W 2350 – 2392 – 2697 lm	38 W 4700 – 4784 – 5394 lm
	Opal	2700 K 106EB   112 	2700 K 106EC   112 	2700 K 106ED   112 
	2500 K	106EB   113 	2500 K 106EC   113 	2500 K 106ED   113 
	4000 K	106EB   115 	4000 K 106EC   115 	4000 K 106ED   115 
	2700 K	106EB   122 	2700 K 106EC   122 	2700 K 106ED   122 
	3000 K	106EB   123 	3000 K 106EC   123 	3000 K 106ED   123 
	4000 K	106EB   125 	4000 K 106EC   125 	4000 K 106ED   125 

		 Ø650	 Ø950	 Ø1250
	24 V	25 W 1816 – 1900 – 2040 lm	37 W 2724 – 2850 – 3060 lm	48 W 3556 – 3721 – 3995 lm
	250 mA	87 W 10572 – 10704 – 12484 lm	177 W 21598 – 21976 – 25816 lm	350 W 36308 – 36848 – 43124 lm
	Opal	2700 K 106EF   112 	2700 K 106EI   112 	2700 K 106EK   112 
	2500 K	106EF   113 	2500 K 106EI   113 	2500 K 106EK   113 
	4000 K	106EF   115 	4000 K 106EI   115 	4000 K 106EK   115 
	2700 K	106EF   122 	2700 K 106EI   122 	2700 K 106EK   122 
	3000 K	106EF   123 	3000 K 106EI   123 	3000 K 106EK   123 
	4000 K	106EF   125 	4000 K 106EI   125 	4000 K 106EK   125 

Opal



Microprismatic



The data shown corresponds to raw values.

 INSTALLATION

- 1** · Pendant
- 2** · Pendant up light
- 3** · Surface
- 7** · Wall Surface
- 9** · Trackline

 FINISH


- B** · Black
- W** · White
- S** · Special color

 DIMM OPTIONS

- O** · On-Off
- D** · Dali
- P** · Push

-  Up light
-  Down light

OHIO FAMILY

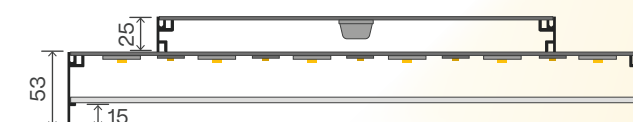

OHIO | SQ
REF. 170 | 171
PAG. 146 | 150

OHIO

ALUMINIUM
PC

CRI
≥90


IK06

LIFE
50000h


DIM
OPTIONAL




INSTALLATION

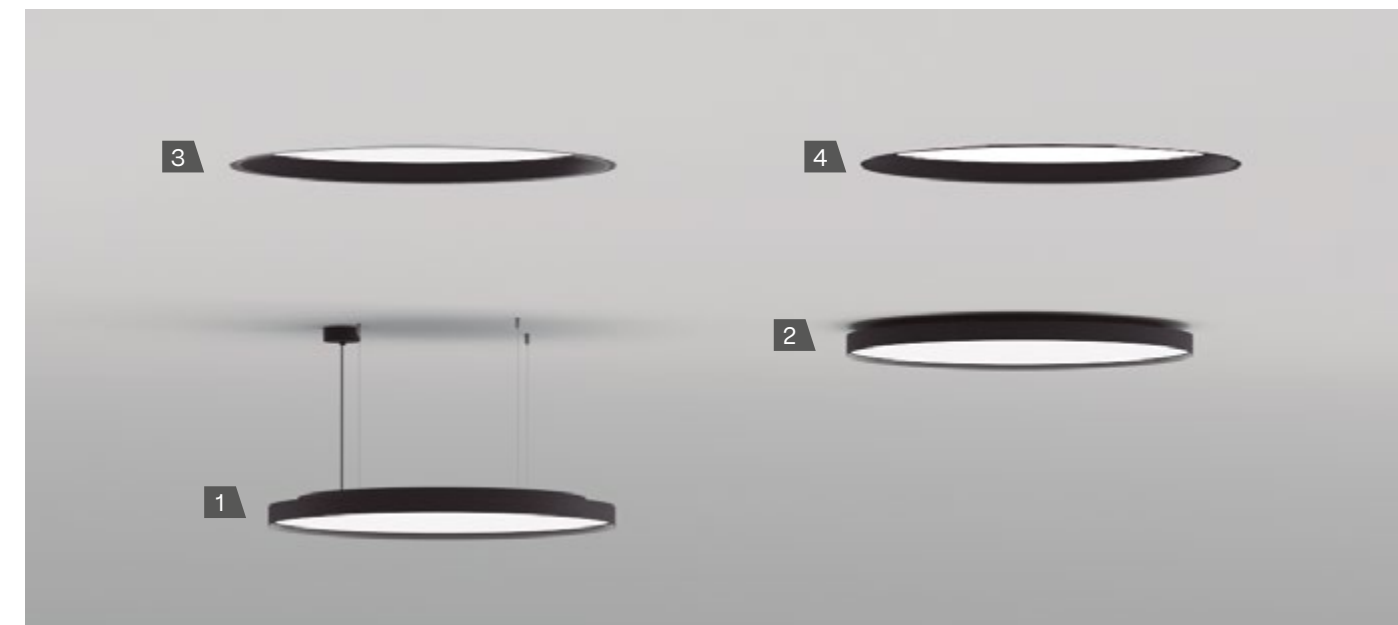


1. PENDANT – PENDANT UP LIGHT

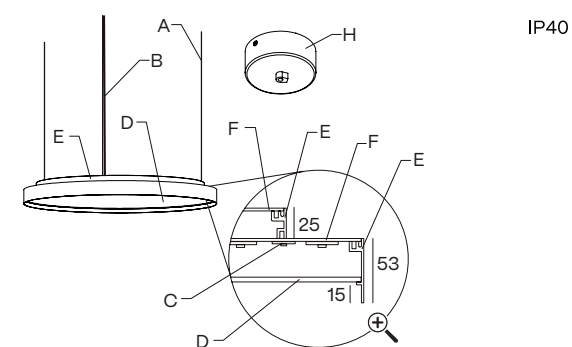


2. SURFACE

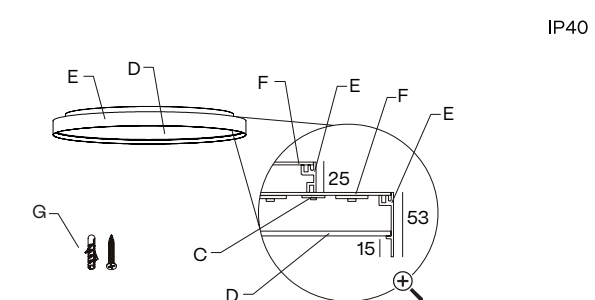

3. RECESSED WITH FRAME

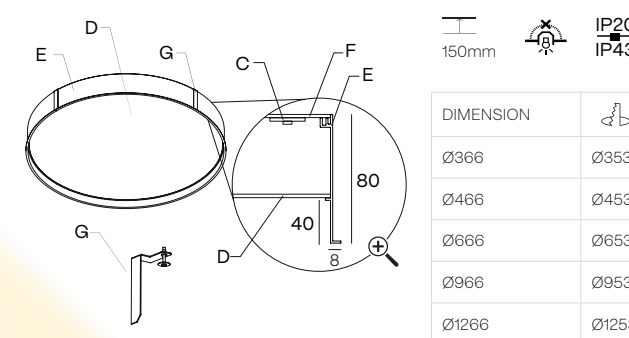

4. TRIMLESS

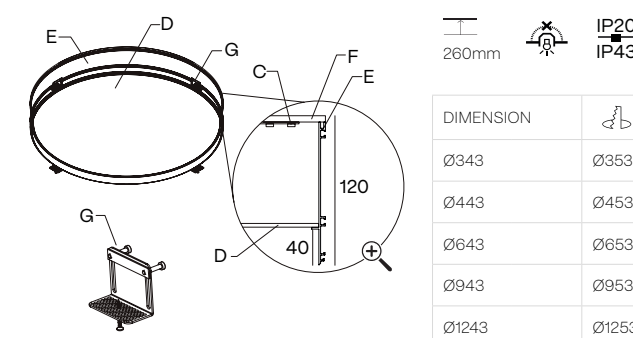

DIAMETERS mm.
350 · 450 · 650 · 950 · 1250

HEIGHT mm.
53 · 80 · 120

A – 3x aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser

E – Aluminium profile
F – Aluminium cover
G – Mounting kit
H – Included connection box

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material

COMPONENTS


PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE
	40 Ø102	.25 .35	CB10
	26 Ø150	.45 .65	CB02
	47 Ø310	.95 .125	CB05

CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	Ø85 + CB10	.25 .35	SC21
	Ø125 + CB02	.45 .65	SC22
	Ø215 + CB05	.95 .125	SC23

CENTRAL ROD SUSPENSION	CONNECTION BOX	DIMENSIONS	REFERENCE
		600 mm	SC20.60
		800 mm	SC20.80
		1000 mm	SC20.100

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
SC05.SA	SC07.SA	SC10.SA

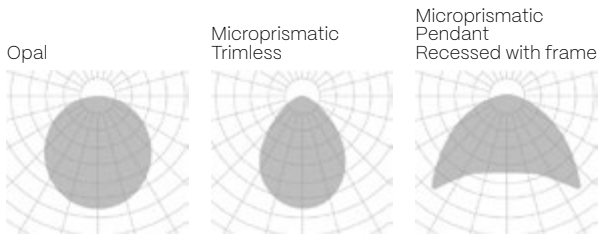

- FINISH**

 - B · Black
 - W · White
 - S · Special color
- ON DEMAND OPTIONS**

Special finishes

Special color temperatures

Number switches

Emergency lighting

Motion detection

Wireless control options

Surface/Wall sfc. up light

TECHNICAL INFORMATION

POWER STANDARD for pendant and surface

		Ø350	Ø450	Ø650	Ø950	Ø1250
	24 V	13 W 908 – 950 – 1020 lm	18 W 1287 – 1346 – 1445 lm	25 W 1816 – 1900 – 2040 lm	37 W 2724 – 2850 – 3060 lm	48 W 3556 – 3721 – 3995 lm
	250 mA	19 W 2350 – 2392 – 2697 lm	38 W 4700 – 4784 – 5394 lm	87 W 10572 – 10704 – 12484 lm	177 W 21598 – 21976 – 25816 lm	350 W 36308 – 36848 – 43124 lm
	Opal	2700 K 170EC 112	2700 K 170ED 112	2700 K 170EF 112	2700 K 170EI 112	2700 K 170EK 112
		3000 K 170EC 113	3000 K 170ED 113	3000 K 170EF 113	3000 K 170EI 113	3000 K 170EK 113
		4000 K 170EC 115	4000 K 170ED 115	4000 K 170EF 115	4000 K 170EI 115	4000 K 170EK 115
	Microprismatic	2700 K 170EC 122	2700 K 170ED 122	2700 K 170EF 122	2700 K 170EI 122	2700 K 170EK 122
		3000 K 170EC 123	3000 K 170ED 123	3000 K 170EF 123	3000 K 170EI 123	3000 K 170EK 123
		4000 K 170EC 125	4000 K 170ED 125	4000 K 170EF 125	4000 K 170EI 125	4000 K 170EK 125

POWER STANDARD for recessed with frame

		Ø350	Ø450	Ø650	Ø950	Ø1250
	700 mA	29 W 2963 – 3111 – 3267 lm	49 W 4938 – 5185 – 5444 lm	118 W 11851 – 12444 – 13066 lm	216 W 21728 – 22814 – 23955 lm	353 W 34567 – 36295 – 38110 lm
	Opal	2700 K 170EC5 112	2700 K 170ED5 112	2700 K 170EF5 112	2700 K 170EI5 112	2700 K 170EK5 112
		3000 K 170EC5 113	3000 K 170ED5 113	3000 K 170EF5 113	3000 K 170EI5 113	3000 K 170EK5 113
		4000 K 170EC5 115	4000 K 170ED5 115	4000 K 170EF5 115	4000 K 170EI5 115	4000 K 170EK5 115
	Microprismatic	2700 K 170EC5 122	2700 K 170ED5 122	2700 K 170EF5 122	2700 K 170EI5 122	2700 K 170EK5 122
		3000 K 170EC5 123	3000 K 170ED5 123	3000 K 170EF5 123	3000 K 170EI5 123	3000 K 170EK5 123
		4000 K 170EC5 125	4000 K 170ED5 125	4000 K 170EF5 125	4000 K 170EI5 125	4000 K 170EK5 125

POWER STANDARD for trimless

		Ø350	Ø450	Ø650	Ø950	Ø1250
	500 mA	17 W 2454 – 2907 – 3129 lm	33 W 4908 – 5814 – 6258 lm	67 W 9816 – 11628 – 12516 lm	123 W 17966 – 21318 – 22946 lm	201 W 29448 – 34884 – 37548 lm
	Opal	2700 K 170EC6 112	2700 K 170ED6 112	2700 K 170EF6 112	2700 K 170EI6 112	2700 K 170EK6 112
		3000 K 170EC6 113	3000 K 170ED6 113	3000 K 170EF6 113	3000 K 170EI6 113	3000 K 170EK6 113
		4000 K 170EC6 115	4000 K 170ED6 115	4000 K 170EF6 115	4000 K 170EI6 115	4000 K 170EK6 115
	Microprismatic	2700 K 170EC6 122	2700 K 170ED6 122	2700 K 170EF6 122	2700 K 170EI6 122	2700 K 170EK6 122
		3000 K 170EC6 123	3000 K 170ED6 123	3000 K 170EF6 123	3000 K 170EI6 123	3000 K 170EK6 123
		4000 K 170EC6 125	4000 K 170ED6 125	4000 K 170EF6 125	4000 K 170EI6 125	4000 K 170EK6 125

The data shown corresponds to raw values.

- INSTALLATION**

 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 5 · Recessed with frame
 - 6 · Trimless
- FINISH**

 - B · Black
 - W · White
- DIMM OPTIONS**

 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- Up light

Down light

OHIO SQ

ALUMINIUM
PC

CRI
≥90

IK06

LIFE
50000h

DIM
OPTIONAL




INTEGRATED




220-240 V
50-60 Hz




INSTALLATION

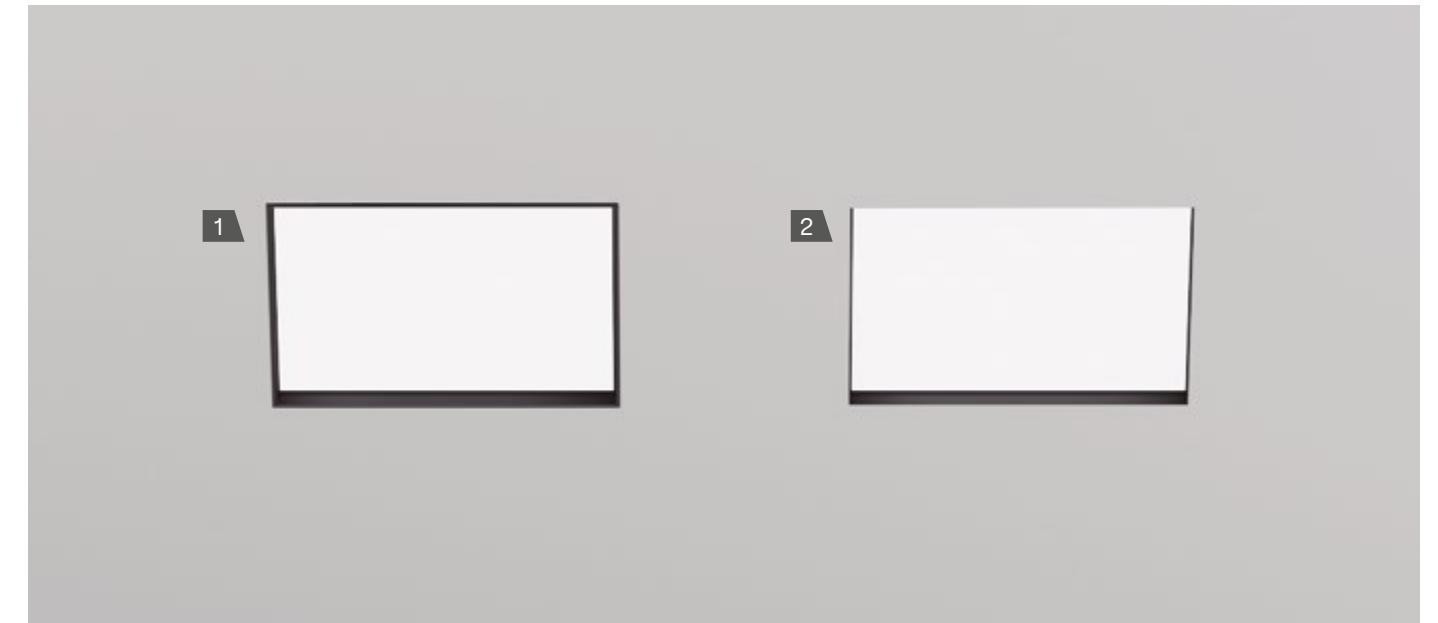

1. RECESSED WITH FRAME

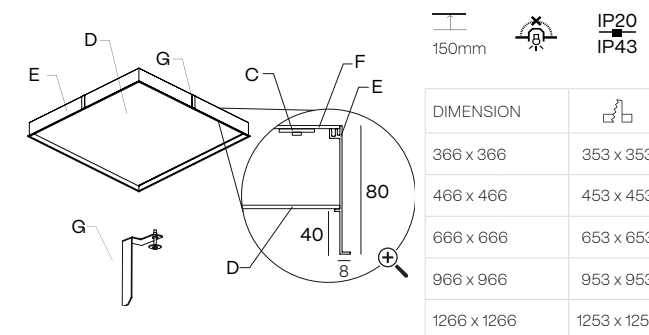

2. TRIMLESS

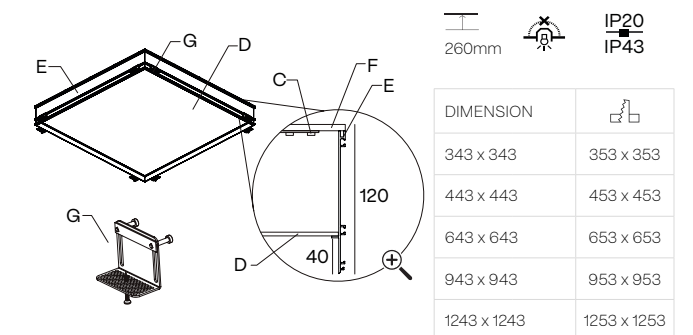

WIDTH x LENGTH mm.
343 x 343 · 443 x 443 · 643 x 643
943 x 943 · 1243 x 1243






HEIGHT mm.
80 · 120

C – LED module
D – Diffuser
E – Aluminium profile
F – Aluminium cover
G – Mounting kit





Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material


TECHNICAL INFORMATION

POWER STANDARD for recessed with frame

						
		343 x 343	443 x 443	643 x 643	943 x 943	1243 x 1243
Opal	700 mA	29 W 2963 - 3111 - 3267 lm	59 W 5926 - 6222 - 6533 lm	118 W 11851 - 12444 - 13066 lm	235 W 23703 - 24888 - 26132 lm	392 W 39505 - 41480 - 43554 lm
	2700 K	171EC5 112	171ED5 112	171EF5 112	171EI5 112	171EK5 112
	3000 K	171EC5 113	171ED5 113	171EF5 113	171EI5 113	171EK5 113
	4000 K	171EC5 115	171ED5 115	171EF5 115	171EI5 115	171EK5 115
Microprismatic	2700 K	171EC5 122	171ED5 122	171EF5 122	171EI5 122	171EK5 122
	3000 K	171EC5 123	171ED5 123	171EF5 123	171EI5 123	171EK5 123
	4000 K	171EC5 125	171ED5 125	171EF5 125	171EI5 125	171EK5 125

POWER STANDARD for trimless

						
		343 x 343	443 x 443	643 x 643	943 x 943	1243 x 1243
Opal	500 mA	29 W 2706 - 3111 - 3000 lm	59 W 5926 - 6222 - 6533 lm	118 W 11851 - 12444 - 13066 lm	235 W 23703 - 24888 - 26132 lm	392 W 39505 - 41480 - 43554 lm
	2700 K	171EC6 112	171ED6 112	171EF6 112	171EI6 112	171EK6 112
	3000 K	171EC6 113	171ED6 113	171EF6 113	171EI6 113	171EK6 113
	4000 K	171EC6 115	171ED6 115	171EF6 115	171EI6 115	171EK6 115
Microprismatic	2700 K	171EC6 122	171ED6 122	171EF6 122	171EI6 122	171EK6 122
	3000 K	171EC6 123	171ED6 123	171EF6 123	171EI6 123	171EK6 123
	4000 K	171EC6 125	171ED6 125	171EF6 125	171EI6 125	171EK6 125

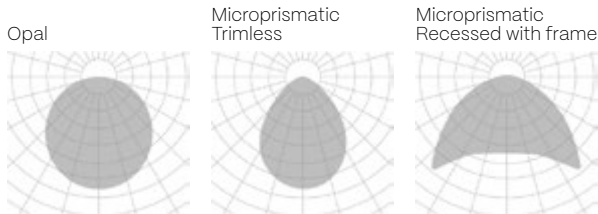

The data shown corresponds to raw values.

- ✦ INSTALLATION**

 - 5 · Recessed with frame
 - 6 · Trimless
- FINISH**

 - B · Black
 - W · White
- ✦ DIMM OPTIONS**


 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- 🔌 ON DEMAND OPTIONS**

 - Special finishes
 - Emergency lighting
 - Special color temperatures
 - Motion detection
 - Number switches
 - Wireless control options
- ☑ Down light






ALARIK SLIM LUMINAIRE

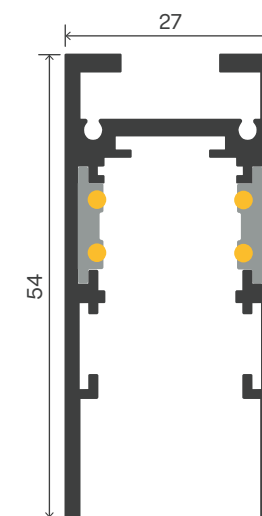

ALARIK SLIM LUMINAIRE
REF. 175
PAG. 156

ALARIK SLIM LUMINAIRE


NEW

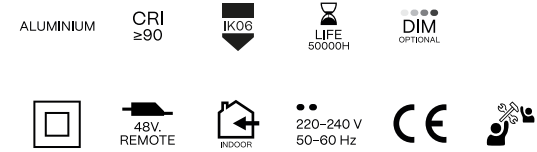

INSTALLATION




1. PENDANT

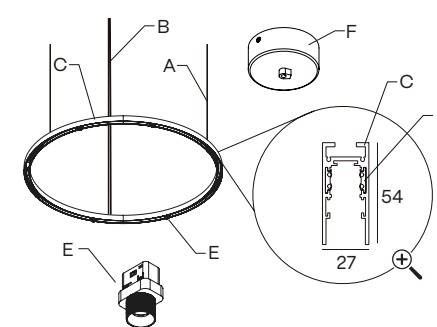

IP20

2. SURFACE

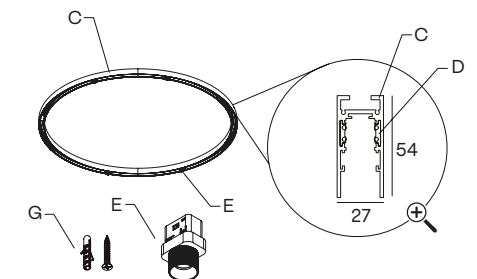

IP20

DIAMETERS mm.
650 · 950 · 1250

HEIGHT mm.
54

- A – 3x aircraft cable (3 m)
- B – Power cable
- C – Aluminium Profile
- D – Copper conductors
- E – Dot
- F – Included connection box

COMPONENTS

PENDANT

CABLE CONCENTRATOR	CONNECTION BOX	FOR MODEL	REFERENCE	CABLE CONCENTRATOR KIT	CONNECTION BOX	FOR MODEL	REFERENCE
	 Ø102 40	.35	CB10		 Ø85 40	.35	SC21
	 Ø150 26	.45 .65	CB02		 Ø125 45	.45 .65	SC22
	 Ø310 47	.95 .125 .150	CB05		 Ø215 95	.95 .125 .150	SC23

SUSPENSION KIT 5m	SUSPENSION KIT 7m	SUSPENSION KIT 10m
SC05.SA	SC07.SA	SC10.SA

GENERAL COMPONENTS

DALI 48V TRANSFORMER		48V TRANSFORMER	
35 W	DR48.00.DA	75 W	DR48.01
60 W	DR48.01.DA	120 W	DR48.02
100 W	DR48.02.DA	200 W	DR48.03
200 W	DR48.03.DA		

PENDANT COMPONENTS

SUSPENSION KIT	DRIVER BOX			CONNECTION BOX
	 Ø66 215	 Ø66 380	 80 320 50	 45 120
ACC20224.SC	CB08.22	CB08.38	CB06.32	CB09.12


FINISH	ON DEMAND OPTIONS
B · Black	Special Finishes
W · White	Custom Dimensions
S · Special color	

TECHNICAL INFORMATION

 Int. Ø650 Ext. Ø678 175EF	 Int. Ø950 Ext. Ø978 175EI	 Int. Ø1250 Ext. Ø1278 225EK
000X	000X	000X


POWER STANDARD

IP20			
	48 VdC	2 W 130 – 145 – 161 lm	
20°	2700 K	231EB9B132	
	3000 K	231EB9B133	
	4000 K	231EB9B135	



The data shown corresponds to raw values.

INSTALLATION	FINISH	DIMM OPTIONS	Down light
1 · Pendant	B · Black	O · On-Off	
3 · Surface	W · White	D · Dali	
	S · Special color		

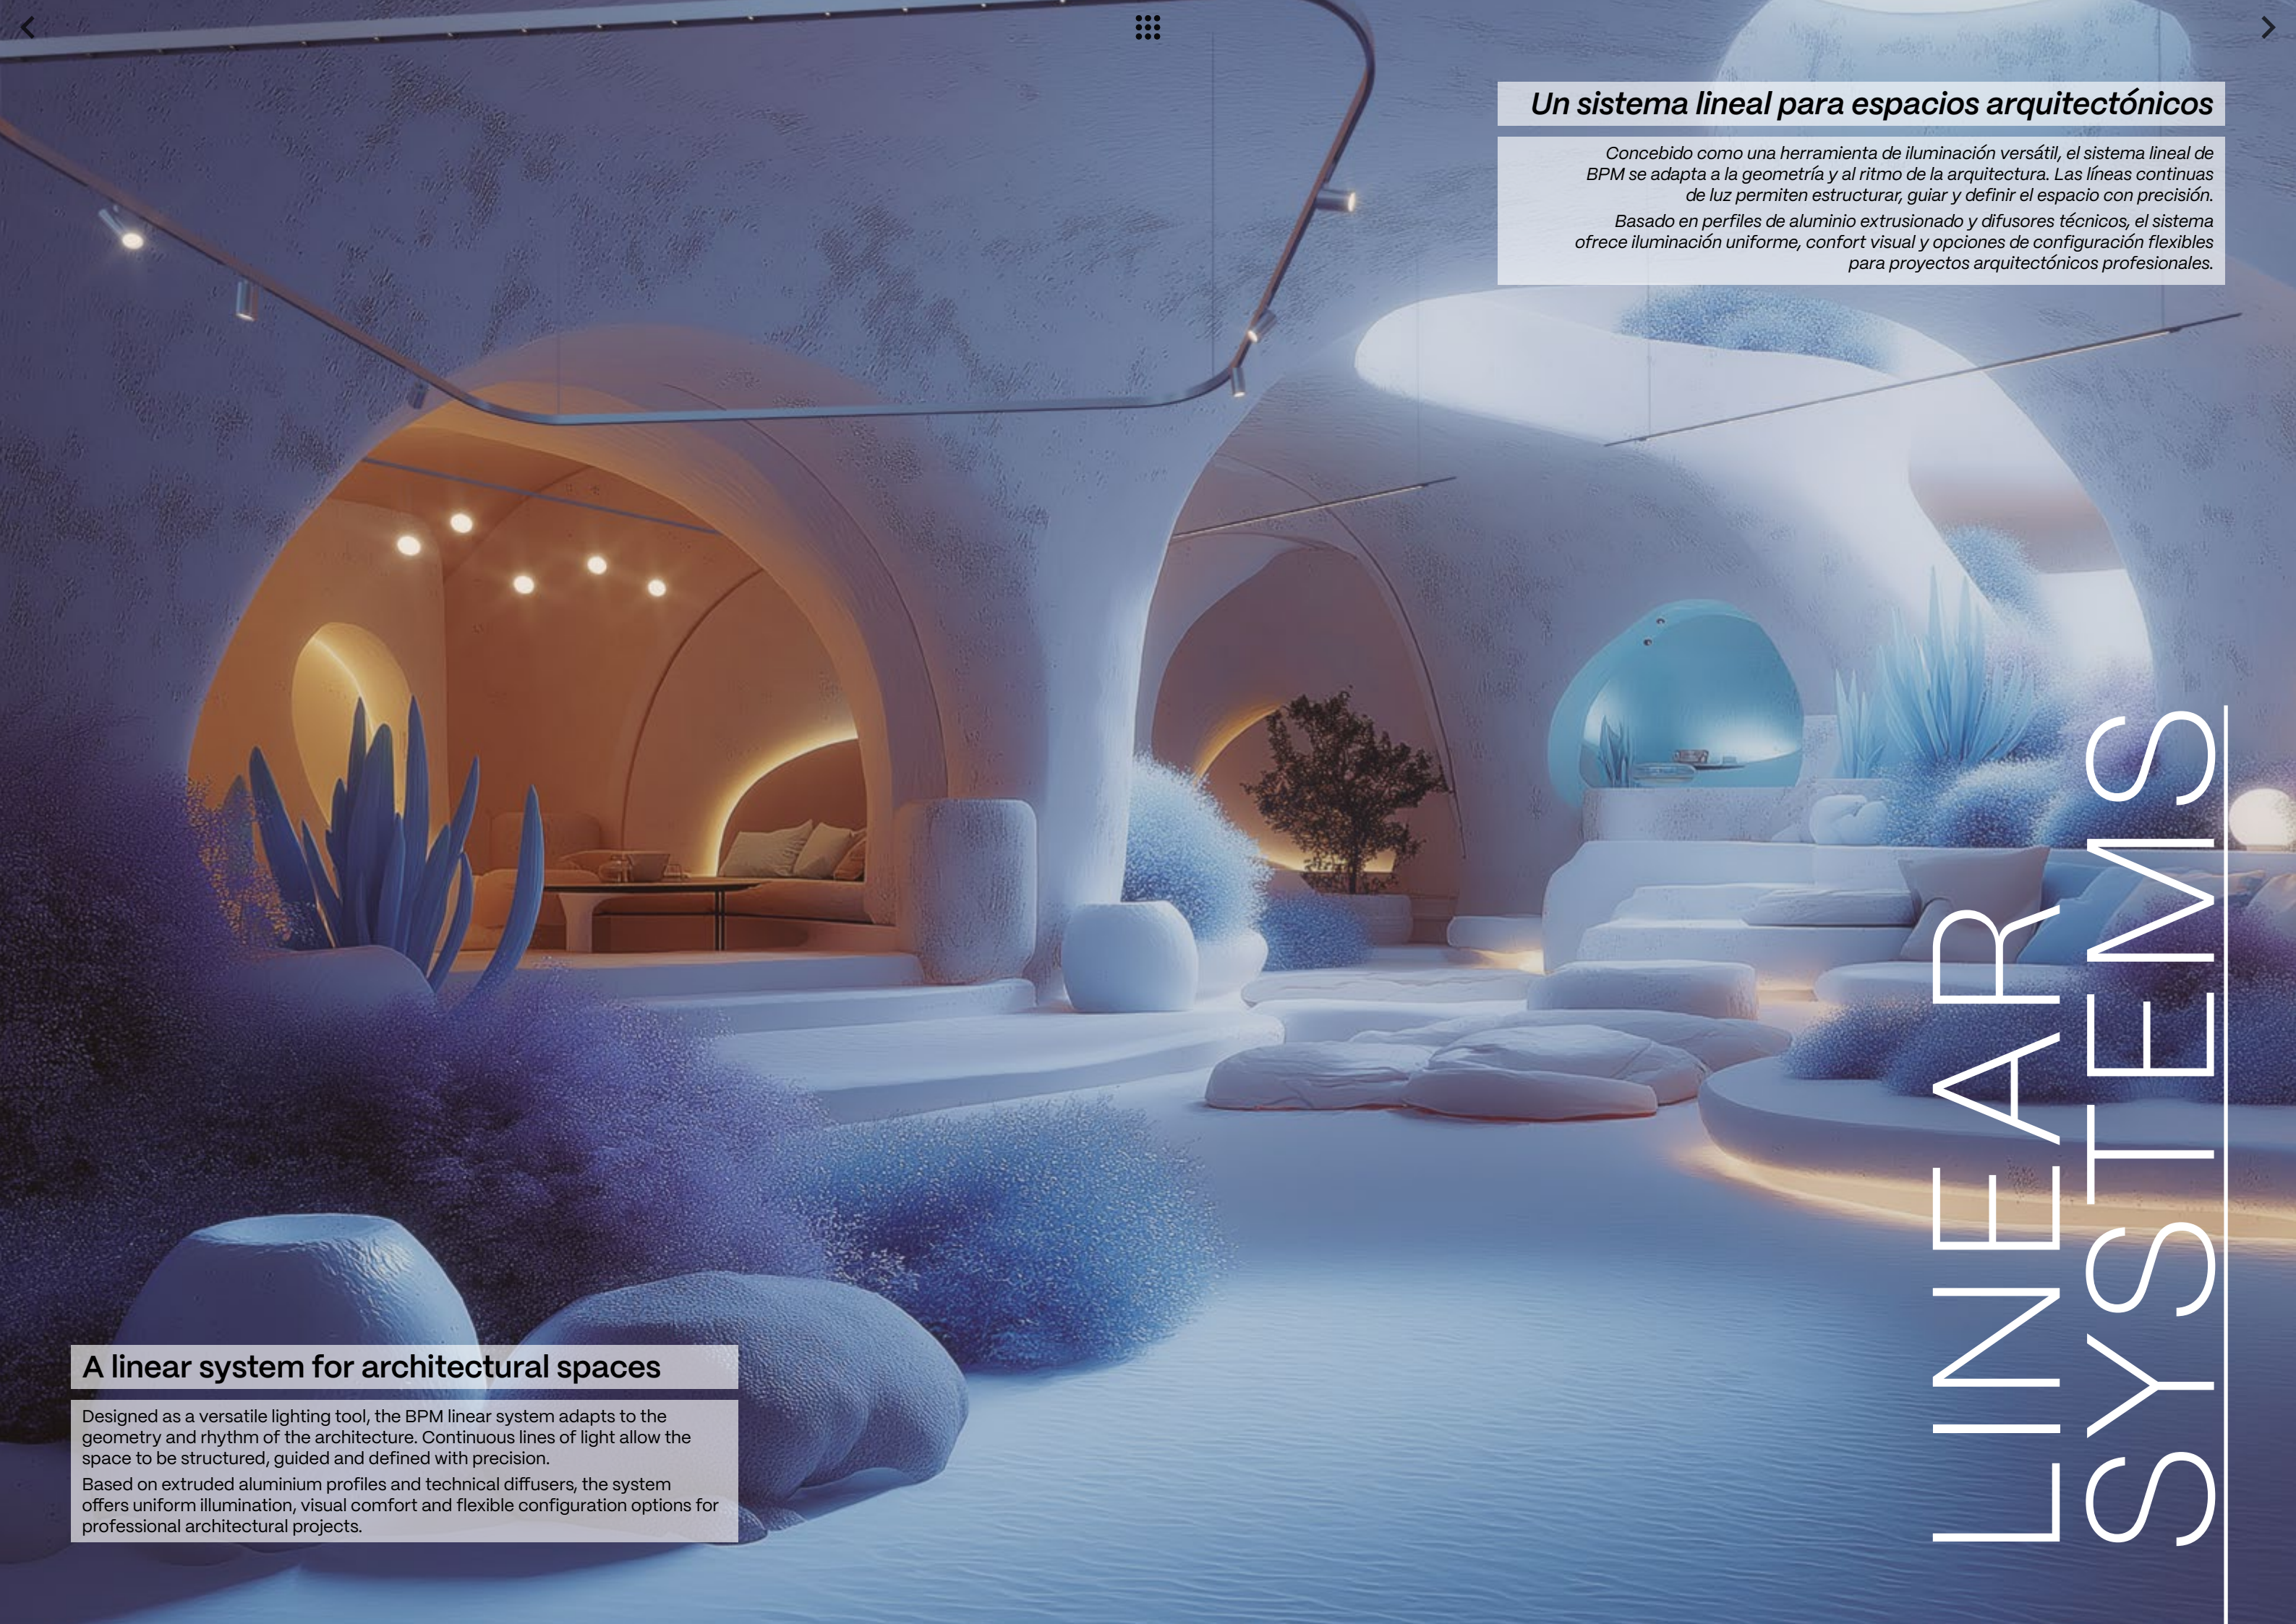

Un sistema lineal para espacios arquitectónicos

Concebido como una herramienta de iluminación versátil, el sistema lineal de BPM se adapta a la geometría y al ritmo de la arquitectura. Las líneas continuas de luz permiten estructurar, guiar y definir el espacio con precisión.

Basado en perfiles de aluminio extrusionado y difusores técnicos, el sistema ofrece iluminación uniforme, confort visual y opciones de configuración flexibles para proyectos arquitectónicos profesionales.

A linear system for architectural spaces

Designed as a versatile lighting tool, the BPM linear system adapts to the geometry and rhythm of the architecture. Continuous lines of light allow the space to be structured, guided and defined with precision.

Based on extruded aluminium profiles and technical diffusers, the system offers uniform illumination, visual comfort and flexible configuration options for professional architectural projects.

LINEAR SYSTEMS

ALARIK FAMILY

PAG. 164

TRACKLIGHT FAMILY

PAG. 184

ALBA FAMILY

PAG. 192

FLY

PAG. 236

VAULT

PAG. 242

OKKIA

PAG. 248

ALZIRA


PAG. 254

LINEAR SYSTEMS







ALARIK FAMILY

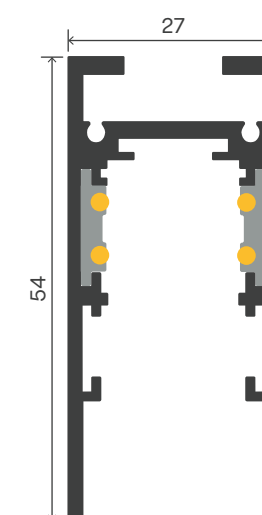

ALARIK SLIM
REF. 230
PAG. 166




ALARIK MINI
REF. 200
PAG. 172




ALARIK NANO
REF. 215
PAG. 178

ALARIK SLIM

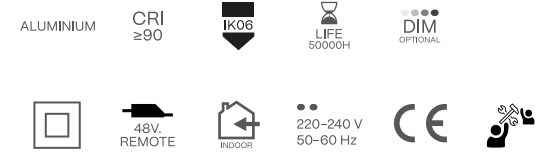


LIGHT MODULES

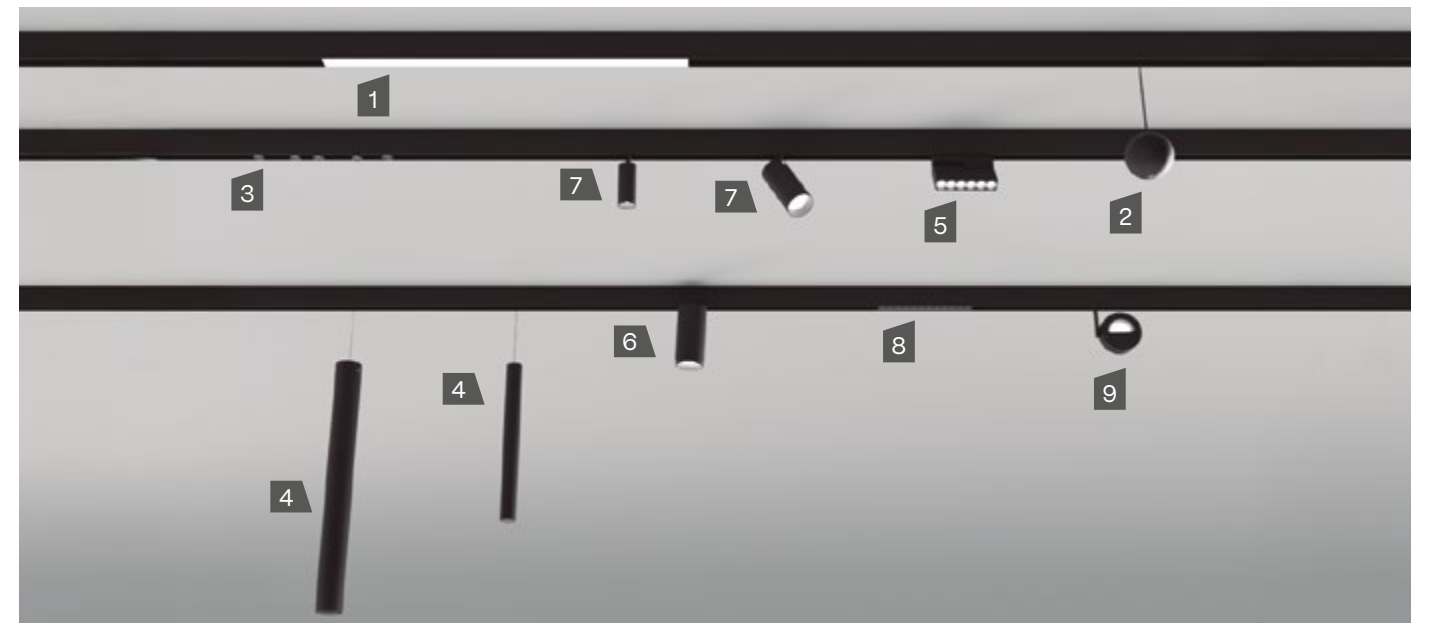

1. SLIM LED MODULES

IP20				
	48 VdC	7 W 1004 - 1027 - 1038 lm	14 W 2007 - 2053 - 2076 lm	27 W 3670 - 3754 - 3796 lm
Opal	2700 K	233EB9B112 ✖	233EE9B112 ✖	233EH9B112 ✖
	3000 K	233EB9B113 ✖	233EE9B113 ✖	233EH9B113 ✖
	4000 K	233EB9B115 ✖	233EE9B115 ✖	233EH9B115 ✖

Opal



The data shown corresponds to raw values.


FINISH
B · Black
W · White


DIMM OPTIONS
O · On-Off
D · Dali
V · 1:10v

Down light

LIGHT MODULES


2. SLIM LED BALL

IP20				
	48 VdC			7 W 793 - 826 - 875 lm
	2700 K			232EB9  152 
	3000 K			232EB9  153 
	4000 K			232EB9  155 




3. SLIM DOT

IP20				
	48 VdC			2 W
				130 - 145 - 161 lm
20 °C	2700 K			231EB9B1320
	3000 K			231EB9B1330
	4000 K	231EB9B1350		





4. SLIM LED TUBE

IP20				
	48 VdC	3 W 151 - 187 - 212 lm	14 W 810 - 820 - 881 lm	
	2700 K	234EB9 1 2	234EH9 1 2	
	3000 K	234EB9 1 3	234EH9 1 3	
	4000 K	234EB9 1 5	234EH9 1 5	

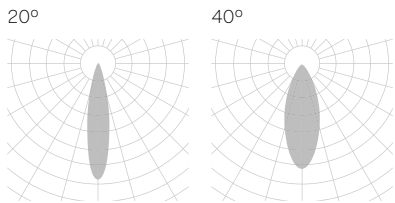

5. SLIM MOTION LENSES

IP20					
					
					
	48 VdC	9 W 749 - 832 - 894 lm			
15° - 38°	2700 K	237EB9B1  2 			
	3000 K	237EB9B1  3 			
	4000 K	237EB9B1  5 			

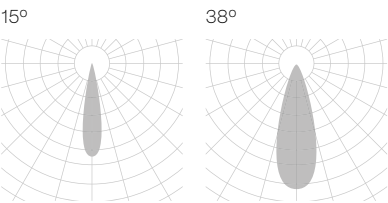

The data shown corresponds to raw values.

- BEAM ANGLE**

 - 1 · 15°
 - 3 · 20°
 - 5 · 40° - 38°
- FINISH**


 - B · Black
 - W · White
- DIMM OPTIONS**

 - O · On-Off
 - D · Dali
 - V · 1.10v
- Down light

LIGHT MODULES


6. SLIM PATRICIA ZOOM

IP20			
	48 VdC		21 W 2368 - 2476 - 2620 lm
	2700 K		239EB9
	3000 K		239EB9
	4000 K		239EB9

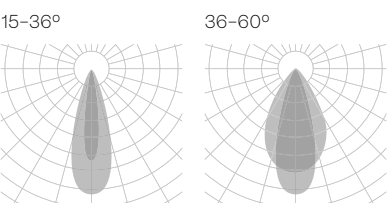


7. SLIM PATRICIA

IP20					
 350° 90° 	 48 VdC	7 W 784 – 819 – 867 lm	13 W 1306 – 1366 – 1445 lm		
	2700 K	238EB9 1 2	238EE9 1 2		
	3000 K	238EB9 1 3	238EE9 1 3		
	4000 K	238EB9 1 5	238EE9 1 5		

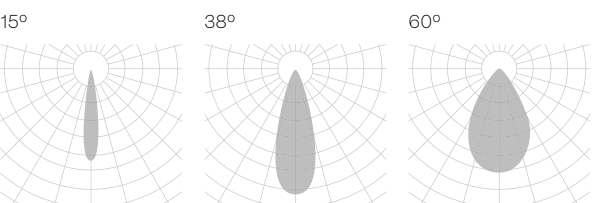

8. SLIM LENSES

IP20					
	48 VdC	9 W 749 – 832 – 894 lm	15 W 1320 – 1626 – 1626 lm		
	2700 K	235EB9B1 2	235EE9B1 2		
	3000 K	235EB9B1 3	235EE9B1 3		
	4000 K	235EB9B1 5	235EE9B1 5		

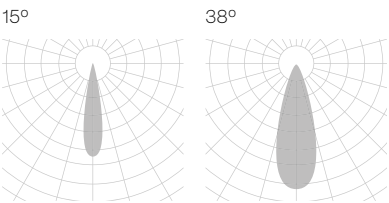

9. SLIM WALL WASHER

IP20			
	48 VdC		16 W 1514 - 1597 - 1674 lm
I	2700 K		241EB9 1 2
	3000 K		241EB9 1 3
	4000 K		241EB9 1 5

The data shown corresponds to raw values.

- BEAM ANGLE**


 - 2 · 15° to 36° - 15°
 - 5 · 36° to 60° - 38°
 - 7 · 60°
- FINISH**

 - B · Black
 - W · White
- DIMM OPTIONS**


 - O · On-Off
 - D · Dali
 - V · 1.10v
- Down light

PROFILES


PENDANT

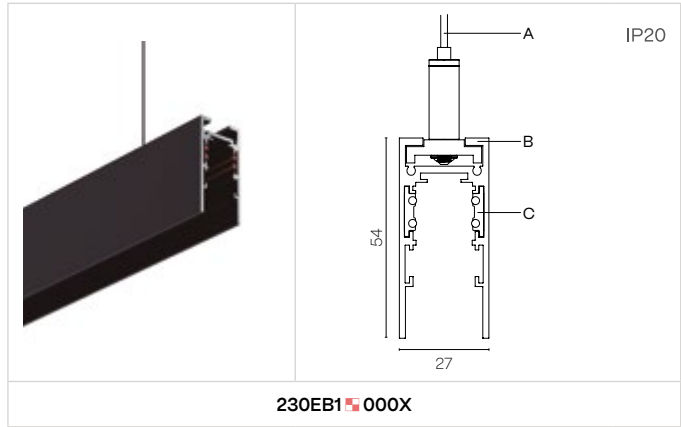


SURFACE

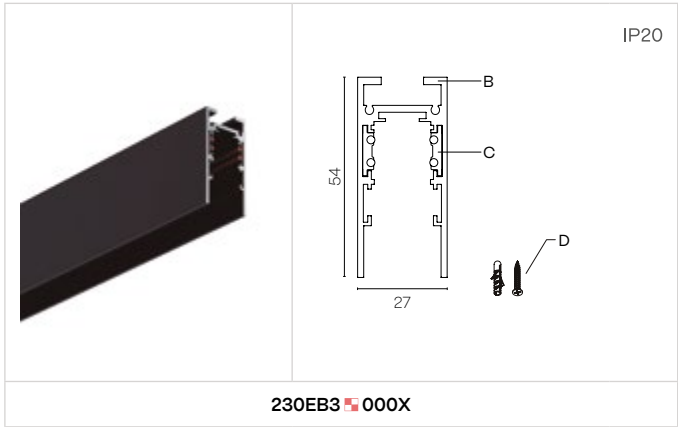


RECESSED WITH FRAME

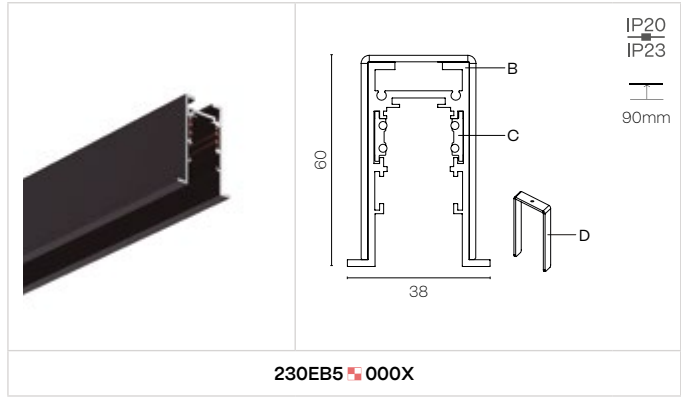


TRIMLESS

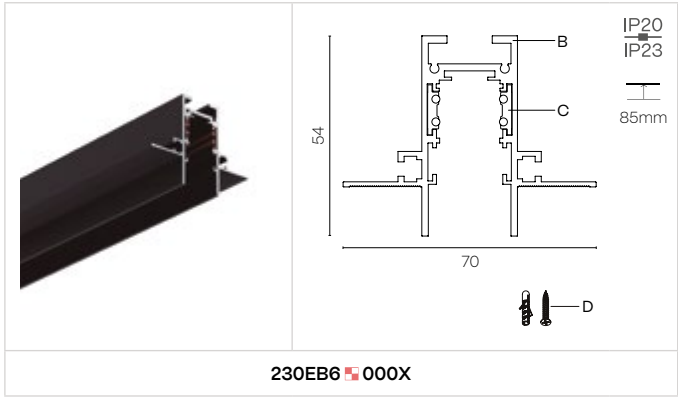

ROUND PENDANT

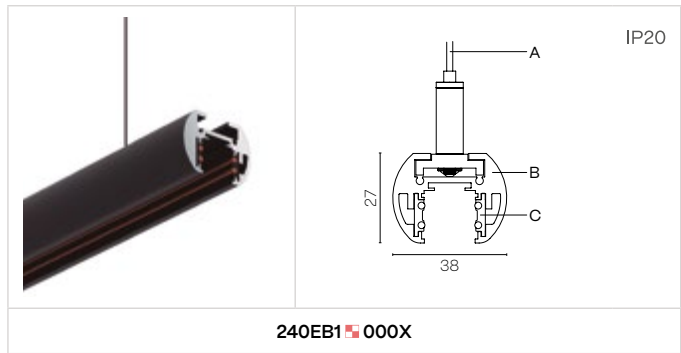

ROUND SURFACE

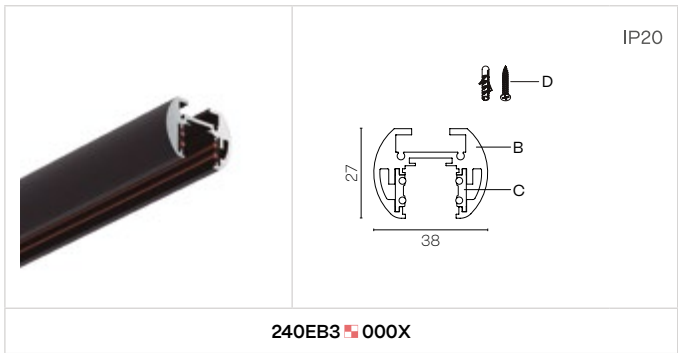


- A - Aircraft cable (3 m)
B - Aluminium profile
C - Electrified track
D - Mounting kit

- FINISH**
B - Black
W - White
S - Special color


- ON DEMAND OPTIONS**
Special finishes
Custom dimensions

COMPONENTS



GENERAL COMPONENTS

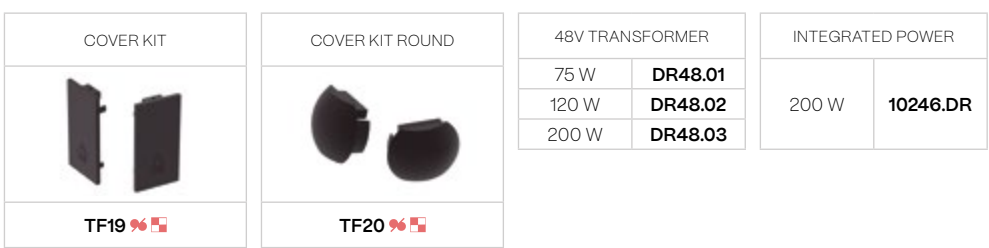

PENDANT COMPONENTS

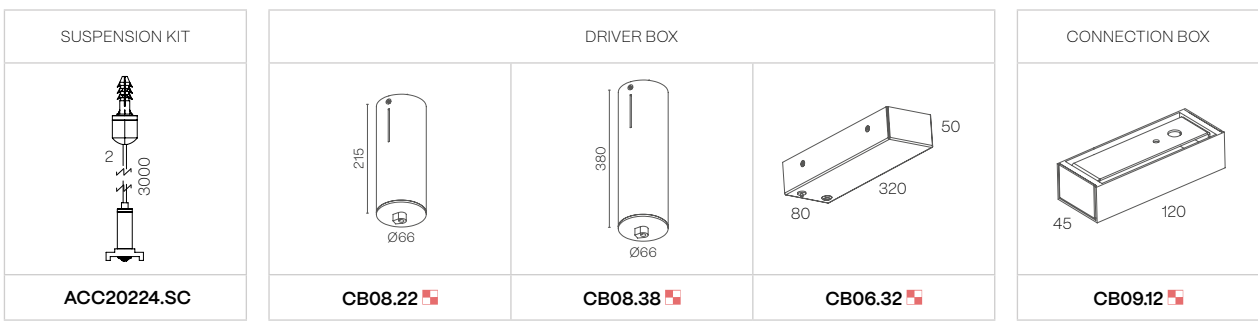

JOINTS & CONNECTORS

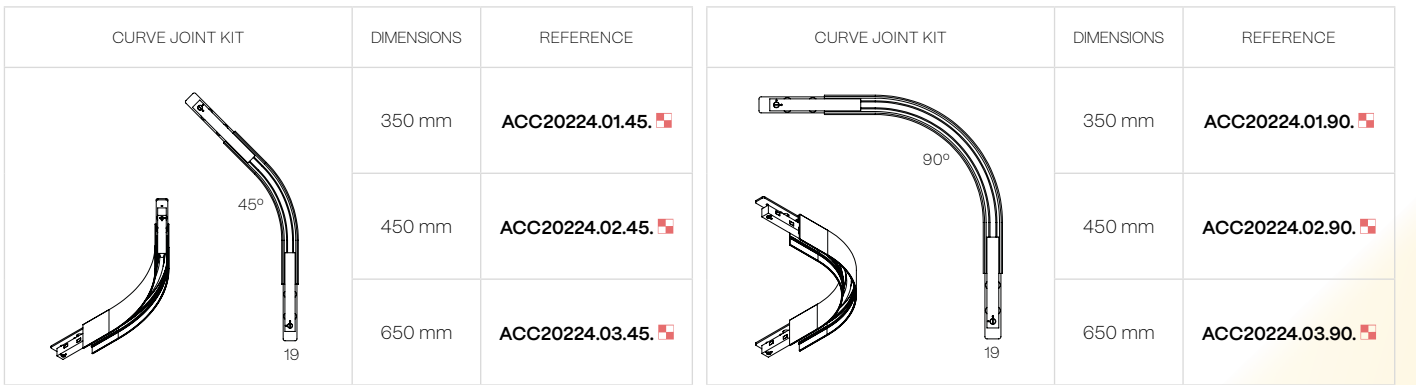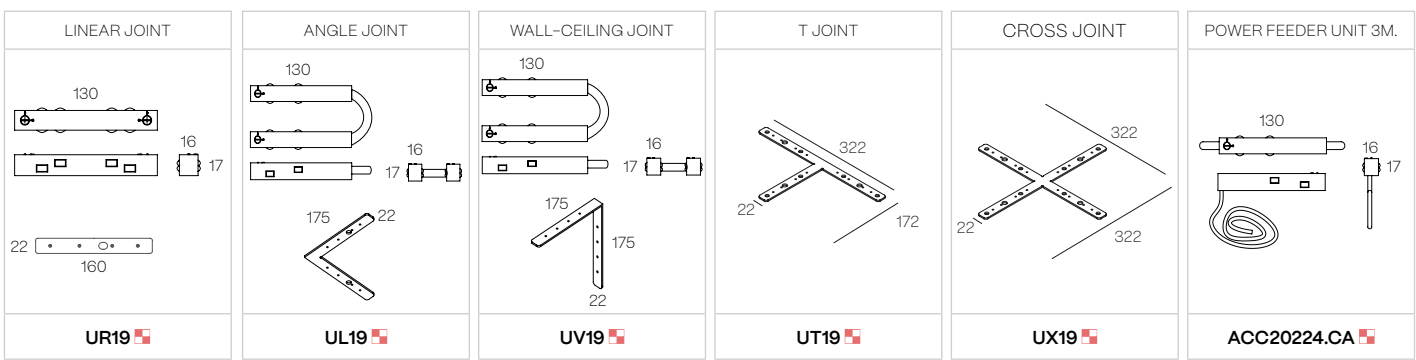

Only for Pendant and Surface installation

Only for Pendant and Surface installation

- INSTALLATION**
1 - Pendant
3 - Surface
5 - Recessed with frame
6 - Trimless
- FINISH**
B - Black
W - White
S - Special color

ALARIK MINI

ALUMINIUM

CRI ≥90

IK06

LIFE 50000H

DIM OPTIONAL

48V REMOTE




INDOOR


220-240 V 50-60 Hz

CE



1. MINI LED MODULES

IP20							
	48 VdC	5 W	10 W	20 W			
		851 - 875 - 880 lm	1673 - 1720 - 1729 lm	3345 - 3440 - 3459 lm			
	2700 K	201EB9B112O	201EE9B112O	201EH9B112O			
	3000 K	201EB9B113O	201EE9B113O	201EH9B113O			
Opal	4000 K	201EB9B115O	201EE9B115O	201EH9B115O			



The data shown corresponds to raw values.

 Down light

LIGHT MODULES


2. MINI LENSES

P20




350°





	48 VdC	7 W 921 - 945 - 1087 lm
23° - 28° - 36°	2700 K	202EB9 1 2 ✖
	3000 K	202EB9 1 3 ✖
	4000 K	202EB9 1 5 ✖

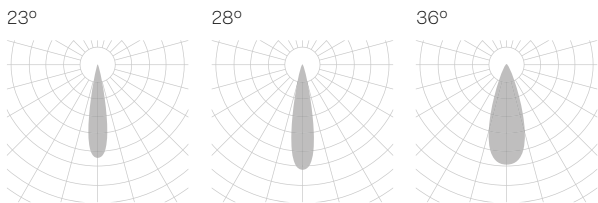

3. MINI MOTION LENSES

IP20




350°




90°





	48 VdC	7 W 921 - 945 - 1087 lm
23° - 28° - 36°	2700 K	203EB9 1 2 ✖
	3000 K	203EB9 1 3 ✖
	4000 K	203EB9 1 5 ✖

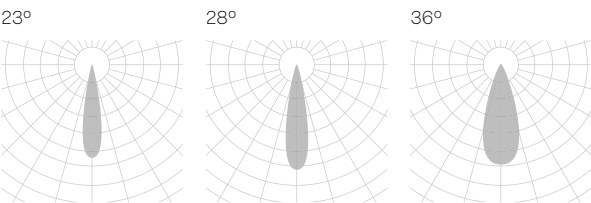

4. MINI PATRICIA

IP20





350°




90°







	48 VdC	2 W 203 - 208 - 239 lm	5 W 612 - 639 - 676 lm
15° - 24° - 30°	2700 K	204EB9 1 2 ✖	204EE9 1 2 ✖
	3000 K	204EB9 1 3 ✖	204EE9 1 3 ✖
	4000 K	204EB9 1 5 ✖	204EE9 1 5 ✖

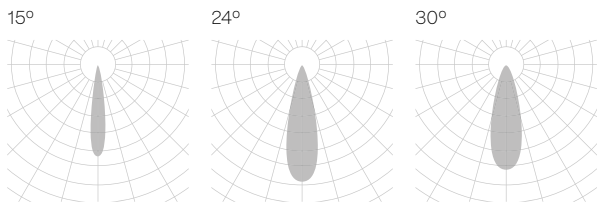

The data shown corresponds to raw values.

-  **FINISH**

B · Black

W · White
-  **BEAM ANGLE**

2 · 15°

3 · 23° - 24°

4 · 28° - 30°

5 · 36°
-  **DIMM OPTIONS**

O · On-Off

D · Dali

 Down light

LIGHT MODULES

5. MINI PATRICIA FLAT

IP20




350°




90°





	48 VdC	5 W 612 - 639 - 676 lm
15° - 30° - 36°	2700 K	205EB9 1 2 ✖
	3000 K	205EB9 1 3 ✖
	4000 K	205EB9 1 5 ✖

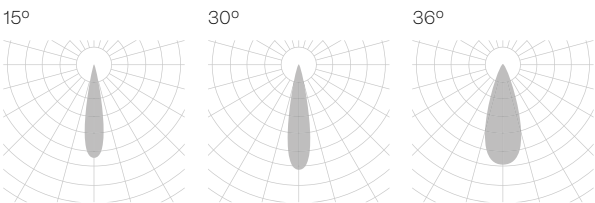

6. MINI PATRICIA LOL

IP20




350°




90°





	48 VdC	5 W 305 - 324 - 325 lm
15° - 24° - 36°	2700 K	206EB9 1 2 ✖
	3000 K	206EB9 1 3 ✖
	4000 K	206EB9 1 5 ✖

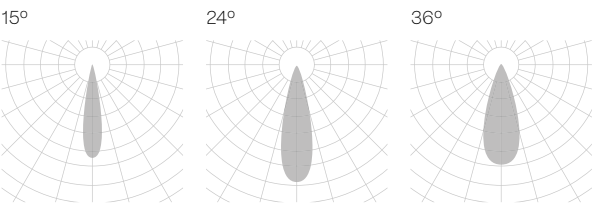

7. MINI PATRICIA ZOOM

IP20




350°




90°





	48 VdC	5 W 612 - 639 - 676 lm
15° to 40°	2700 K	207EB9 122 ✖
	3000 K	207EB9 123 ✖
	4000 K	207EB9 125 ✖

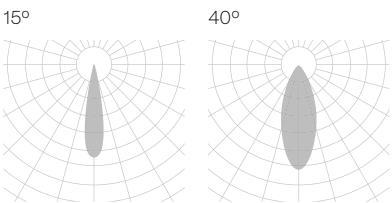


8. MINI ROUND LENSES

IP20




350°



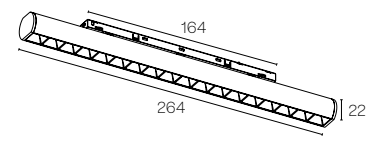

	48 VdC	7 W 921 - 945 - 1087 lm
30° - 36° - 60°	2700 K	209EB9 1 2 ✖
	3000 K	209EB9 1 3 ✖
	4000 K	209EB9 1 5 ✖

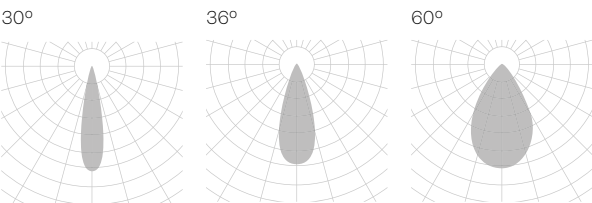

The data shown corresponds to raw values.

-  **FINISH**

B · Black

W · White
-  **BEAM ANGLE**

2 · 15°

3 · 23° - 24°

4 · 30°

5 · 36°

6 · 60°
-  **DIMM OPTIONS**


O · On-Off

D · Dali

 Down light

PROFILES



PENDANT

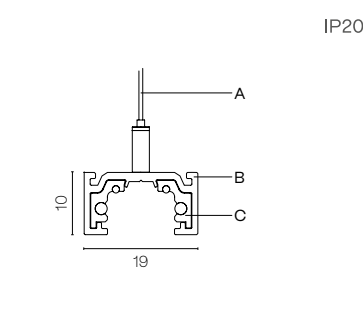

IP20

200EB1 000X


SURFACE

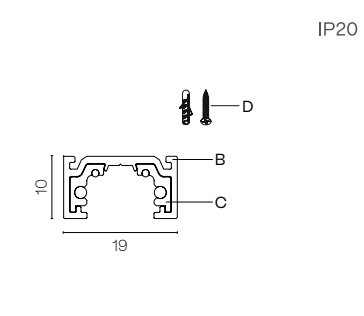

IP20

200EB3 000X

TRIMLESS

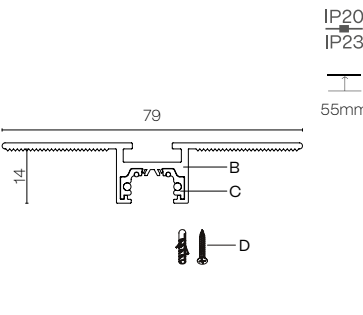


IP20
IP23

200EB6 000X

Total length = profile length + 2 x 2 mm (cover kit)
(Total length + 2 mm) x 30 mm


ROUND PENDANT

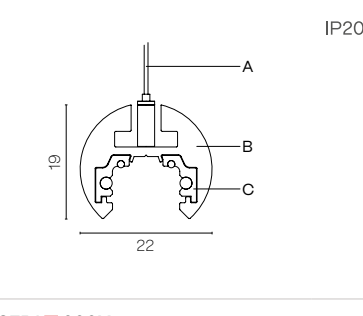

IP20

208EB1 000X

ROUND SURFACE

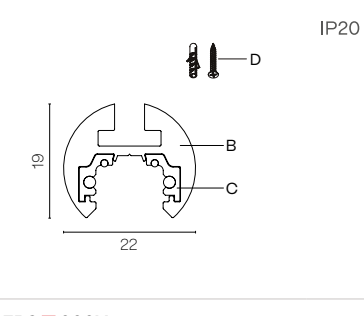

IP20

208EB3 000X

PENDANT INSTALLATIONS

When the profile (without end caps) measures up to 1500 mm, 2 suspension kits are used.
When the profile (without end caps) measures over to 1500 mm, 3 suspension kits are used.

- A – Aircraft cable (3 m)
B – Aluminium profile
C – Electrified track
D – Mounting kit

- FINISH**
B · Black
W · White
S · Special color

- ON DEMAND OPTIONS**
Special finishes
Custom dimensions

COMPONENTS

GENERAL COMPONENTS

COVER KIT




TF21

COVER KIT ROUND




TF22

NOT INTEGRATED POWER FEEDER UNIT



ACC210006.CA

INTEGRATED POWER FEEDER UNIT



ACC210004.CA

48V TRANSFORMER


75 W	DR48.01
120 W	DR48.02
200 W	DR48.03

48V TRANSFORMER BOX only for surface

100 W	A200DBSTX
200 W	A200DBHTX


PENDANT COMPONENTS

SUSPENSION KIT




ACC210004.SC


DRIVER BOX



CB08.22




CB08.38



CB06.32

CONNECTION BOX



CB09.12

JOINTS & CONNECTORS

LINEAR JOINT



UR21

ANGLE JOINT*



UL21

CROSS JOINT*



UC21

T-JOINT*



UT21

WALL-CEILING JOINT*



UV21

*Not available for Round profiles

CURVE JOINT KIT



45°

DIMENSIONS

Ø350 mm
Ø450 mm
Ø650 mm

REFERENCE

ACC210006.01.45
ACC210006.02.45
ACC210006.03.45

CURVE JOINT KIT



90°

DIMENSIONS

Ø350 mm
Ø450 mm
Ø650 mm

REFERENCE

ACC210006.01.90
ACC210006.02.90
ACC210006.03.90

Only for Pendant and Surface installation

- FINISH**
B · Black
W · White
S · Special color

NEW

ALUMINIUM


CRI
≥90



● ●
220–240 V
50–60 Hz





LIGHT MODULES

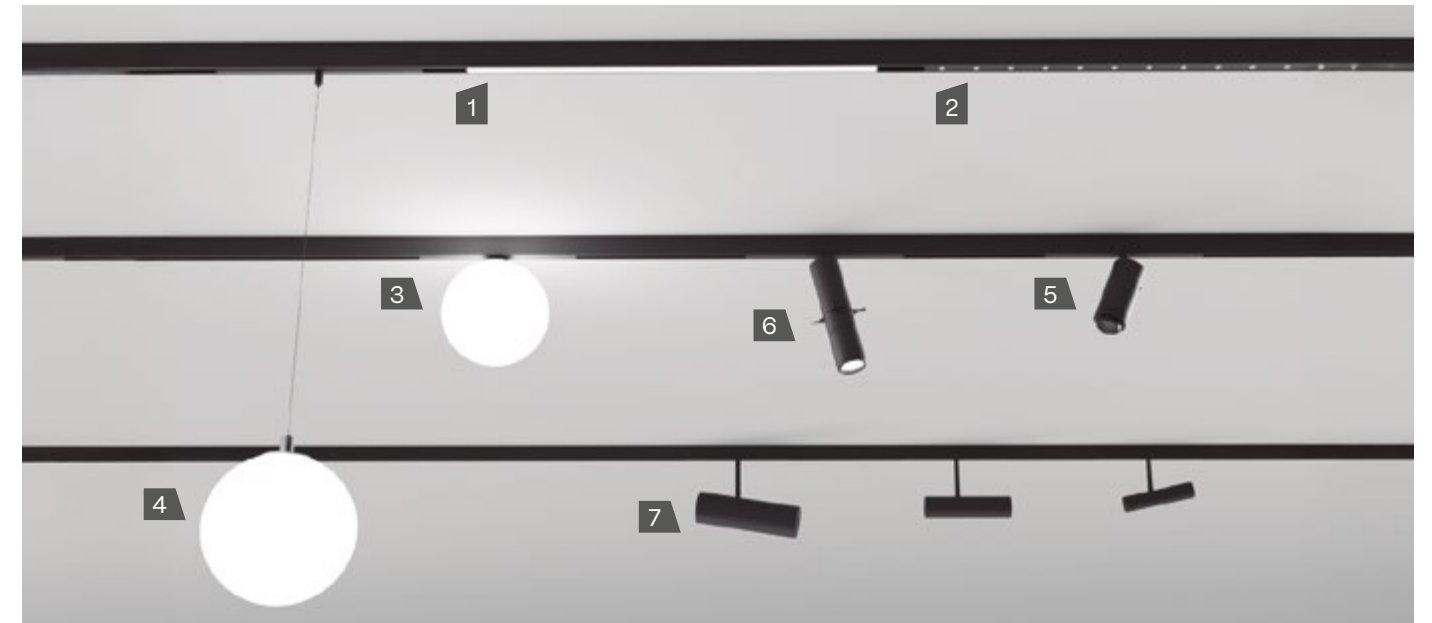


1. NANO LED MODULES

IP20



IP20		300		600		900	
							
		48 VdC 5 W 495 - 512 - 605 lm		7,5 W 743 - 767 - 908 lm		11 W 1114 - 1151 - 1374 lm	
Opal	2700 K	217EB9  112 		217EE9  112 		217EH9  112 	
	3000 K	217EB9  113 		217EE9  113 		217EH9  113 	
	4000 K	217EB9  115 		217EE9  115 		217EH9  115 	

Opal



The data shown corresponds to raw values.



B · Black
W · White

DIMM OPTIONS

O · On-Off
D · Dali

 Down light

LIGHT MODULES

2. NANO LENSES COMPACT

IP20

	48 VdC	3 W 324 – 342 – 378 lm
50°	2700 K	218EB9 162
	3000 K	218EB9 163
	4000 K	218EB9 165

50°

2. NANO WALL WASHER

IP20

	48 VdC	9 W 622 – 692 – 761 lm
9°	2700 K	224EB9 142
	3000 K	224EB9 143
	4000 K	224EB9 155

9°

3. NANO ESFERA SURFACE

IP20

	48 VdC	4,5 W 653 – 668 – 676 lm
Opal	2700 K	222EB9 112
	3000 K	222EB9 113
	4000 K	222EB9 115

Opal

4. NANO ESFERA PENDANT

IP20

	48 VdC	4,5 W 653 – 668 – 676 lm
Opal	2700 K	223EB9 112
	3000 K	223EB9 113
	4000 K	223EB9 115

Opal

The data shown corresponds to raw values.

- FINISH**

B · Black

W · White
- DIMM OPTIONS**

O · On-Off

D · Dali
- Down light

LIGHT MODULES

5. NANO PATRICIA ZOOM

IP20

	48 VdC	5,5 W 565 – 640 – 685 lm
18 to 31°	2700 K	221EB9 132
	3000 K	221EB9 133
	4000 K	221EB9 135

18°

31°

6. NANO PATRICIA SHAPE

IP20

	48 VdC	5,5 W 357 – 380 lm
20 to 33°	2700 K	220EB9 132
	3000 K	220EB9 133
	4000 K	220EB9 135

20°

33°

7. NANO PATRICIA FLIP

IP20

	48 VdC	3,5 W 424 – 480 – 513 lm	5,5 W 565 – 640 – 685 lm
24°	2700 K	219EB9 132	219EE9 132
	3000 K	219EB9 133	219EE9 133
	4000 K	219EB9 135	219EE9 135
36°	2700 K	219EB9 152	219EE9 152
	3000 K	219EB9 153	219EE9 153
	4000 K	219EB9 155	219EE9 155

18°

24°

36°

43°

The data shown corresponds to raw values.

- FINISH**

B · Black


W · White
- DIMM OPTIONS**

O · On-Off

D · Dali
- Down light

PROFILES


PENDANT



IP20

215EB1 000X


PENDANT DOUBLE



IP20

216EB1 000X


SURFACE



IP20

215EB3 000X

TRIMLESS



IP20
IP23

215EB6 000X

PENDANT INSTALLATIONS

When the profile (without end caps) measures up to 2000 mm, 2 suspension kits are used.
When the profile (without end caps) measures over to 2000 mm, 3 suspension kits are used.

- A – Aircraft cable (3 m)
B – Aluminium profile
C – Electrified track
D – Mounting kit

- FINISH**
B · Black
W · White
S · Special color

- ON DEMAND OPTIONS**
Special finishes
Custom dimensions

COMPONENTS


GENERAL COMPONENTS

NANO OPAQUE



ACC210022

NANO COVER KIT



TF26

NANO DOUBLE COVER KIT




TF271

48V TRANSFORMER	
75 W	DR48.01
120 W	DR48.02
200 W	DR48.03

48V TRANSFORMER BOX only for surface	
100 W	A201DBSTX
200 W	A201DBHTX

PENDANT COMPONENTS

SUSPENSION KIT



ACC210022.SC


DRIVER BOX



CB08.22




CB08.38



CB06.32


CONNECTION BOX



CB09.12


JOINTS & CONNECTORS

ALARIK NANO POWER FEEDER 48V




ACC210022.CA

ALARIK NANO ELECTRICAL ANGLE JOINT



ACC210022.UL

ALARIK NANO ELECTRICAL LINEAR & UP-DOWN JOINT




ACC210022.UR

NANO LINEAR JOINT *1




UR22

NANO ANGLE JOINT (PENDANT – SURFACE) *2



UL24

NANO ANGLE JOINT (TRIMLESS) *2




UL24.TR

*1 Requires two units for Alarik Nano Double profile. *Requiere de dos unidades para el perfil Alarik Nano Double.*
*2 Only works with Alarik Nano profile. *Únicamente funciona en el perfil Alarik Nano.*

- INSTALLATION**
1 · Pendant
3 · Surface
6 · Trimless


- FINISH**
B · Black
W · White

TRACKLIGHT

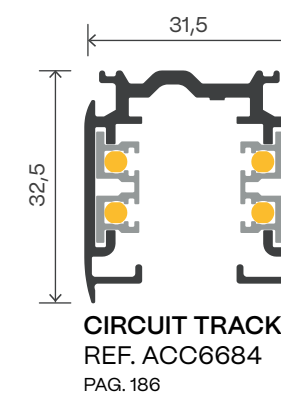


TRACKLIGHT




NEW

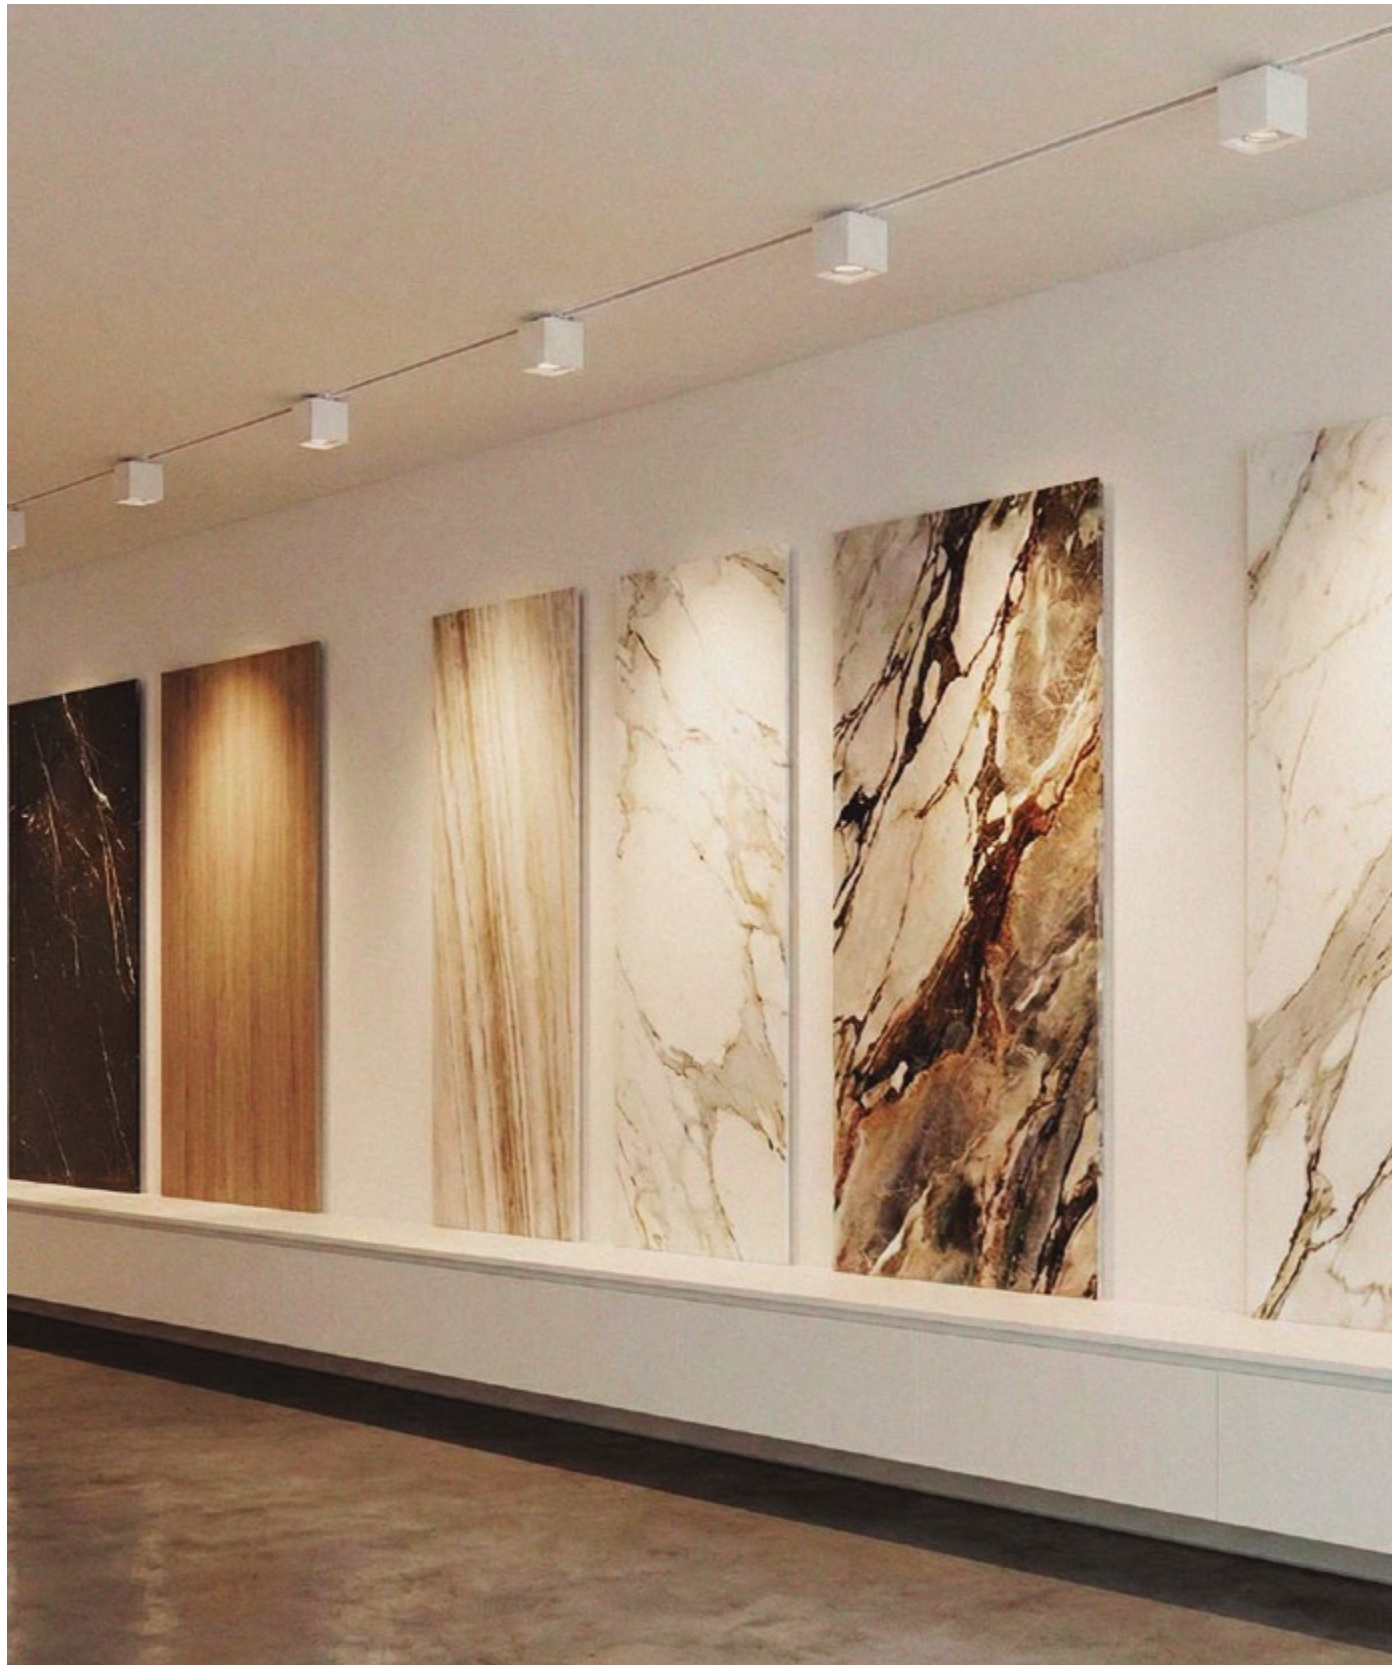

LIGHT MODULES

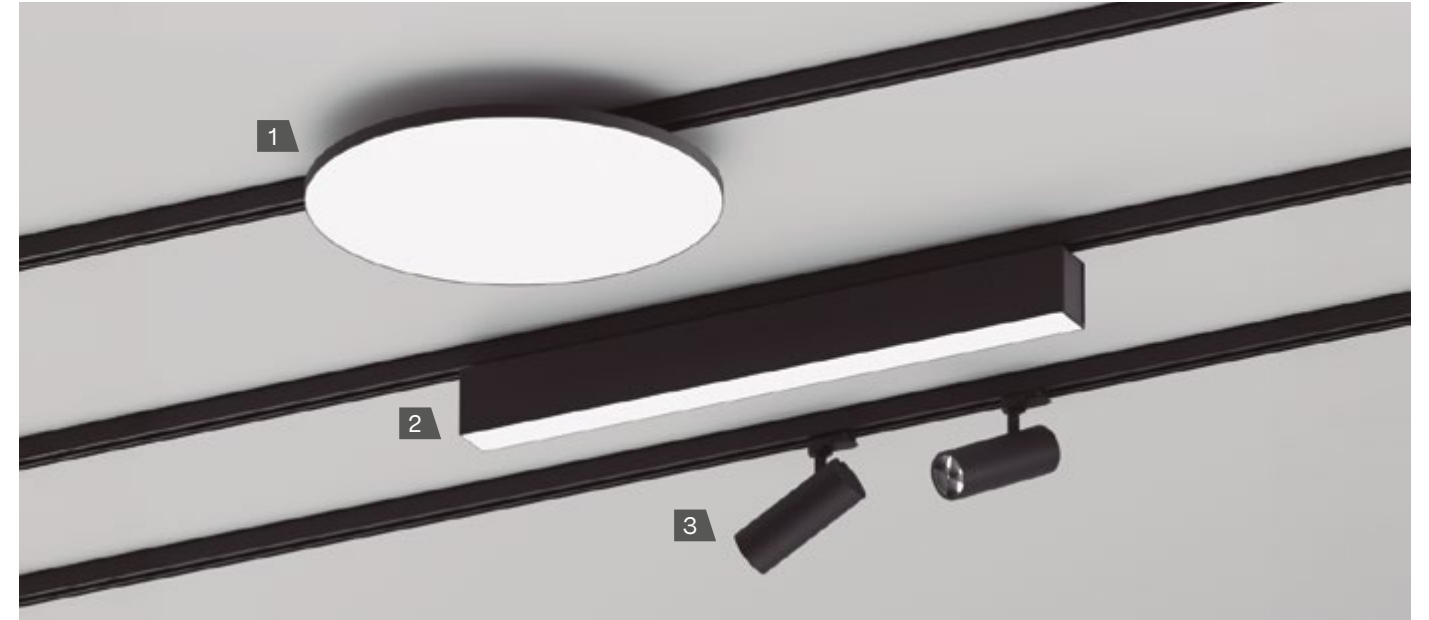

1. LUMINAIRES

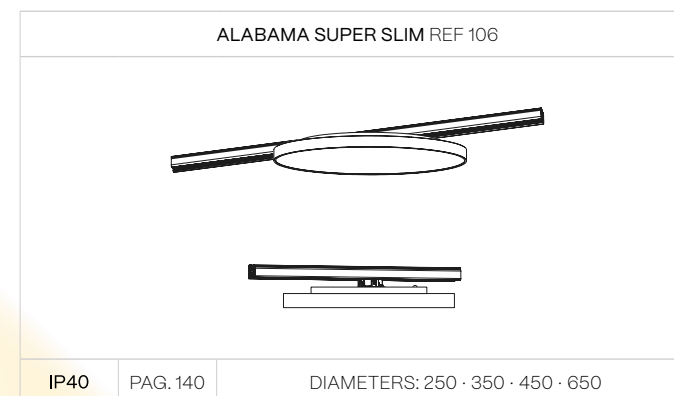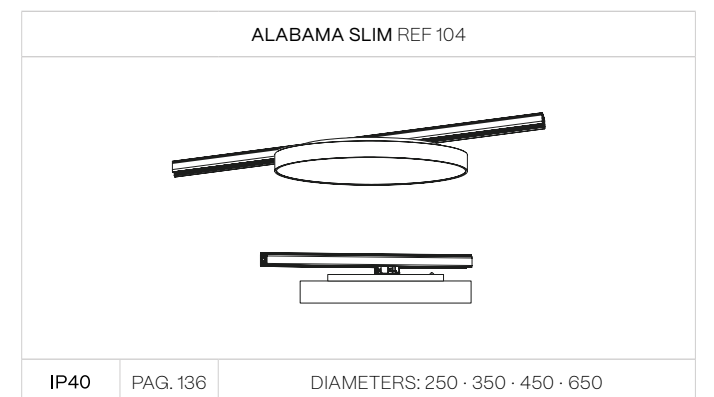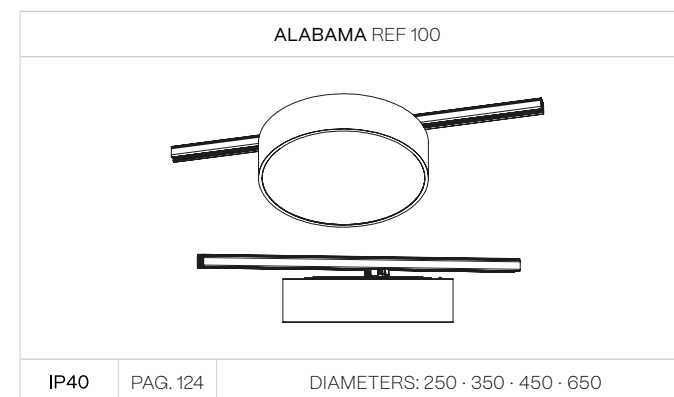


For technical data, other installations and general information, see the page below each product.

LIGHT MODULES


2. LINEAR SYSTEM

ALBA PRO REF 255

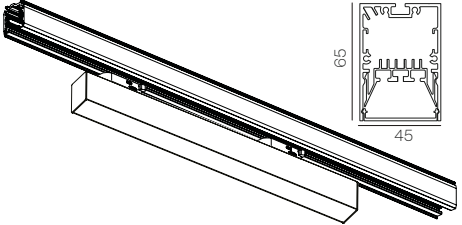

IP40 PAG. 214 LENGTH: 843 · 1124 · 1405 · 1686 · 1967 · 2248


ALBA PLUS REF 254

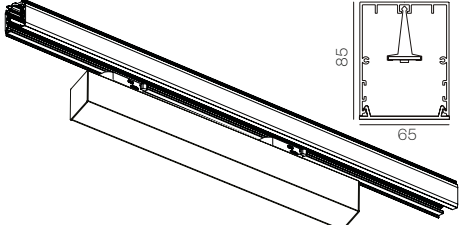

IP40 PAG. 220 LENGTH: 843 · 1124 · 1405 · 1686 · 1967 · 2248


3. SPOTLIGHTS

CUBE REF 309




IP20 INTEGRATED PAG. 298

CUBE TUBE REF 312




IP20 INTEGRATED PAG. 300

CUBE TUBE REF 312




IP20 INTEGRATED PAG. 300

CUBE TUBE REF 312




IP20 INTEGRATED PAG. 300

CUBE TUBE REF 312




IP20 INTEGRATED PAG. 300

KLIMT REF 320




IP20 INTEGRATED PAG. 292

KLIMT REF 320



IP20 INTEGRATED PAG. 292

KLIMT REF 320




IP20 INTEGRATED PAG. 292

For technical data, other installations and general information, see the page below each product.

LIGHT MODULES


3. SPOTLIGHTS

LUK CRUSADER REF 330




IP20 INTEGRATED PAG. 306

LUK HAWKEYE REF 331




IP20 INTEGRATED PAG. 308

LUK HAWKEYE DOUBLE REF 332




IP20 INTEGRATED PAG. 308

MARTORELL TUBE MOVE REF 345




IP20 INTEGRATED PAG. 272

ORACLE REF 354




IP20 INTEGRATED PAG. 312

PATRICIA REF 355




IP20 INTEGRATED PAG. 286

PATRICIA REF 355




IP20 INTEGRATED PAG. 286

PATRICIA REF 355



IP20 INTEGRATED PAG. 286

PATRICIA REF 355




IP20 INTEGRATED PAG. 286

For technical data, other installations and general information, see the page below each product.

PROFILES & COMPONENTS


SURFACE

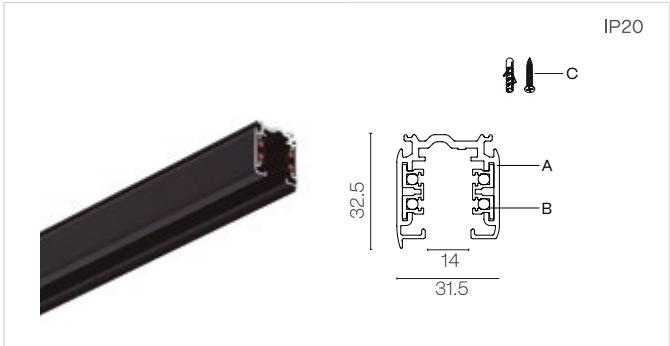

	1m	2m
On-Off	ACC6684.01.SR.	ACC6684.02.SR.
DALI	ACC6684.01.SR. .DA	ACC6684.02.SR. .DA

Add pendant mounting to track profile ACC6684.01.SR & ACC6684.02.SR with accesories ACC6665 + ACC6666.

RECESSED WITH FRAME

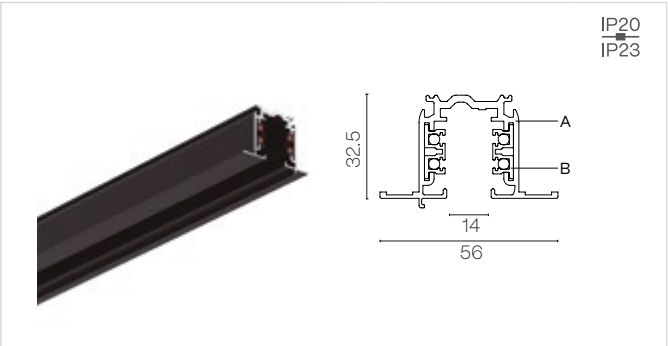

	1m	2m
On-Off	ACC6684.01.RF.	ACC6684.02.RF.
DALI	ACC6684.01.RF. .DA	ACC6684.02.RF. .DA

JOINTS & CONNECTORS

L - CORNER ADJUSTABLE ACC6660 .DA	L - CORNER ACC6659 .DA	T - ANGLE ACC6661 .DA	X - ANGLE ACC6662 .DA
MIDDLE POWER SUPPLY ACC6681 .DA	STRAIGHT COUPLER ACC6682 .DA	POWER SUPPLY ACC6656 .DA	DALI ADAPTER ACC6685

When the track is supplied with DALI regulation, it features a 6-circuit system: four dedicated to copper conduction and two for data transmi3i3n.

- A - Aluminium profile

B - Electrified track

C - Mounting kit
- PROFILE FINISH**

B · Black

W · White

S · Special color
- JOINT & CONNECTOR FINISH**

BK-BK · Black - black

WH-WH · White - white
- ON DEMAND OPTIONS**

Special finishes

Custom dimensions

COMPONENTS

COVERS COMPONENTS

POWER SUPPLY COVER ACC6671	CONNECTOR COVER L ACC6687	CONNECTOR COVER T ACC6686	CONNECTOR COVER X ACC6664 .DA	TRACK COVER STRIP 2M ACC6688
-----------------------------------	----------------------------------	----------------------------------	--------------------------------------	-------------------------------------

CAPS COMPONENTS

END CAP SR ACC6663	END CAP RF ACC6689
---------------------------	---------------------------

PENDANT COMPONENTS


BRACKET FOR PENDANT INST. ACC6665	SUSPENSION KIT 5M ACC6666
--	----------------------------------

OTHER COMPONENTS


THREADED ROD M6 ACC6667	TUBE FOR ROD ACC6669	NUT M6 EXTENSION NUT M6 ACC6668	NUT M6 NUT THREADED ROD M6 ACC6670	TOOL FOR ADAPTER WIRING ACC6690
--------------------------------	-----------------------------	---	--	--

- FINISH**
- B · Black
- W · White
- S · Special color


ALBA FAMILY




ALBA MINI
REF. 251
PAG. 196

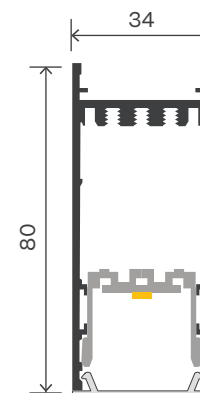


ALBA MINI AIO
REF. 253
PAG. 200

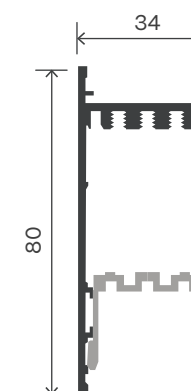


**ALBA MINI
MODULIGHT**
REF. 280
PAG. 204

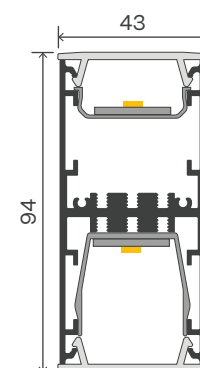


ALBA DOUBLE
REF. 250
PAG. 224




ALBA WING
REF. 290
PAG. 210




ALBA PRO
REF. 255
PAG. 214



ALBA PLUS
REF. 254
PAG. 220



ALBA LINGGO MINI
REF. 276
PAG. 228



ALBA LINGGO
REF. 275
PAG. 232

LINEAR SYSTEM MEASURES

The following lengths are available and can be applied generically across all product lines: **0M, 1, 1M, 2, 2M, 3, 3M, 4, 4M, 5, 5M, 6, 6M, 7, 7M, 8, 8M, 9, 9M and 10.**

These lengths correspond to the sizes of the light boards, available in two versions: 140 mm and 280 mm. Wattage and lumen values are defined per board, ensuring consistent luminous performance and energy efficiency across the entire range.

Thanks to this modular system, all lengths are fully compatible and can be used interchangeably across the following models: **ALBA PRO, ALBA PLUS, ALBA MINI, ALBA MINI AIO, ALBA MINI MODULIGHT, ALBA WING, ALBA PRO, ALBA PLUS, ALBA DOUBLE, ALBA LINGGO MINI, ALBA LINGGO and ALZIRA.**

By using the latest **LED technologies** in the boards, an **extended lifetime of up to 102,000 hours (L80B10)** has been achieved, representing a significant improvement over previous generations. This ensures long-term luminous stability and reduced maintenance over time. In addition, **luminous efficacy** has been increased up to **180 lm/W**, achieving an energy **efficiency class C.**

As a result of this technical evolution, the range offers a more **robust, durable and versatile solution**, capable of meeting the most demanding requirements of architectural projects and continuous lighting applications.


Our strong commitment to sustainable materials, together with the **C2C certification** of the boards and improved performance, makes our **luminaires a safe and environmentally responsible choice.**

			POWER STANDARD				POWER HIGH			
REF.		ELECTRIC SYSTEM LENGHT	W	27K	3K	4K	W	27K	3K	4K
A	0 M	141 mm	3	409	484	521,5	6	818	969	1043
B	1	281 mm	6	818	969	1043	11	1636	1938	2086
C	1 M	422 mm	8	1227	1453	1564	17	2454	2907	3129
E	2	562 mm	11	1636	1938	2086	22	3372	3876	4172
G	2 M	703 mm	14	2045	2422	2607	28	4090	4845	5215
H	3	843 mm	17	2454	2907	3129	33	4908	5814	6258
I	3 M	984 mm	20	2863	3391,5	3650,5	39	5726	6783	7301
J	4	1124 mm	22	3272	3876	4172	45	6544	7752	8344
K	4 M	1265 mm	25	3681	4360	4693	50	7362	8721	9387
L	5	1405 mm	28	4090	4845	5215	56	8180	9690	10430
M	5 M	1546 mm	31	4499	5329	5736	61	8998	10659	11473
N	6	1686 mm	33	4908	5814	6258	67	9816	11628	12516
O	6 M	1827 mm	36	5317	6298	6779	72	10634	12597	13559
P	7	1967 mm	39	5726	6783	7301	78	11452	13566	14602
Q	7 M	2108 mm	42	6135	7267	7822	84	12270	14535	15645
R	8	2248 mm	45	6544	7752	8344	89	13088	15504	16688
S	8 M	2389 mm	47	6953	8236	8865	95	13906	16473	17731
T	9	2529 mm	50	7362	8721	9387	100	14724	17442	18774
U	9 M	2670 mm	53	7771	9205	9908	106	15542	18411	19817
V	10	2810 mm	56	8180	9690	10430	111	16360	19380	20860

LINEAR SYSTEM MEASURES

EXAMPLE

The following example shows how to calculate the total length of a luminaire, combining the electrical system length with the dimensions of the end caps and cover kit.



Total length = 141 + 281 + 281 mm (Electric System Length) + 2 x 10 mm (Ends) + 2 x 3 mm (Cover Kit) = **729 mm**

Total lumens at 2700 K (Power Standard) = **2045 lm**

Total power (Power Standard) = **14 W**

Generic reference = **XXX X G % ■ X X X ✕**

Alba Mini reference = **211 E G 1 B 3 4 3 D**

LENGTH CALCULATION FORMULA

The total length of each luminaire varies depending on the model. The following formulas indicate how to calculate the overall length, taking into account the electrical system, end caps, and cover kit.

ALBA MINI

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 12,5 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAME: Total length = Electrical system length + 2 x 12,5 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 2 x 12,5 mm (Ends) + 2 x 2 mm (Cover Kit)

ALBA MINI AIO

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAME: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 2 mm (Cover Kit)

ALBA MINI MODULIGHT

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAME: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 2 mm (Cover Kit)

ALBA WING

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAME: Total length = Electrical system length + 10 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 10 mm (Ends) + 2 x 2 mm (Cover Kit)

ALBA PRO

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAME: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 1 mm (Cover Kit)

ALBA PLUS

PENDANT / SURFACE / WALL SURFACE: Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 3 mm (Cover Kit)

RECESSED WITH FRAME: Total length = Electrical system length + 10 mm (Ends) + 2 x 8 mm (Cover Kit)

TRIMLESS: Total length = Electrical system length + 10 mm (Ends) + 2 x 2 mm (Cover Kit)

ALBA DOUBLE

PENDANT / WALL SURFACE: Total length = Electrical system length + 2 x 20 mm (Ends) + 2 x 3 mm (Cover Kit)

ALBA LINGGO MINI

PENDANT / SURFACE: Total length = Electrical system length + 2 x 14 mm (Ends) + 2 x 9 mm (Cover Kit)

ALBA LINGGO

PENDANT / SURFACE: Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 12 mm (Cover Kit)

ALZIRA

PENDANT: Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 3 mm (Cover Kit)

OKKIA

PENDANT / SURFACE: Total length = Electrical system length + 2 x 5 mm (Ends) + 2 x 2 mm (Cover Kit)

FLY


PENDANT: Total length = Electrical system length + 2 x 150 mm (Cover Kit)

VAULT

PENDANT / SURFACE: Total length = Electrical system length + 420 + 5 + 12 mm (Cover Kit)



ALBA MINI

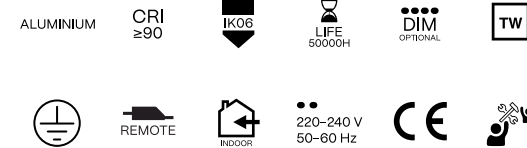


NEW




INSTALLATION




1. PENDANT – PENDANT UP LIGHT

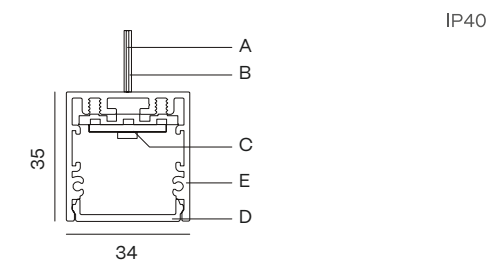


2. SURFACE

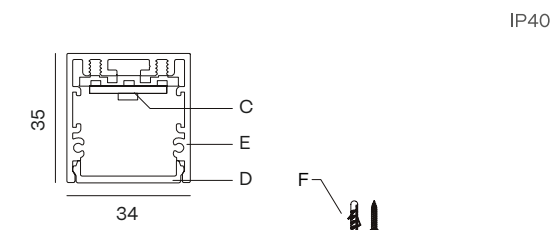


3. RECESSED WITH FRAME

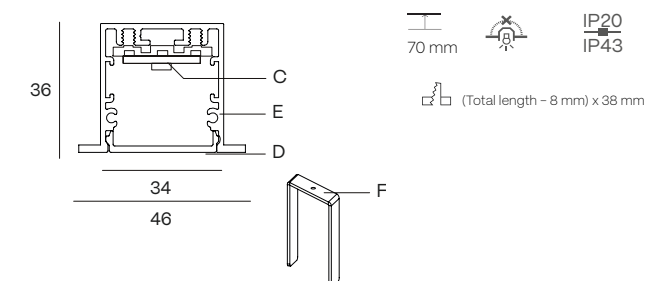

4. TRIMLESS

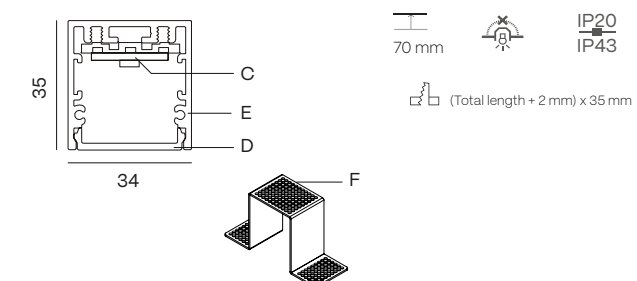

5. WALL SURFACE

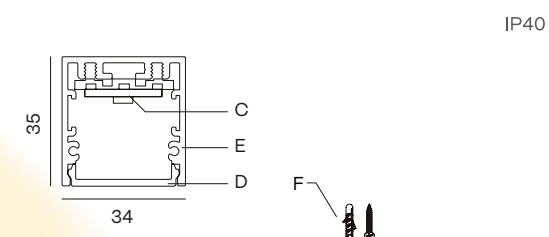

Compatible only with electric system lengths (mm): 281 · 422 · 562
See page 194
Example: **251EB2** **112**

ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

A – Aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser




E – Aluminium profile
F – Mounting kit

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material


COMPONENTS

COVER KIT	REFERENCE
	TF03  2 × 2 mm

BOXES FOR PENDANT – Not included, please select

CONNECTION BOX	REFERENCE	DRIVER BOX NoN-DIMM	REFERENCE	DRIVER BOX DIMMABLE	REFERENCE
	CB09.12 		CB09.32 		CB09.40 

OTHER PENDANT OPTIONS

SUSPENSION KIT	DIMENSION	REFERENCE	2 SUSPENSION ROD	DIMENSION	REFERENCE
	5 m	SC05.SA		600 mm	SC21.60 
	7 m	SC07.SA		800 mm	SC21.80 
	10 m	SC10.SA		1000 mm	SC21.100 

JOINTS

LINEAR JOINT	ANGLE JOINT	T - JOINT	T - JOINT
			
UR03	UL03 	UT03 	UC03 

✂️ INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless
- 7 · Wall surface

🏠 FINISH

- B** · Black
W · White
S · Special color

🔧 ON DEMAND OPTIONS



Special
finishes



Special color
temperatures



Hi power



CRI 80



Emergency
lighting



Motion
detection



Wireless
control options



Custom
dimensions

TECHNICAL INFORMATION


POWER STANDARD

		843	1124	1405	1686	1967	2248
	24 V	4 W 387 – 405 – 425 lm	6 W 622 – 634 – 666 lm	8 W 824 – 840 – 882 lm	10 W 1034 – 1054 – 1107 lm	12 W 1243 – 1268 – 1331 lm	14 W 1460 – 1490 – 1564 lm
	500 mA	17 W 2454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm	33 W 4908 – 5814 – 6258 lm	39 W 5726 – 6783 – 7301 lm	45 W 6544 – 7752 – 8344 lm
Opal	2700 K	251EH  112 	251EJ  112 	251EL  112 	251EN  112 	251EP  112 	251ER  112 
	3000 K	251EH  113 	251EJ  113 	251EL  113 	251EN  113 	251EP  113 	251ER  113 
	4000 K	251EH  115 	251EJ  115 	251EL  115 	251EN  115 	251EP  115 	251ER  115 
Microprismatic	2700 K	251EH  122 	251EJ  122 	251EL  122 	251EN  122 	251EP  122 	251ER  122 
	3000 K	251EH  123 	251EJ  123 	251EL  123 	251EN  123 	251EP  123 	251ER  123 
	4000 K	251EH  125 	251EJ  125 	251EL  125 	251EN  125 	251EP  125 	251ER  125 

POWER HIGH

		843	1124	1405	1686	1967	2248
	24 V	8 W 643 – 683 – 722 lm	12 W 1007 – 1069 – 1131 lm	16 W 1334 – 1417 – 1500 lm	20 W 1674 – 1777 – 1881 lm	24 W 2014 – 2138 – 2263 lm	28 W 2366 – 2512 – 2658 lm
	500 mA	33 W 4908 – 5814 – 6258 lm	45 W 6544 – 7752 – 8344 lm	56 W 8180 – 9690 – 10430 lm	67 W 9816 – 11628 – 12516 lm	78 W 11452 – 13566 – 14602 lm	89 W 13088 – 15504 – 16688 lm
Opal	2700 K	251EH  312 	251EJ  312 	251EL  312 	251EN  312 	251EP  312 	251ER  312 
	3000 K	251EH  313 	251EJ  313 	251EL  313 	251EN  313 	251EP  313 	251ER  313 
	4000 K	251EH  315 	251EJ  315 	251EL  315 	251EN  315 	251EP  315 	251ER  315 
Microprismatic	2700 K	251EH  322 	251EJ  322 	251EL  322 	251EN  322 	251EP  322 	251ER  322 
	3000 K	251EH  323 	251EJ  323 	251EL  323 	251EN  323 	251EP  323 	251ER  323 
	4000 K	251EH  325 	251EJ  325 	251EL  325 	251EN  325 	251EP  325 	251ER  325 

The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

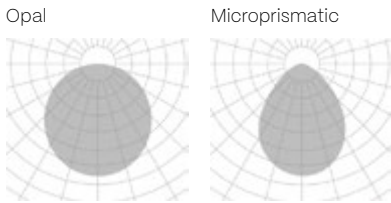

The data shown corresponds to raw values.

✂️ INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless
- 7 · Wall surface

🏠 FINISH

- B** · Black
W · White
S · Special color


✂️ DIMM OPTIONS

- O** · On-Off
D · Dali
P · Push
V · 1.10v

 Up light

 Down light


ALBA MINI AIO

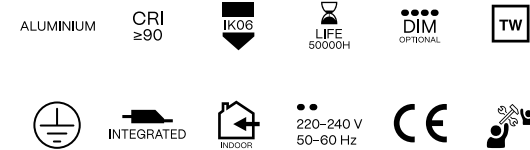


NEW




INSTALLATION

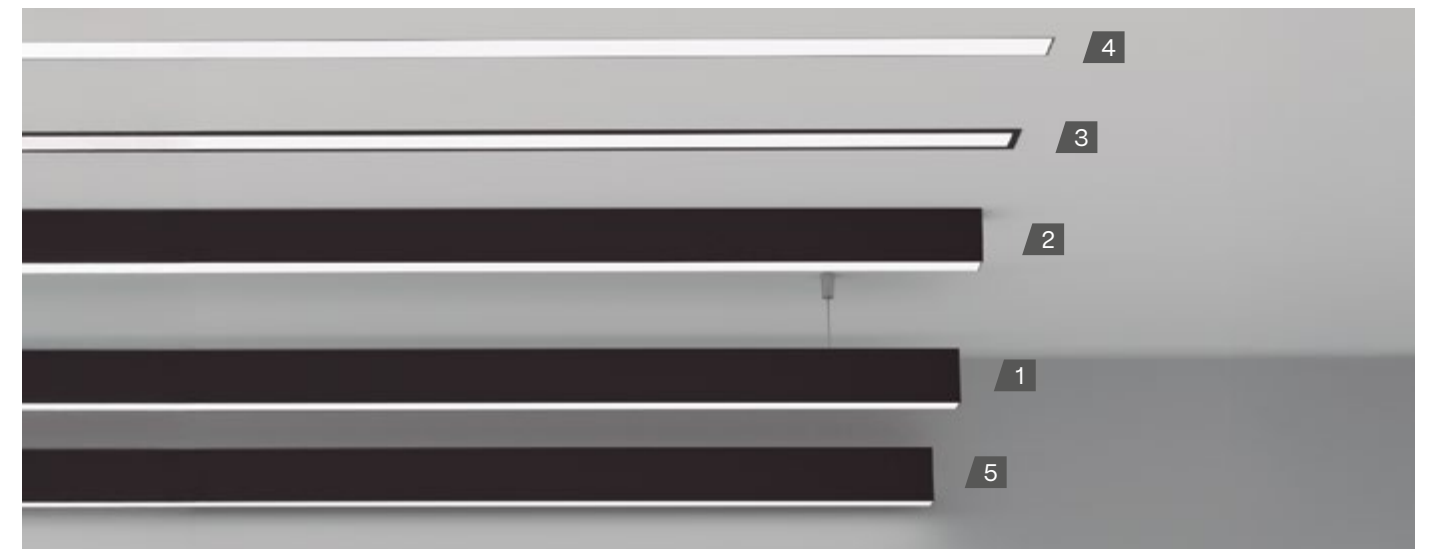


1. PENDANT – PENDANT UP LIGHT

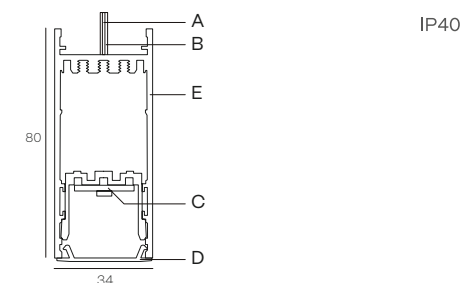


2. SURFACE

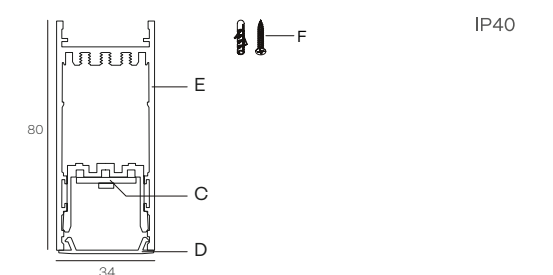


3. RECESSED WITH FRAME

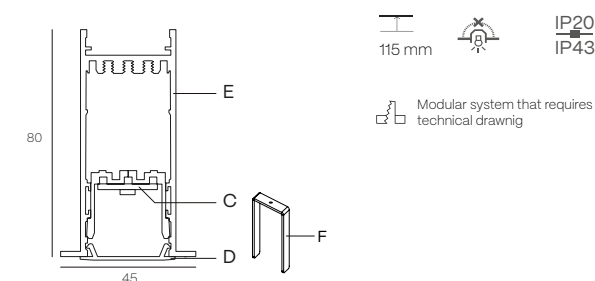

4. TRIMLESS

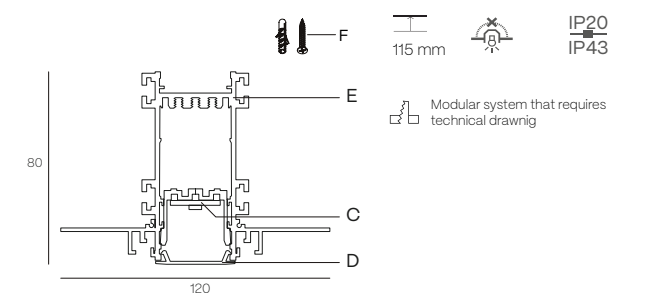

5. WALL SURFACE

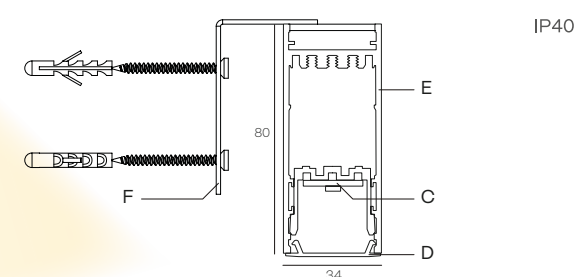

Compatible only with electric system
lengths (mm): 281 · 422 · 562
See page 194
Example: **253EB2** **112**


ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

A – Aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser


E – Aluminium profile
F – Mounting kit

Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material

COMPONENTS

COVER KIT	REFERENCE
	TF23  2 × 3 mm

BOXES FOR PENDANT – Not included, please select

CONNECTION BOX	REFERENCE
	CB09.12 

JOINTS

LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT	T - JOINT	CROSS JOINT
				
UR23 	UL23 	UV23 	UT23 	UC23 

✂️ INSTALLATION			🔧 ON DEMAND OPTIONS		
1 · Pendant	6 · Trimless	FINISH B · Black W · White S · Special color	 Special finishes	 Custom dimensions	 Tunable white
2 · Pendant up light	7 · Wall surface		 Emergency lighting	 Motion detection	 Up light
3 · Surface					
5 · Recessed with frame					

TECHNICAL INFORMATION


POWER STANDARD

		843	1124	1405	1686	1967	2248
 24 V		4 W 387 – 405 – 425 lm	6 W 622 – 634 – 666 lm	8 W 824 – 840 – 882 lm	10 W 1034 – 1054 – 1107 lm	12 W 1243 – 1268 – 1331 lm	14 W 1460 – 1490 – 1564 lm
	 500 mA	17 W 2454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm	33 W 4908 – 5814 – 6258 lm	39 W 5726 – 6783 – 7301 lm	45 W 6544 – 7752 – 8344 lm
	Opal	2700 K 253EH  112 	253EJ  112 	253EL  112 	253EN  112 	253EP  112 	253ER  112 
	3000 K	253EH  113 	253EJ  113 	253EL  113 	253EN  113 	253EP  113 	253ER  113 
	4000 K	253EH  115 	253EJ  115 	253EL  115 	253EN  115 	253EP  115 	253ER  115 
Microprismatic	2700 K	253EH  122 	253EJ  122 	253EL  122 	253EN  122 	253EP  122 	253ER  122 
	3000 K	253EH  123 	253EJ  123 	253EL  123 	253EN  123 	253EP  123 	253ER  123 
	4000 K	253EH  125 	253EJ  125 	253EL  125 	253EN  125 	253EP  125 	253ER  125 

POWER HIGH

		843	1124	1405	1686	1967	2248
 24 V		8 W 643 – 683 – 722 lm	12 W 1007 – 1069 – 1131 lm	16 W 1334 – 1417 – 1500 lm	20 W 1674 – 1777 – 1881 lm	24 W 2014 – 2138 – 2263 lm	28 W 2366 – 2512 – 2658 lm
	 500 mA	33 W 4908 – 5814 – 6258 lm	45 W 6544 – 7752 – 8344 lm	56 W 8180 – 9690 – 10430 lm	67 W 9816 – 11628 – 12516 lm	78 W 11452 – 13566 – 14602 lm	89 W 13088 – 15504 – 16688 lm
	Opal	2700 K 253EH  312 	253EJ  312 	253EL  312 	253EN  312 	253EP  312 	253ER  312 
	3000 K	253EH  313 	253EJ  313 	253EL  313 	253EN  313 	253EP  313 	253ER  313 
	4000 K	253EH  315 	253EJ  315 	253EL  315 	253EN  315 	253EP  315 	253ER  315 
Microprismatic	2700 K	253EH  322 	253EJ  322 	253EL  322 	253EN  322 	253EP  322 	253ER  322 
	3000 K	253EH  323 	253EJ  323 	253EL  323 	253EN  323 	253EP  323 	253ER  323 
	4000 K	253EH  325 	253EJ  325 	253EL  325 	253EN  325 	253EP  325 	253ER  325 

The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

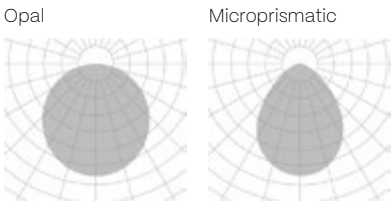

The data shown corresponds to raw values.

✂️ INSTALLATION	🏠 FINISH	⚡ DIMM OPTIONS	 Up light  Down light
1 · Pendant 2 · Pendant up light 3 · Surface 5 · Recessed with frame 6 · Trimless 7 · Wall surface	B · Black W · White S · Special color	O · On-Off D · Dali P · Push V · 1.10v	

ALBA MINI MODULIGHT



LIGHT MODULES



1. MINI TUBE

IP40

350°

90°

75

Ø40

100

150

75

Ø40

6 W

886 - 898 - 939 lm

283EB9 122

283EB9 123

283EB9 125

283EB9 132

283EB9 133

283EB9 135

283EB9 152

283EB9 153

283EB9 155

283EE9 122

283EE9 123

283EE9 125

283EE9 132

283EE9 133

283EE9 135

283EE9 152

283EE9 153

283EE9 155

15°

24°

38°

The data shown corresponds to raw values.

FINISH

B · Black

W · White

DIMM OPTIONS

O · On-Off

D · Dali

P · Push


V · 1.10v

Down light

LIGHT MODULES

2. LENSES– Available with round or square trim

IP40					
Dimension		29 mm	80 mm	133 mm	263 mm
	700 mA	2 W 189 – 216 – 232 lm	6 W 566 – 647 – 697 lm	10 W 982 – 1079 – 1161 lm	20 W 1885 – 2158 – 2322 lm
20°	2700 K	28 EB9 132	28 EH9 132	28 EL9 132	28 EJ9 132
	3000 K	28 EB9 133	28 EH9 133	28 EL9 133	28 EJ9 133
	4000 K	28 EB9 135	28 EH9 135	28 EL9 135	28 EJ9 135
40°	2700 K	28 EB9 152	28 EH9 152	28 EL9 152	28 EJ9 152
	3000 K	28 EB9 153	28 EH9 153	28 EL9 153	28 EJ9 153
	4000 K	28 EB9 155	28 EH9 155	28 EL9 155	28 EJ9 155
60°	2700 K	28 EB9 172	28 EH9 172	28 EL9 172	28 EJ9 172
	3000 K	28 EB9 173	28 EH9 173	28 EL9 173	28 EJ9 173
	4000 K	28 EB9 175	28 EH9 175	28 EL9 175	28 EJ9 175

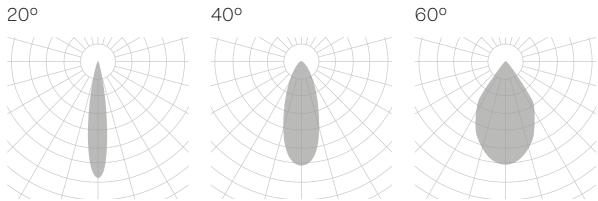

The data shown corresponds to raw values.

- FINISH**

 - 2 · Round trim
 - 4 · Square trim
- FINISH**

 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**


 - O · On–Off
 - D · Dali
 - P · Push
- Down light

LIGHT MODULES

3. LED MODULES

IP40					
Dimension		281 mm	562 mm	843 mm	
	700 mA	12 W 1120 – 1173 – 1225 lm	24 W 2240 – 2346 – 2450 lm	36 W 3360 – 3519 – 3675 lm	
Opal	2700 K	281EB9 312O	281EE9 312O	281EH9 312O	
	3000 K	281EB9 313O	281EE9 313O	281EH9 313O	
	4000 K	281EB9 315O	281EE9 315O	281EH9 315O	
Microprismatic	2700 K	281EB9 322O	281EE9 322O	281EH9 322O	
	3000 K	281EB9 323O	281EE9 323O	281EH9 323O	
	4000 K	281EB9 325O	281EE9 325O	281EH9 325O	

IP40					
Dimension		1124 mm	1405 mm	1686 mm	
	700 mA	48 W 4480 – 4692 – 4900 lm	60 W 5600 – 5865 – 6125 lm	72 W 6720 – 7038 – 7350 lm	
Opal	2700 K	281EJ9 312O	281EL9 312O	281EN9 312O	
	3000 K	281EJ9 313O	281EL9 313O	281EN9 313O	
	4000 K	281EJ9 315O	281EL9 315O	281EN9 315O	
Microprismatic	2700 K	281EJ9 322O	281EL9 322O	281EN9 322O	
	3000 K	281EJ9 323O	281EL9 323O	281EN9 323O	
	4000 K	281EJ9 325O	281EL9 325O	281EN9 325O	

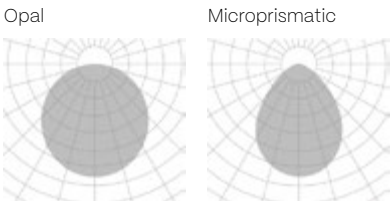


The data shown corresponds to raw values.

- FINISH**


 - B · Black
 - W · White
 - S · Special color
- Down light

PROFILES


PENDANT

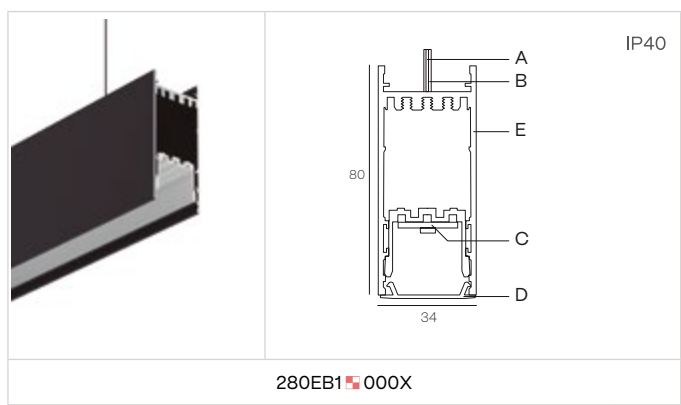


SURFACE

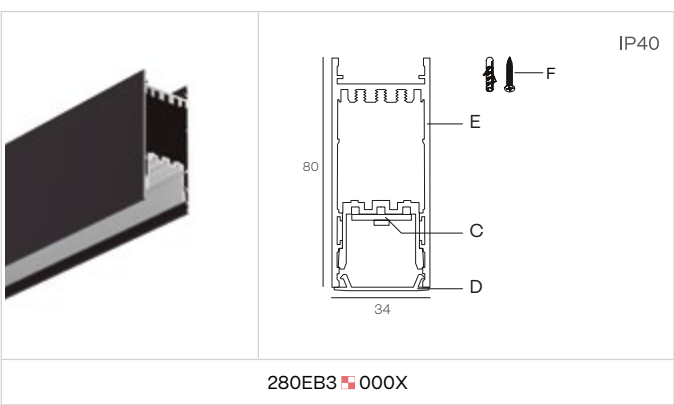

RECESSED WITH FRAME

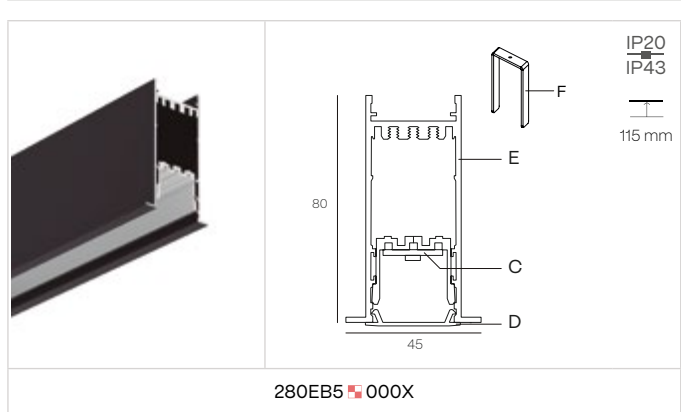


TRIMLESS

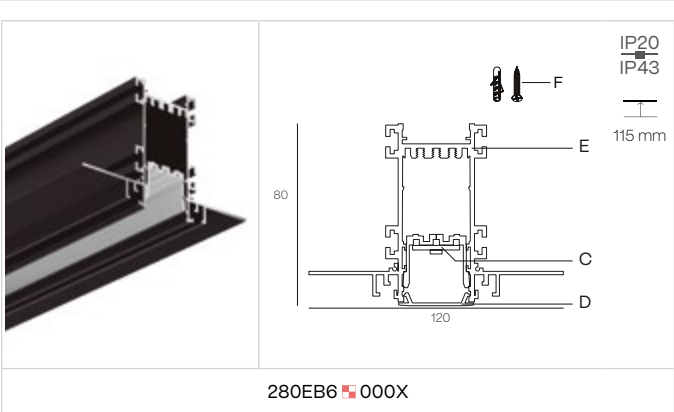

Total length = profile length + 2 x 2 mm (cover kit)
(Total length + 2 mm) x 30 mm

Total length = profile length + 2 x 2 mm (cover kit)
(Total length + 2 mm) x 30 mm

WALL SURFACE

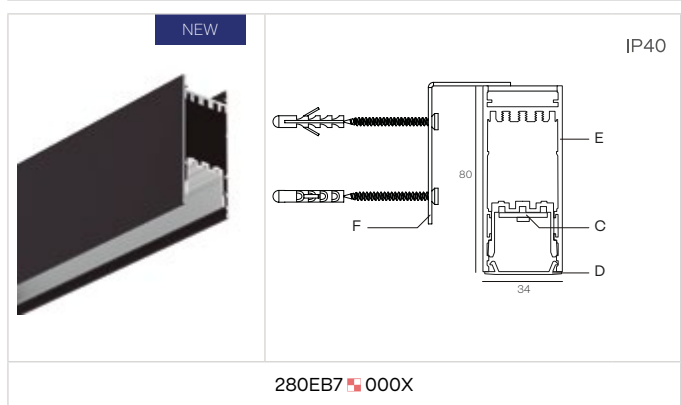

A - Aircraft cable (3 m)
B - Power cable
E - Aluminium profile
F - Mounting kit

FINISH
B - Black
W - White
S - Special color

ON DEMAND OPTIONS
Special finishes
Custom dimensions
Emergency lighting
Motion detection
Tunable white
Up light


COMPONENTS

GENERAL COMPONENTS




DIMENSION		DRIVER
.01	0 - 15 W	DR10210.01
.02	16 - 30 W	DR10210.02
.03	31 - 65 W	DR10210.03
.04	66 - 90 W	DR10210.04

BOXES FOR PENDANT - Not included, please select



JOINTS

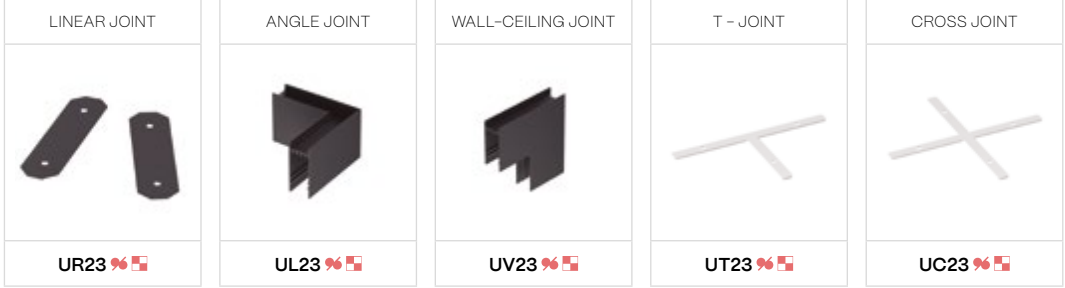


INSTALLATION
1 - Pendant
3 - Surface
5 - Recessed with frame
6 - Trimless
7 - Wall surface

FINISH
B - Black
W - White
S - Special color

DIMM OPTIONS
O - On-Off
D - Dali
P - Push
V - 1.10v


ALBA WING

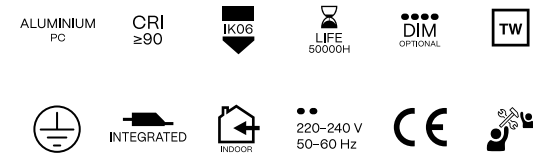


INSTALLATION




1. PENDANT - PENDANT UP LIGHT

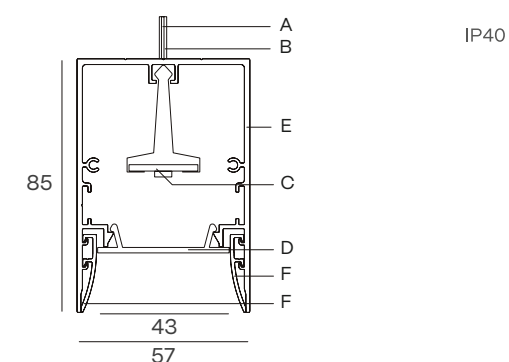


2. SURFACE

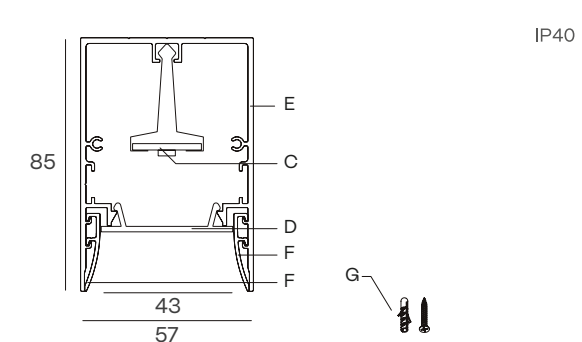

3. RECESSED WITH FRAME

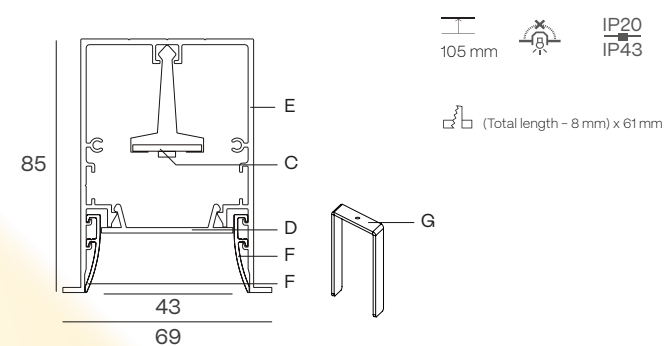

4. TRIMLESS

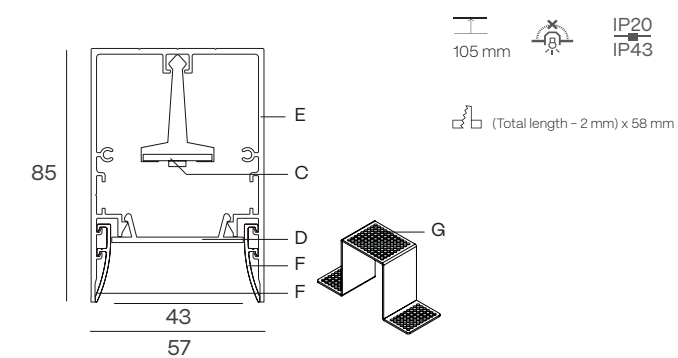

ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

A - Aircraft Cable (3 m)
B - Power cable
C - LED module
D - Diffuser


E - Aluminium profile
F - Paintable bezel
G - Mounting Kit

□ Cut hole
— Minimum height of the false ceiling
⊕ Luminaire not suitable to be covered with thermal insulating material



COMPONENTS

COVER KIT	REFERENCE
	TF13  2 × 3 mm

BOXES FOR PENDANT Not included, please select

CONNECTION BOX	REFERENCE
	CB09.12 

OTHER PENDANT OPTIONS

2 SUSPENSION ROD	DIMENSION	REFERENCE	SUSPENSION KIT	DIMENSION	REFERENCE
	60 mm	SC21.60 		5 m	SC05.SA
	80 mm	SC21.80 		7 m	SC07.SA
	100 mm	SC100.60 		10 m	SC10.SA

JOINTS

LINEAR JOINT

UR13

 **INSTALLATION**

- 1 · Pendant
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless

 **FINISH**

- B** · Black
- W** · White
- S** · Special color

 **ON DEMAND OPTIONS**

 Special finishes

 Special color temperatures

 RGB

 Emergency lighting

 Motion detection

 Wireless control options

 CRI 80

TECHNICAL INFORMATION


POWER STANDARD

		843	1124	1405	1686	1967	2248
	24 V	4 W 387 – 405 – 425 lm	6 W 622 – 634 – 666 lm	8 W 824 – 840 – 882 lm	10 W 1034 – 1054 – 1107 lm	12 W 1243 – 1268 – 1331 lm	14 W 1460 – 1490 – 1564 lm
	500 mA	17 W 2454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm	33 W 4908 – 5814 – 6258 lm	39 W 5726 – 6783 – 7301 lm	45 W 6544 – 7752 – 8344 lm
Opal	2700 K	290EH  112 	290EJ  112 	290EL  112 	290EN  112 	290EP  112 	290ER  112 
	3000 K	290EH  113 	290EJ  113 	290EL  113 	290EN  113 	290EP  113 	290ER  113 
	4000 K	290EH  115 	290EJ  115 	290EL  115 	290EN  115 	290EP  115 	290ER  115 
Microprismatic	2700 K	290EH  122 	290EJ  122 	290EL  122 	290EN  122 	290EP  122 	290ER  122 
	3000 K	290EH  123 	290EJ  123 	290EL  123 	290EN  123 	290EP  123 	290ER  123 
	4000 K	290EH  125 	290EJ  125 	290EL  125 	290EN  125 	290EP  125 	290ER  125 

POWER HIGH

		843	1124	1405	1686	1967	2248
	24 V	8 W 643 – 683 – 722 lm	12 W 1007 – 1069 – 1131 lm	16 W 1334 – 1417 – 1500 lm	20 W 1674 – 1777 – 1881 lm	24 W 2014 – 2138 – 2263 lm	28 W 2366 – 2512 – 2658 lm
	500 mA	33 W 4908 – 5814 – 6258 lm	45 W 6544 – 7752 – 8344 lm	56 W 8180 – 9690 – 10430 lm	67 W 9816 – 11628 – 12516 lm	78 W 11452 – 13566 – 14602 lm	89 W 13088 – 15504 – 16688 lm
Opal	2700 K	290EH  312 	290EJ  312 	290EL  312 	290EN  312 	290EP  312 	290ER  312 
	3000 K	290EH  313 	290EJ  313 	290EL  313 	290EN  313 	290EP  313 	290ER  313 
	4000 K	290EH  315 	290EJ  315 	290EL  315 	290EN  315 	290EP  315 	290ER  315 
Microprismatic	2700 K	290EH  322 	290EJ  322 	290EL  322 	290EN  322 	290EP  322 	290ER  322 
	3000 K	290EH  323 	290EJ  323 	290EL  323 	290EN  323 	290EP  323 	290ER  323 
	4000 K	290EH  325 	290EJ  325 	290EL  325 	290EN  325 	290EP  325 	290ER  325 

The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

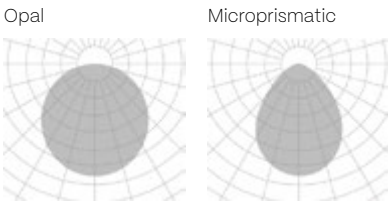

The data shown corresponds to raw values.

 **INSTALLATION**

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless

 **FINISH**

- B** · Black
- W** · White
- S** · Special color
- G** · Black – white
- H** · White – black

 **DIMM OPTIONS**


- O** · On–Off
- D** · Dali
- P** · Push
- V** · 1.10v

 Up light


 Down light

ALBA PRO

NEW

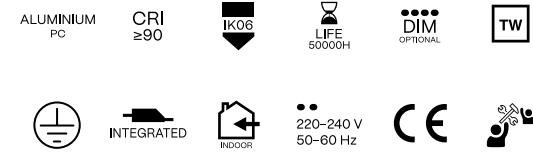


LIGHT MODULES – Configurable luminaire

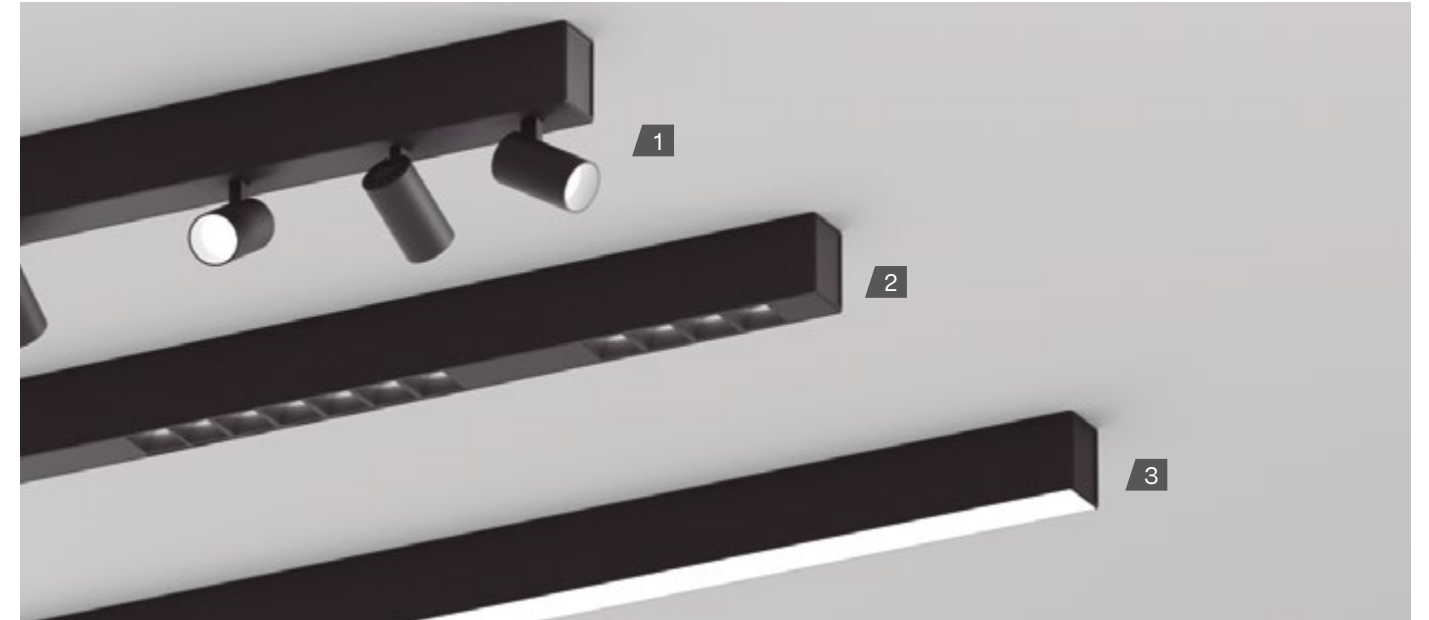

1. SPOTLIGHT

IP40
350°
90°




		POWER STANDARD	POWER HIGH
	700 mA	6 W 878 – 889 – 930 lm	6 W 886 – 898 – 939 lm
15°	2700 K	260EX9 ■ 122X	260EX9 ■ 322X
	3000 K	260EX9 ■ 123X	260EX9 ■ 323X
	4000 K	260EX9 ■ 125X	260EX9 ■ 325X
24°	2700 K	260EX9 ■ 132X	260EX9 ■ 332X
	3000 K	260EX9 ■ 133X	260EX9 ■ 333X
	4000 K	260EX9 ■ 135X	260EX9 ■ 335X
38°	2700 K	260EX9 ■ 152X	260EX9 ■ 352X
	3000 K	260EX9 ■ 153X	260EX9 ■ 353X
	4000 K	260EX9 ■ 155X	260EX9 ■ 355X


15°



24°



38°




The data shown corresponds to raw values.

Down light

FINISH
B · Black
W · White

1. SPOTLIGHT STICK

IP40
350°
90°



		POWER STANDARD	POWER HIGH
	700 mA	6 W 878 – 889 – 930 lm	6 W 886 – 898 – 939 lm
15°	2700 K	261EX9 ■ 122X	261EX9 ■ 322X
	3000 K	261EX9 ■ 123X	261EX9 ■ 323X
	4000 K	261EX9 ■ 125X	261EX9 ■ 325X
24°	2700 K	261EX9 ■ 132X	261EX9 ■ 332X
	3000 K	261EX9 ■ 133X	261EX9 ■ 333X
	4000 K	261EX9 ■ 135X	261EX9 ■ 335X
38°	2700 K	261EX9 ■ 152X	261EX9 ■ 352X
	3000 K	261EX9 ■ 153X	261EX9 ■ 353X
	4000 K	261EX9 ■ 155X	261EX9 ■ 355X

LIGHT MODULES – Configurable luminaire

2. MODULE LENSES – POWER STANDARD

IP40			
Dimension		160 mm	280 mm
65°	350 mA	4 W 575 – 600 – 625 lm	7 W 1000 – 1050 – 1055 lm
	2700 K	257EX9 172X	258EX9 172X
	3000 K	257EX9 173X	258EX9 173X
	4000 K	257EX9 175X	258EX9 175X
90°	2700 K	257EX9 172X	258EX9 172X
	3000 K	257EX9 173X	258EX9 173X
	4000 K	257EX9 175X	258EX9 175X
Asymetric	2700 K	257EX9 142X	258EX9 142X
	3000 K	257EX9 143X	258EX9 143X
	4000 K	257EX9 155X	258EX9 155X

2. MODULE LENSES – POWER HIGH


IP40			
Dimension		160 mm	280 mm
65°	700 mA	8 W 1115 – 1165 – 1220 lm	14 W 1950 – 2040 – 2050 lm
	2700 K	257EX9 372X	258EX9 372X
	3000 K	257EX9 373X	258EX9 373X
	4000 K	257EX9 375X	258EX9 375X
90°	2700 K	257EX9 372X	258EX9 372X
	3000 K	257EX9 373X	258EX9 373X
	4000 K	257EX9 375X	258EX9 375X
Asymetric	2700 K	257EX9 342X	258EX9 342X
	3000 K	257EX9 343X	258EX9 343X
	4000 K	257EX9 355X	258EX9 355X

3. MODULE LIGHT – POWER STANDARD

IP40			
		Opal	Microprismatic
Dimension		280 mm	280 mm
Power standard	350 mA	8 W 1178 – 1388 – 1493 lm	8 W 1178 – 1388 – 1493 lm
	2700 K	259EX9W112X	259EX9W122X
	3000 K	259EX9W113X	259EX9W123X
	4000 K	259EX9W115X	259EX9W125X

3. MODULE LIGHT – POWER HIGH

IP40			
		Opal	Microprismatic
Dimension		280 mm	280 mm
Power high	700 mA	16 W 2213 – 2664 – 2866 lm	16 W 2213 – 2664 – 2866 lm
	2700 K	259EX9W312X	259EX9W322X
	3000 K	259EX9W313X	259EX9W323X
	4000 K	259EX9W315X	259EX9W325X

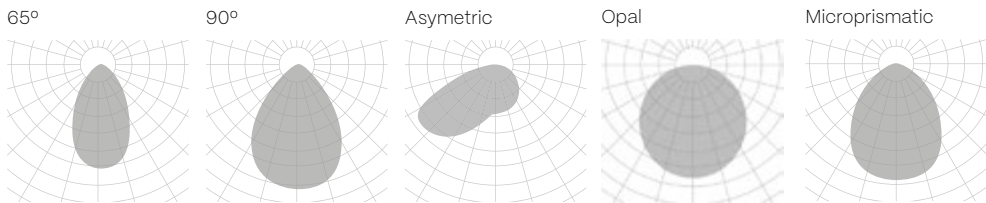

The data shown corresponds to raw values.

- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v

Down light

PROFILES, UP LIGHT & COMPONENTS – Configurable luminaire

PENDANT PENDANT UP LIGHT	SURFACE	RECESSED WITH FRAME	TRIMLESS	WALL SURFACE	TRACK
IP40	IP40	IP20 IP43	IP20 IP43	IP40	IP40
A255PB1XXX	A255PB3XXX	A255PB5XXX	A255PB6XXX	A255PB7XXX	A255PB9XXX
A255PB2XXX					

UP LIGHT ON DEMAND

Dimension	Per meter
24 V	13 W 908 – 950 – 1020 lm
2700 K	A255EB2STXX
3000 K	A255EB3STXX
4000 K	A255EB5STXX

COMPONENTS

COVER KIT		OPAQUE	COVER KIT
Pendant	A255CB1XXX		
Surface	A255CB3XXX		
Recessed with frame	A255CB5XXX		
Trimless	A255CB6XXX	A255PBXXXX	A255CB XXX

ALBA PRO DRIVER FOR CUSTOM PRODUCT – POWER STANDARD – 350 mA	
* 4 W	* DR10163.01.ST.
8 to 16 W	DR10163.02.ST.
20 to 36 W	DR10163.03.ST.
40 to 68 W	DR10163.04.ST.
72 to 76 W	DR10163.05.ST.

*This driver only works with one 160 mm Module Lenses unit, 4 W, standard power.

ALBA PRO DRIVER FOR CUSTOM PRODUCT – POWER HIGH – 700 mA	
* 8 W	* DR10163.01.HI.
16 W	DR10163.02.HI.
24 to 32 W	DR10163.03.HI.
40 to 64 W	DR10163.04.HI.
72 to 88 W	DR10163.05.HI.

*This driver only works with one 160 mm Module Lenses unit, 8 W, high power.

- FINISH**
 - B · Black
 - W · White
 - S · Special color
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v

Up light
 Down light

RECESSED WITH FRAME:
Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 3 mm (Cover Kit)
(Total length – 8 mm) x 51 mm

TRIMLESS:
Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 2 mm (Cover Kit)
(Total length + 2 mm) x 65 mm

TECHNICAL INFORMATION – Closed luminaire



POWER STANDARD – Closed luminaire

		843	1124	1405
	24 V	4 W 387 – 405 – 425 lm	6 W 622 – 634 – 666 lm	8 W 824 – 840 – 882 lm
	500 mA	17 W 1454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm
Opal	2700 K	255EH  112 	255EJ  112 	255EL  112 
	3000 K	255EH  113 	255EJ  113 	255EL  113 
	4000 K	255EH  115 	255EJ  115 	255EL  115 
Microprismatic	2700 K	255EH  122 	255EJ  122 	255EL  122 
	3000 K	255EH  123 	255EJ  123 	255EL  123 
	4000 K	255EH  125 	255EJ  125 	255EL  125 

The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

Closed luminaire with 4 opaques and 3 lens modules

		POWER STANDARD	POWER HIGH
		1100 mm (PN/SR) · 1110 mm (RF) · 1098 mm (TR)	
	24 V per meter	8 W 622 – 634 – 666 lm	8 W 1007 – 1069 – 1131 lm
		350 mA · 12 W 1725 – 1800 – 1875 lm	700 mA · 24 W 3345 – 3495 – 3660 lm
65°	2700 K	256EX  172 	256EX  372 
	3000 K	256EX  173 	256EX  373 
	4000 K	256EX  175 	256EX  375 

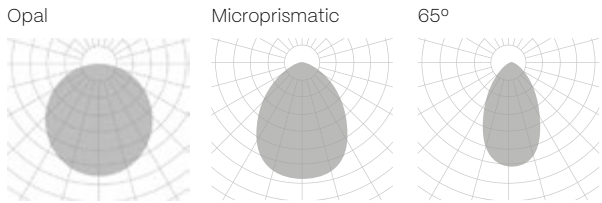

The data shown corresponds to raw values.

-  **INSTALLATION**

 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 5 · Recessed with frame
-  **FINISH**


 - 6 · Trimless
 - 7 · Wall surface
 - 9 · Track
-  **FINISH**

 - B · Black
 - W · White
 - S · Special color
-  **DIMM OPTIONS**

 - O · On-Off
 - D · Dali
 - P · Push
 - V · 110v
-  Down light



COMPONENTS – Configurable & closed luminaire

COMPONENTS

CONNECTION BOX FOR PENDANT

CB09.12 

Not included, please select

OTHER PENDANT OPTIONS

2 SUSPENSION ROD	DIMENSION	REFERENCE	SUSPENSION KIT	DIMENSION	REFERENCE
	60 mm	SC21.60 		5 m	SC05.SA
	80 mm	SC21.80 		7 m	SC07.SA
	100 mm	SC100.60 		10 m	SC10.SA

JOINTS

LINEAR JOINT	ANGLE JOINT	CROSS JOINT	WALL-CEILING JOINT	T- JOINT
				
A255JB1XXXW	A255JE  XXX 	A255JJ  XXX 	A255LL  XXX 	A255JH  XXX 

-  **INSTALLATION**


 - 1 · Pendant
 - 2 · Pendant up light
 - 3 · Surface
 - 5 · Recessed with frame
-  **FINISH**

 - 6 · Trimless
 - 7 · Wall surface
 - 9 · Track
-  **FINISH**

 - B · Black
 - W · White
 - S · Special color
-  **ON DEMAND OPTIONS**

 -  Special finishes
 -  Special color temperatures
 -  Custom dimensions
 -  CRI 80
 -  Emergency lighting
 -  Motion detection
 -  Wireless control options
 -  RGB


ALBA PLUS

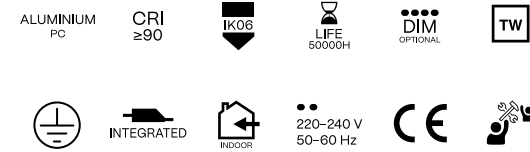


INSTALLATION




1. PENDANT – PENDANT UP LIGHT

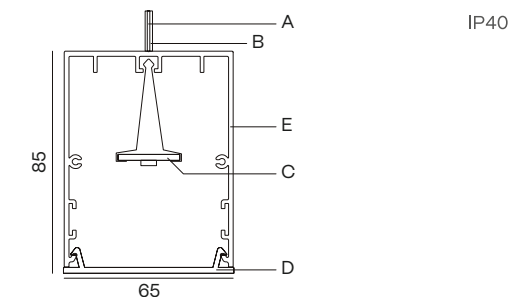


2. SURFACE

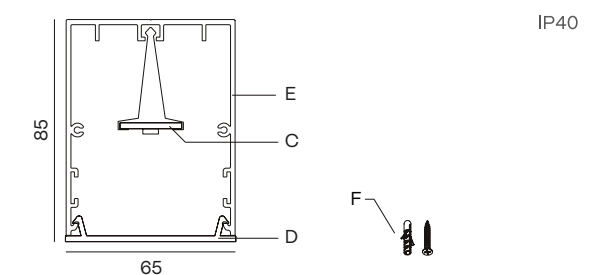


3. RECESSED WITH FRAME

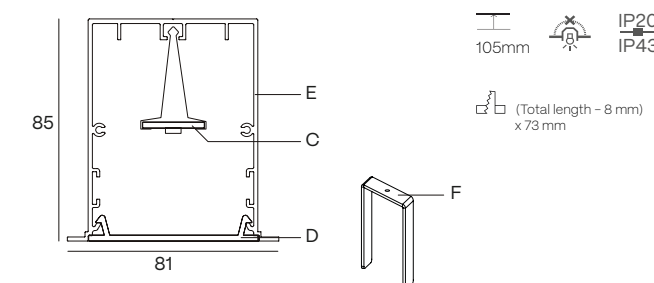

4. TRIMLESS

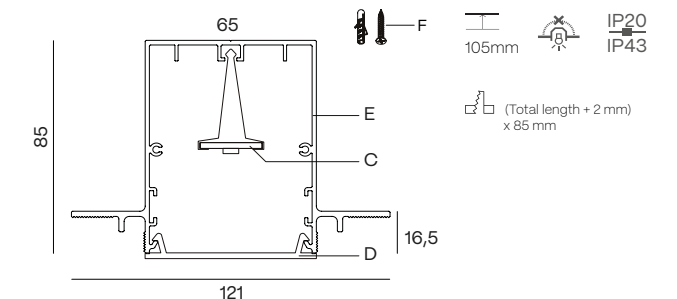

5. TRACKLIGHT

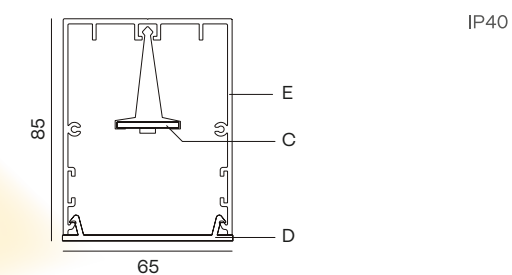


ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194


A – Aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser
E – Aluminium profile
F – Mounting kit

□ Cut hole
— Minimum height of the false ceiling
⚠ Luminaire not suitable to be covered with thermal insulating material



COMPONENTS

COVER KIT	REFERENCE	ALBA PLUS ASYMETRIC ACCESORY	REFERENCE
	TF12  2 x 3 mm		A254PBXXX 

BOX FOR PENDANT Not included, please select

CONNECTION BOX	REFERENCE
	CB09.12 

OTHER PENDANT OPTIONS

2 SUSPENSION ROD	DIMENSION	REFERENCE	SUSPENSION KIT	DIMENSION	REFERENCE
	60 mm	SC21.60 		5 m	SC05.SA
	80 mm	SC21.80 		7 m	SC07.SA
	100 mm	SC100.60 		10 m	SC10.SA

JOINTS

LINEAR JOINT	ANGLE JOINT	T - JOINT	T - JOINT
			
UR01	UL01 	UT01 	UC01 

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless
- 9 · Track

FINISH

- B · Black
- W · White
- S · Special color

ON DEMAND OPTIONS

-  Special finishes
-  Special color temperatures
-  Custom dimensions
-  CRI 80
-  Emergency lighting
-  Motion detection
-  Wireless control options
-  RGB

TECHNICAL INFORMATION


POWER STANDARD

		843	1124	1405	1686	1967	2248
	24 V	4 W 387 – 405 – 425 lm	6 W 622 – 634 – 666 lm	8 W 824 – 840 – 882 lm	10 W 1034 – 1054 – 1107 lm	12 W 1243 – 1268 – 1331 lm	14 W 1460 – 1490 – 1564 lm
	500 mA	17 W 2454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm	33 W 4908 – 5814 – 6258 lm	39 W 5726 – 6783 – 7301 lm	45 W 6544 – 7752 – 8344 lm
Opal	2700 K	254EH  112 	254EJ  112 	254EL  112 	254EN  112 	254EP  112 	254ER  112 
	3000 K	254EH  113 	254EJ  113 	254EL  113 	254EN  113 	254EP  113 	254ER  113 
	4000 K	254EH  115 	254EJ  115 	254EL  115 	254EN  115 	254EP  115 	254ER  115 
Microprismatic	2700 K	254EH  122 	254EJ  122 	254EL  122 	254EN  122 	254EP  122 	254ER  122 
	3000 K	254EH  123 	254EJ  123 	254EL  123 	254EN  123 	254EP  123 	254ER  123 
	4000 K	254EH  125 	254EJ  125 	254EL  125 	254EN  125 	254EP  125 	254ER  125 

POWER HIGH

		843	1124	1405	1686	1967	2248
	24 V	8 W 643 – 683 – 722 lm	12 W 1007 – 1069 – 1131 lm	16 W 1334 – 1417 – 1500 lm	20 W 1674 – 1777 – 1881 lm	24 W 2014 – 2138 – 2263 lm	28 W 2366 – 2512 – 2658 lm
	500 mA	33 W 4908 – 5814 – 6258 lm	45 W 6544 – 7752 – 8344 lm	56 W 8180 – 9690 – 10430 lm	67 W 9816 – 11628 – 12516 lm	78 W 11452 – 13566 – 14602 lm	89 W 13088 – 15504 – 16688 lm
Opal	2700 K	254EH  312 	254EJ  312 	254EL  312 	254EN  312 	254EP  312 	254ER  312 
	3000 K	254EH  313 	254EJ  313 	254EL  313 	254EN  313 	254EP  313 	254ER  313 
	4000 K	254EH  315 	254EJ  315 	254EL  315 	254EN  315 	254EP  315 	254ER  315 
Microprismatic	2700 K	254EH  322 	254EJ  322 	254EL  322 	254EN  322 	254EP  322 	254ER  322 
	3000 K	254EH  323 	254EJ  323 	254EL  323 	254EN  323 	254EP  323 	254ER  323 
	4000 K	254EH  325 	254EJ  325 	254EL  325 	254EN  325 	254EP  325 	254ER  325 

The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

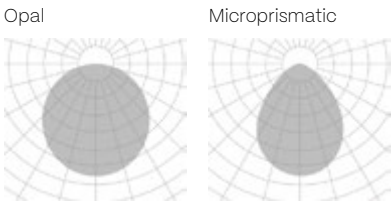

The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
- 2 · Pendant up light
- 3 · Surface
- 5 · Recessed with frame
- 6 · Trimless
- 9 · Track

FINISH


- B · Black
- W · White
- S · Special color

DIMM OPTIONS


- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

-  Up light
-  Down light


ALBA DOUBLE

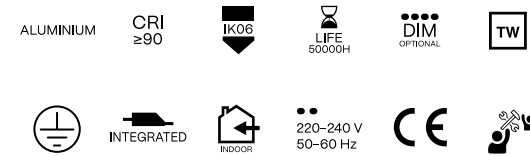

INSTALLATION

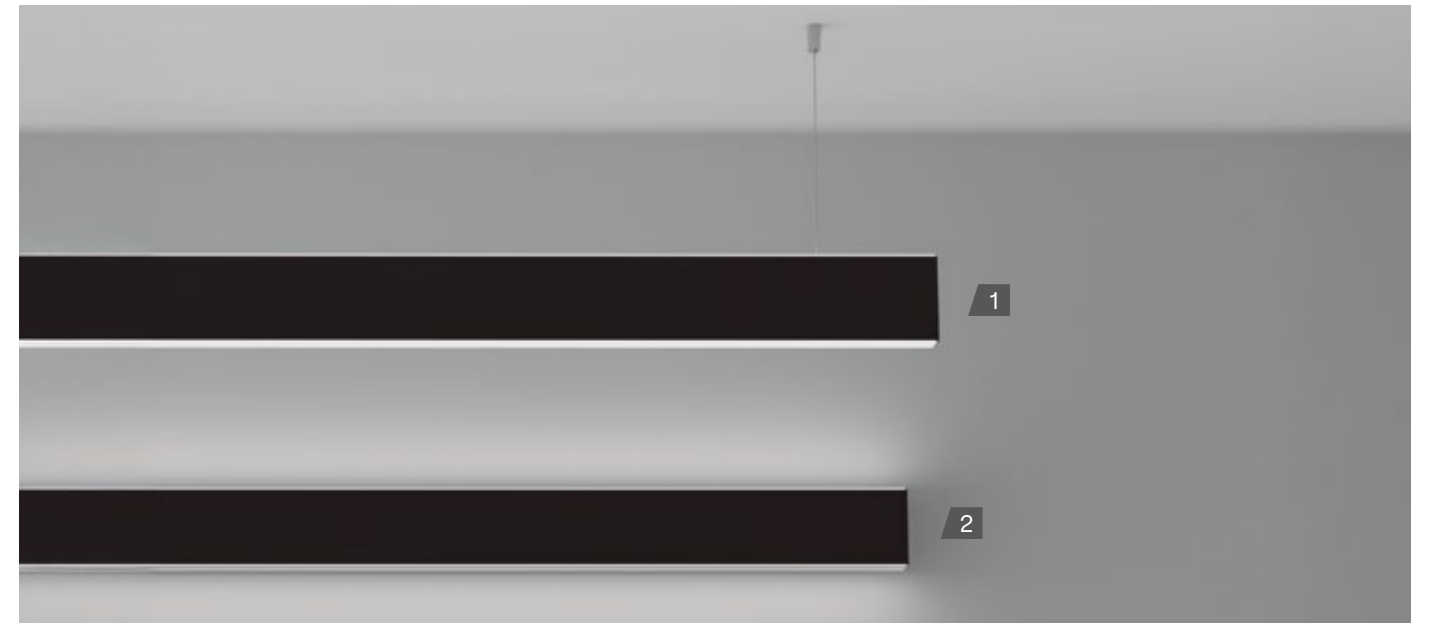


1. PENDANT UP & DOWN LIGHT



IP40

2. WALL SURFACE UP & DOWN LIGHT

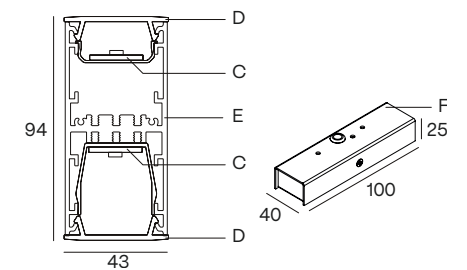

IP40

Compatible only with electric system lengths (mm): 281 · 422 · 562.


ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

- A – Aircraft cable (3 m)
- B – Power cable
- C – LED module
- D – Diffuser
- E – Aluminium profile
- F – Connection box


COMPONENTS

COVER KIT	REFERENCE
	TF04  2 x 3 mm

BOX FOR PENDANT – Not included, please select

CONNECTION BOX	REFERENCE
	CB09.12 

OTHER PENDANT OPTIONS

SUSPENSION KIT	DIMENSION	REFERENCE	2 SUSPENSION ROD	DIMENSION	REFERENCE
	5 m	SC05.SA		60 mm	SC21.60 
	7 m	SC07.SA		80 mm	SC21.80 
	10 m	SC10.SA		100 mm	SC100.60 

JOINTS

LINEAR JOINT

UR04

 **FINISH**
B · Black
W · White
S · Special color

 **ON DEMAND OPTIONS**

 Special finishes

 Special color temperatures

 Hi power

 CRI 80

 Emergency lighting

 Motion detection

 Wireless control options

 Custom dimensions

 RGB

TECHNICAL INFORMATION


POWER STANDARD – PENDANT UP & DOWN LIGHT

		843	1124	1405	1686	1967	2248
	500 mA	17 W 1454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm	33 W 4908 – 5814 – 6258 lm	39 W 5726 – 6783 – 7301 lm	45 W 6544 – 7752 – 8344 lm
	500 mA	17 W 2454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm	33 W 4908 – 5814 – 6258 lm	39 W 5726 – 6783 – 7301 lm	45 W 6544 – 7752 – 8344 lm
Opal	2700 K	250EH2  112 	250EJ2  112 	250EL2  112 	250EN2  112 	250EP2  112 	250ER2  112 
	3000 K	250EH2  113 	250EJ2  113 	250EL2  113 	250EN2  113 	250EP2  113 	250ER2  113 
	4000 K	250EH2  115 	250EJ2  115 	250EL2  115 	250EN2  115 	250EP2  115 	250ER2  115 
Microprismatic	2700 K	250EH2  122 	250EJ2  122 	250EL2  122 	250EN2  122 	250EP2  122 	250ER2  122 
	3000 K	250EH2  123 	250EJ2  123 	250EL2  123 	250EN2  123 	250EP2  123 	250ER2  123 
	4000 K	250EH2  125 	250EJ2  125 	250EL2  125 	250EN2  125 	250EP2  125 	250ER2  125 

The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

POWER STANDARD – WALL SURFACE UP & DOWN LIGHT

		281	422	562
	500 mA	6 W 765 – 795 – 825 lm	9 W 1148 – 1193 – 1238 lm	12 W 1530 – 1590 – 1650 lm
	500 mA	6 W 818 – 969 – 1043 lm	9 W 1227 – 1454 – 1565 lm	12 W 1636 – 1938 – 2086 lm
Opal	2700 K	250EB8  112 	250EC8  112 	250EE8  112 
	3000 K	250EB8  113 	250EC8  113 	250EE8  113 
	4000 K	250EB8  115 	250EC8  115 	250EE8  115 
Microprismatic	2700 K	250EB8  122 	250EC8  122 	250EE8  122 
	3000 K	250EB8  123 	250EC8  123 	250EE8  123 
	4000 K	250EB8  125 	250EC8  125 	250EE8  125 

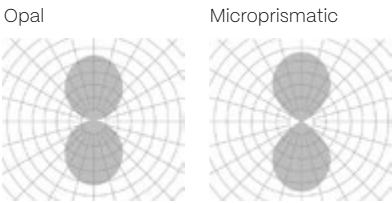


The data shown corresponds to raw values.

 **FINISH**
B · Black
W · White
S · Special color

 **DIMM OPTIONS**
O · On–Off
D · Dali
P · Push
V · 1.10v

 Up light
 Down light

ALBA LINGGO MINI

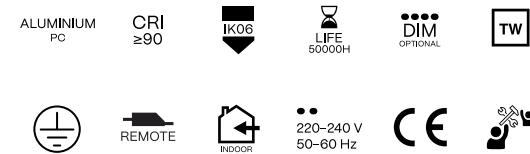


INSTALLATION




1. PENDANT – PENDANT UP LIGHT

IP40



2. SURFACE

IP40

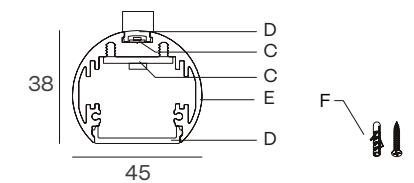

ELECTRIC SYSTEM LENGTH mm.




843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

- A – Aircraft cable (3 m)
- B – Power cable
- C – LED module
- D – Diffuser
- E – Aluminium profile
- F – Mounting kit


COMPONENTS

COVER KIT	REFERENCE
	TF10  2 × 9 mm

BOXES FOR PENDANT – Not included, please select

CONNECTION BOX	REFERENCE	DRIVER BOX NoN-DIMM	REFERENCE	DRIVER BOX DIMMABLE	REFERENCE
	CB09.12 		CB09.32 		CB09.40 

OTHER PENDANT OPTIONS

SUSPENSION KIT	DIMENSION	REFERENCE
	5 m	SC05.SA
	7 m	SC07.SA
	10 m	SC10.SA

JOINTS

LINEAR JOINT

UR10 

-  **INSTALLATION**
- 1 · Pendant

3 · Surface
-  **FINISH**
- B · Black

W · White

S · Special color

 ON DEMAND OPTIONS

-  Special finishes
-  Special color temperatures
-  Custom dimensions
-  CRI 80
-  Emergency lighting
-  Motion detection
-  Wireless control options
-  RGB

TECHNICAL INFORMATION


POWER STANDARD

		843	1124	1405	1686	1967	2248
	24 V	4 W 387 – 405 – 425 lm	6 W 622 – 634 – 666 lm	8 W 824 – 840 – 882 lm	10 W 1034 – 1054 – 1107 lm	12 W 1243 – 1268 – 1331 lm	14 W 1460 – 1490 – 1564 lm
	500 mA	17 W 2454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm	33 W 4908 – 5814 – 6258 lm	39 W 5726 – 6783 – 7301 lm	45 W 6544 – 7752 – 8344 lm
Opal	2700 K	276EH  112 	276EJ  112 	276EL  112 	276EN  112 	276EP  112 	276ER  112 
	3000 K	276EH  113 	276EJ  113 	276EL  113 	276EN  113 	276EP  113 	276ER  113 
	4000 K	276EH  115 	276EJ  115 	276EL  115 	276EN  115 	276EP  115 	276ER  115 
Microprismatic	2700 K	276EH  122 	276EJ  122 	276EL  122 	276EN  122 	276EP  122 	276ER  122 
	3000 K	276EH  123 	276EJ  123 	276EL  123 	276EN  123 	276EP  123 	276ER  123 
	4000 K	276EH  125 	276EJ  125 	276EL  125 	276EN  125 	276EP  125 	276ER  125 

POWER HIGH

		843	1124	1405	1686	1967	2248
	24 V	8 W 643 – 683 – 722 lm	12 W 1007 – 1069 – 1131 lm	16 W 1334 – 1417 – 1500 lm	20 W 1674 – 1777 – 1881 lm	24 W 2014 – 2138 – 2263 lm	28 W 2366 – 2512 – 2658 lm
	500 mA	33 W 5058 – 5814 – 6258 lm	45 W 6744 – 7752 – 8344 lm	56 W 8430 – 9690 – 10430 lm	67 W 10116 – 11628 – 12516 lm	78 W 11802 – 13566 – 14602 lm	89 W 13488 – 15504 – 16688 lm
Opal	2700 K	276EH 312	276EJ 312	276EL 312	276EN 312	276EP 312	276ER 312
	3000 K	276EH 313	276EJ 313	276EL 313	276EN 313	276EP 313	276ER 313
	4000 K	276EH 315	276EJ 315	276EL 315	276EN 315	276EP 315	276ER 315
Microprismatic	2700 K	276EH 322	276EJ 322	276EL 322	276EN 322	276EP 322	276ER 322
	3000 K	276EH 323	276EJ 323	276EL 323	276EN 323	276EP 323	276ER 323
	4000 K	276EH 325	276EJ 325	276EL 325	276EN 325	276EP 325	276ER 325

The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

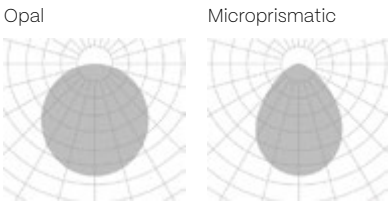

The data shown corresponds to raw values.

-  **INSTALLATION**
- 1 · Pendant

2 · Pendant up light

3 · Surface
-  **FINISH**
- B · Black

W · White


S · Special color
-  **DIMM OPTIONS**
- O · On-Off

D · Dali

P · Push

V · 1.10v
-  Up light
-  Down light

ALBA LINGGO

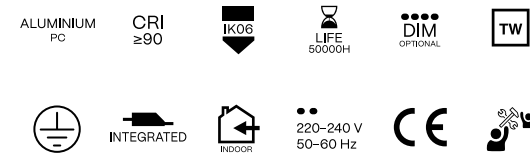


INSTALLATION




1. PENDANT – PENDANT UP LIGHT

IP40



2. SURFACE

IP40

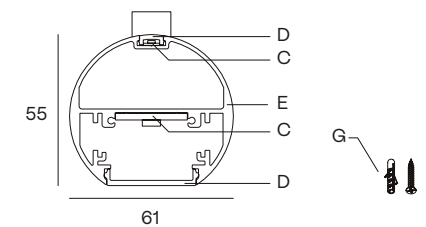

ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194


A – Aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser
E – Aluminium profile

G – Mounting kit


COMPONENTS

COVER KIT	REFERENCE
	TF09  2 × 12 mm

BOXES FOR PENDANT – Not included, please select

CONNECTION BOX	REFERENCE
	CB09.12 

OTHER PENDANT OPTIONS

SUSPENSION KIT	DIMENSION	REFERENCE
	5 m	SC05.SA
	7 m	SC07.SA
	10 m	SC10.SA

JOINTS

LINEAR JOINT

UR09

-  **INSTALLATION**
1 · Pendant
3 · Surface
-  **FINISH**
B · Black
W · White
S · Special color

-  **ON DEMAND OPTIONS**

 Special finishes

 Emergency lighting

 Special color temperatures

 Motion detection

 Custom dimensions

 Wireless control options

 CRI 80

 RGB

TECHNICAL INFORMATION

POWER STANDARD


		843	1124	1405	1686	1967	2248
	24 V	4 W 387 – 405 – 425 lm	6 W 622 – 634 – 666 lm	8 W 824 – 840 – 882 lm	10 W 1034 – 1054 – 1107 lm	12 W 1243 – 1268 – 1331 lm	14 W 1460 – 1490 – 1564 lm
	500 mA	17 W 2454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm	33 W 4908 – 5814 – 6258 lm	39 W 5726 – 6783 – 7301 lm	45 W 6544 – 7752 – 8344 lm
Opal	2700 K	275EH  112 	275EJ  112 	275EL  112 	275EN  112 	275EP  112 	275ER  112 
	3000 K	275EH  113 	275EJ  113 	275EL  113 	275EN  113 	275EP  113 	275ER  113 
	4000 K	275EH  115 	275EJ  115 	275EL  115 	275EN  115 	275EP  115 	275ER  115 
Microprismatic	2700 K	275EH  122 	275EJ  122 	275EL  122 	275EN  122 	275EP  122 	275ER  122 
	3000 K	275EH  123 	275EJ  123 	275EL  123 	275EN  123 	275EP  123 	275ER  123 
	4000 K	275EH  125 	275EJ  125 	275EL  125 	275EN  125 	275EP  125 	275ER  125 

POWER HIGH

		843	1124	1405	1686	1967	2248
	24 V	8 W 643 – 683 – 722 lm	12 W 1007 – 1069 – 1131 lm	16 W 1334 – 1417 – 1500 lm	20 W 1674 – 1777 – 1881 lm	24 W 2014 – 2138 – 2263 lm	28 W 2366 – 2512 – 2658 lm
	500 mA	33 W 5058 – 5814 – 6258 lm	45 W 6744 – 7752 – 8344 lm	56 W 8430 – 9690 – 10430 lm	67 W 10116 – 11628 – 12516 lm	78 W 11802 – 13566 – 14602 lm	89 W 13488 – 15504 – 16688 lm
Opal	2700 K	275EH  312 	275EJ  312 	275EL  312 	275EN  312 	275EP  312 	275ER  312 
	3000 K	275EH  313 	275EJ  313 	275EL  313 	275EN  313 	275EP  313 	275ER  313 
	4000 K	275EH  315 	275EJ  315 	275EL  315 	275EN  315 	275EP  315 	275ER  315 
Microprismatic	2700 K	275EH  322 	275EJ  322 	275EL  322 	275EN  322 	275EP  322 	275ER  322 
	3000 K	275EH  323 	275EJ  323 	275EL  323 	275EN  323 	275EP  323 	275ER  323 
	4000 K	275EH  325 	275EJ  325 	275EL  325 	275EN  325 	275EP  325 	275ER  325 

The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.


Opal



The data shown corresponds to raw values.



-  **INSTALLATION**
1 · Pendant
2 · Pendant up light
3 · Surface
-  **FINISH**
B · Black
W · White
S · Special color
-  **DIMM OPTIONS**
O · On-Off
D · Dali
P · Push
V · 1.10v
-  Up light
 Down light

FLY



FLY

NEW

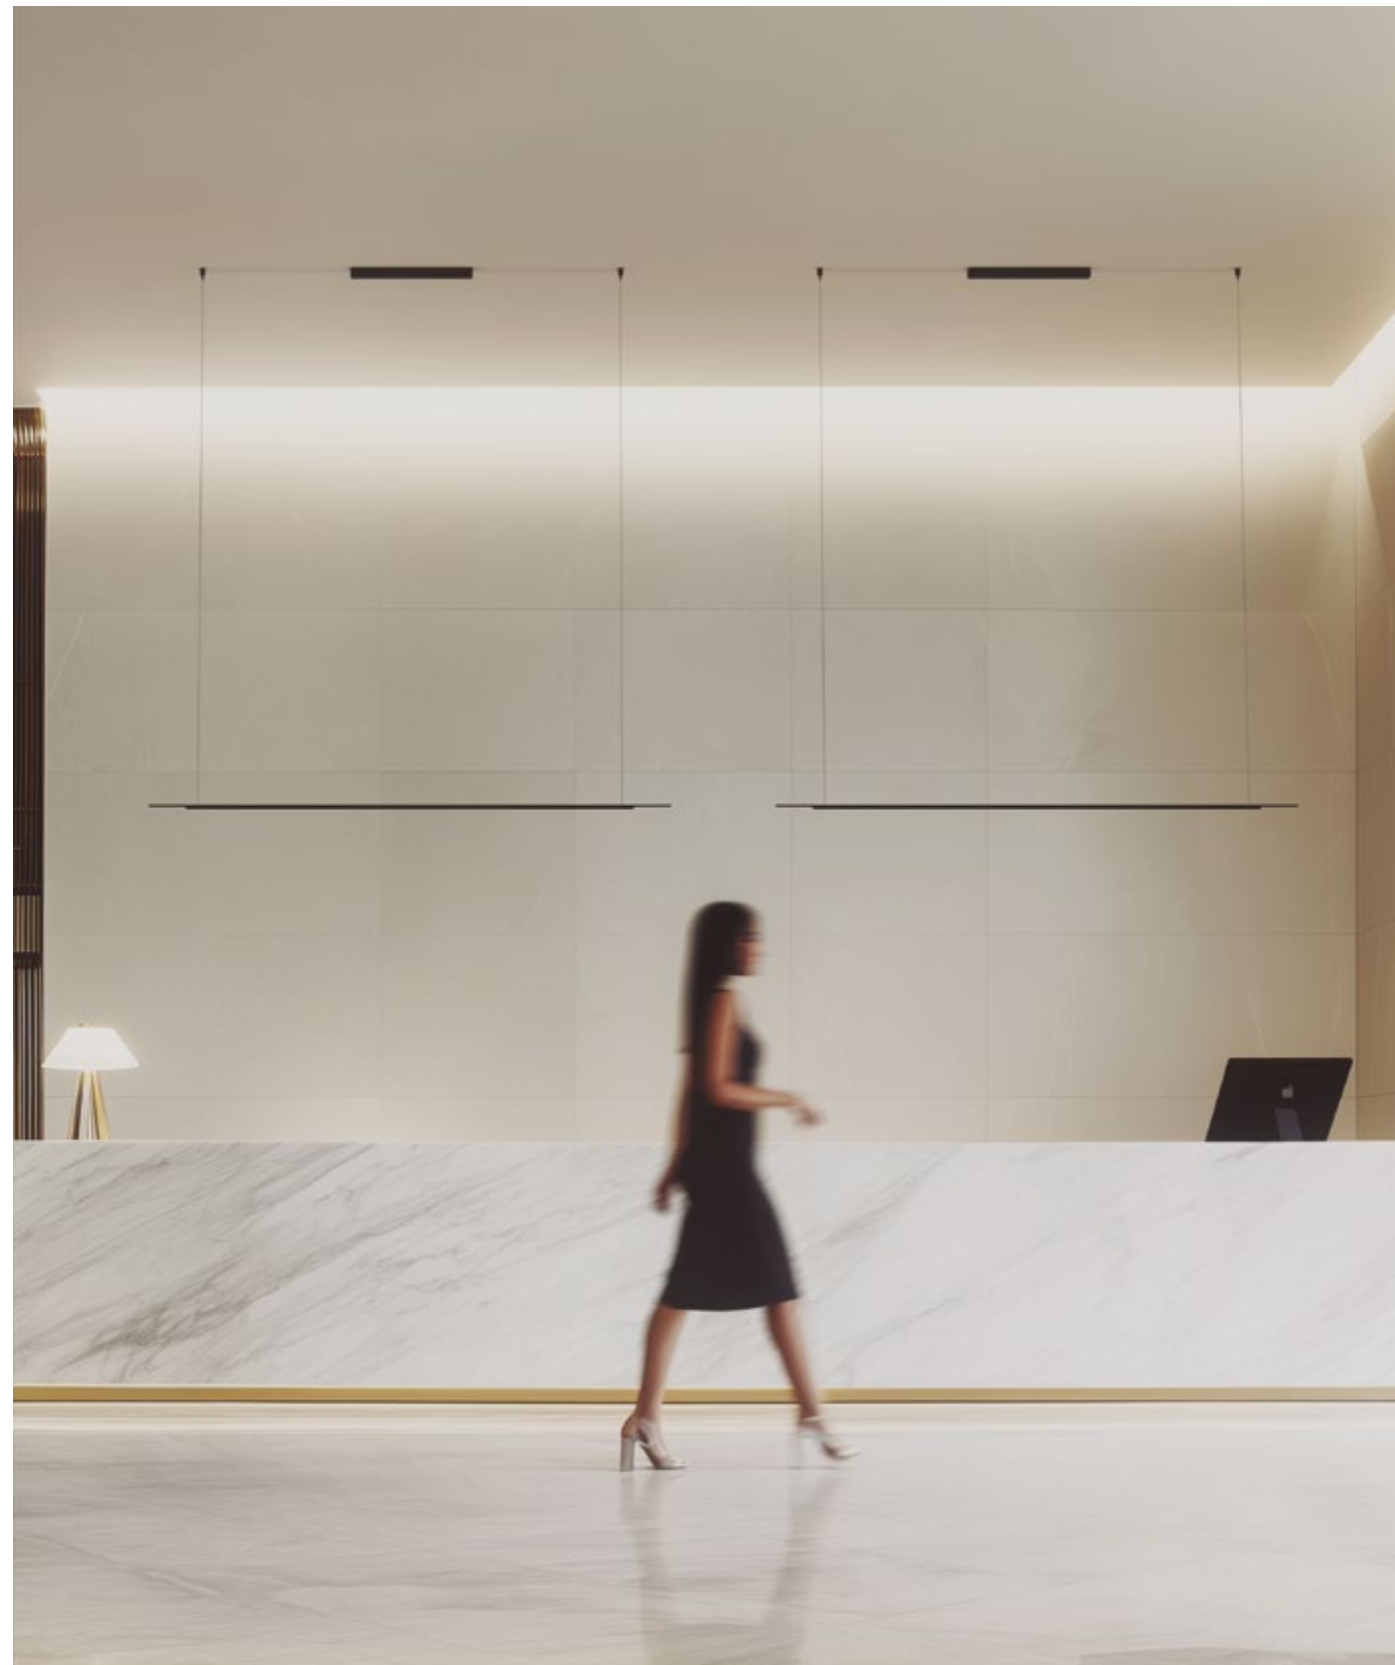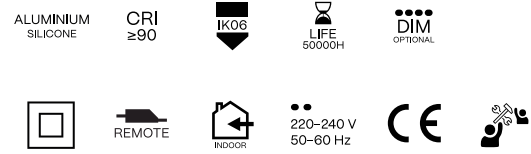


INSTALLATION



1. PENDANT

IP40






ELECTRIC SYSTEM LENGTH mm.
1000

A – Electrified cable (3 m)
C – LED module
D – Diffuser
E – Aluminium profile



TECHNICAL INFORMATION

PENDANT COMPONENTS & COVER KIT

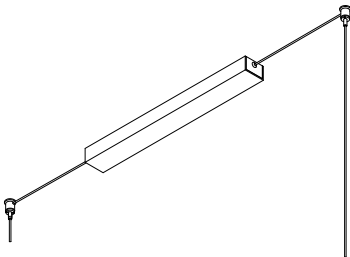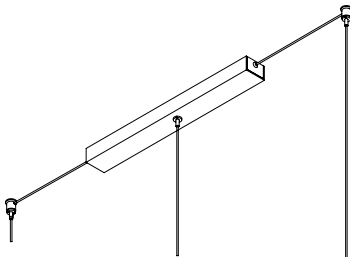CONNECTION BOX & SUSPENSION KIT TWO HANGING CABLES	CONNECTION BOX & SUSPENSION KIT THREE HANGING CABLES	COVER KIT
		
Black finish A270BB300XB	Black finish A270BE300XB	Black finish A270CX100XB
White finish A270BB300XW	White finish A270BE300XW	White finish A270CX100XW

DRIVERS


ON-OFF DRIVER		DALI / PUSH DRIVER	
30 W	A270DB3XXXO	30 W	A270DB3XXXD
60 W	A270DE3XXXO	60 W	A270DE3XXXD

POWER STANDARD

	per meter	1000	
		29 W 2249 – 2429 – 2666 lm	
Silicone	2700 K	270EH1  112 	
	3000 K	270EH1  113 	
	4000 K	270EH1  115 	


When the profile (without end caps) measures up to 1400 mm, 2 suspension kits are used.
When the profile (without end caps) measures up to 2800 mm, 3 suspension kits are used.

Silicone




The data shown corresponds to raw values.

FINISH	DIMM OPTIONS	Down light	ON DEMAND OPTIONS
B · Black W · White S · Special color	O · On-Off D · Dali P · Push V · 1.10v		 Special finishes  Custom dimensions  Tunable white  RGB

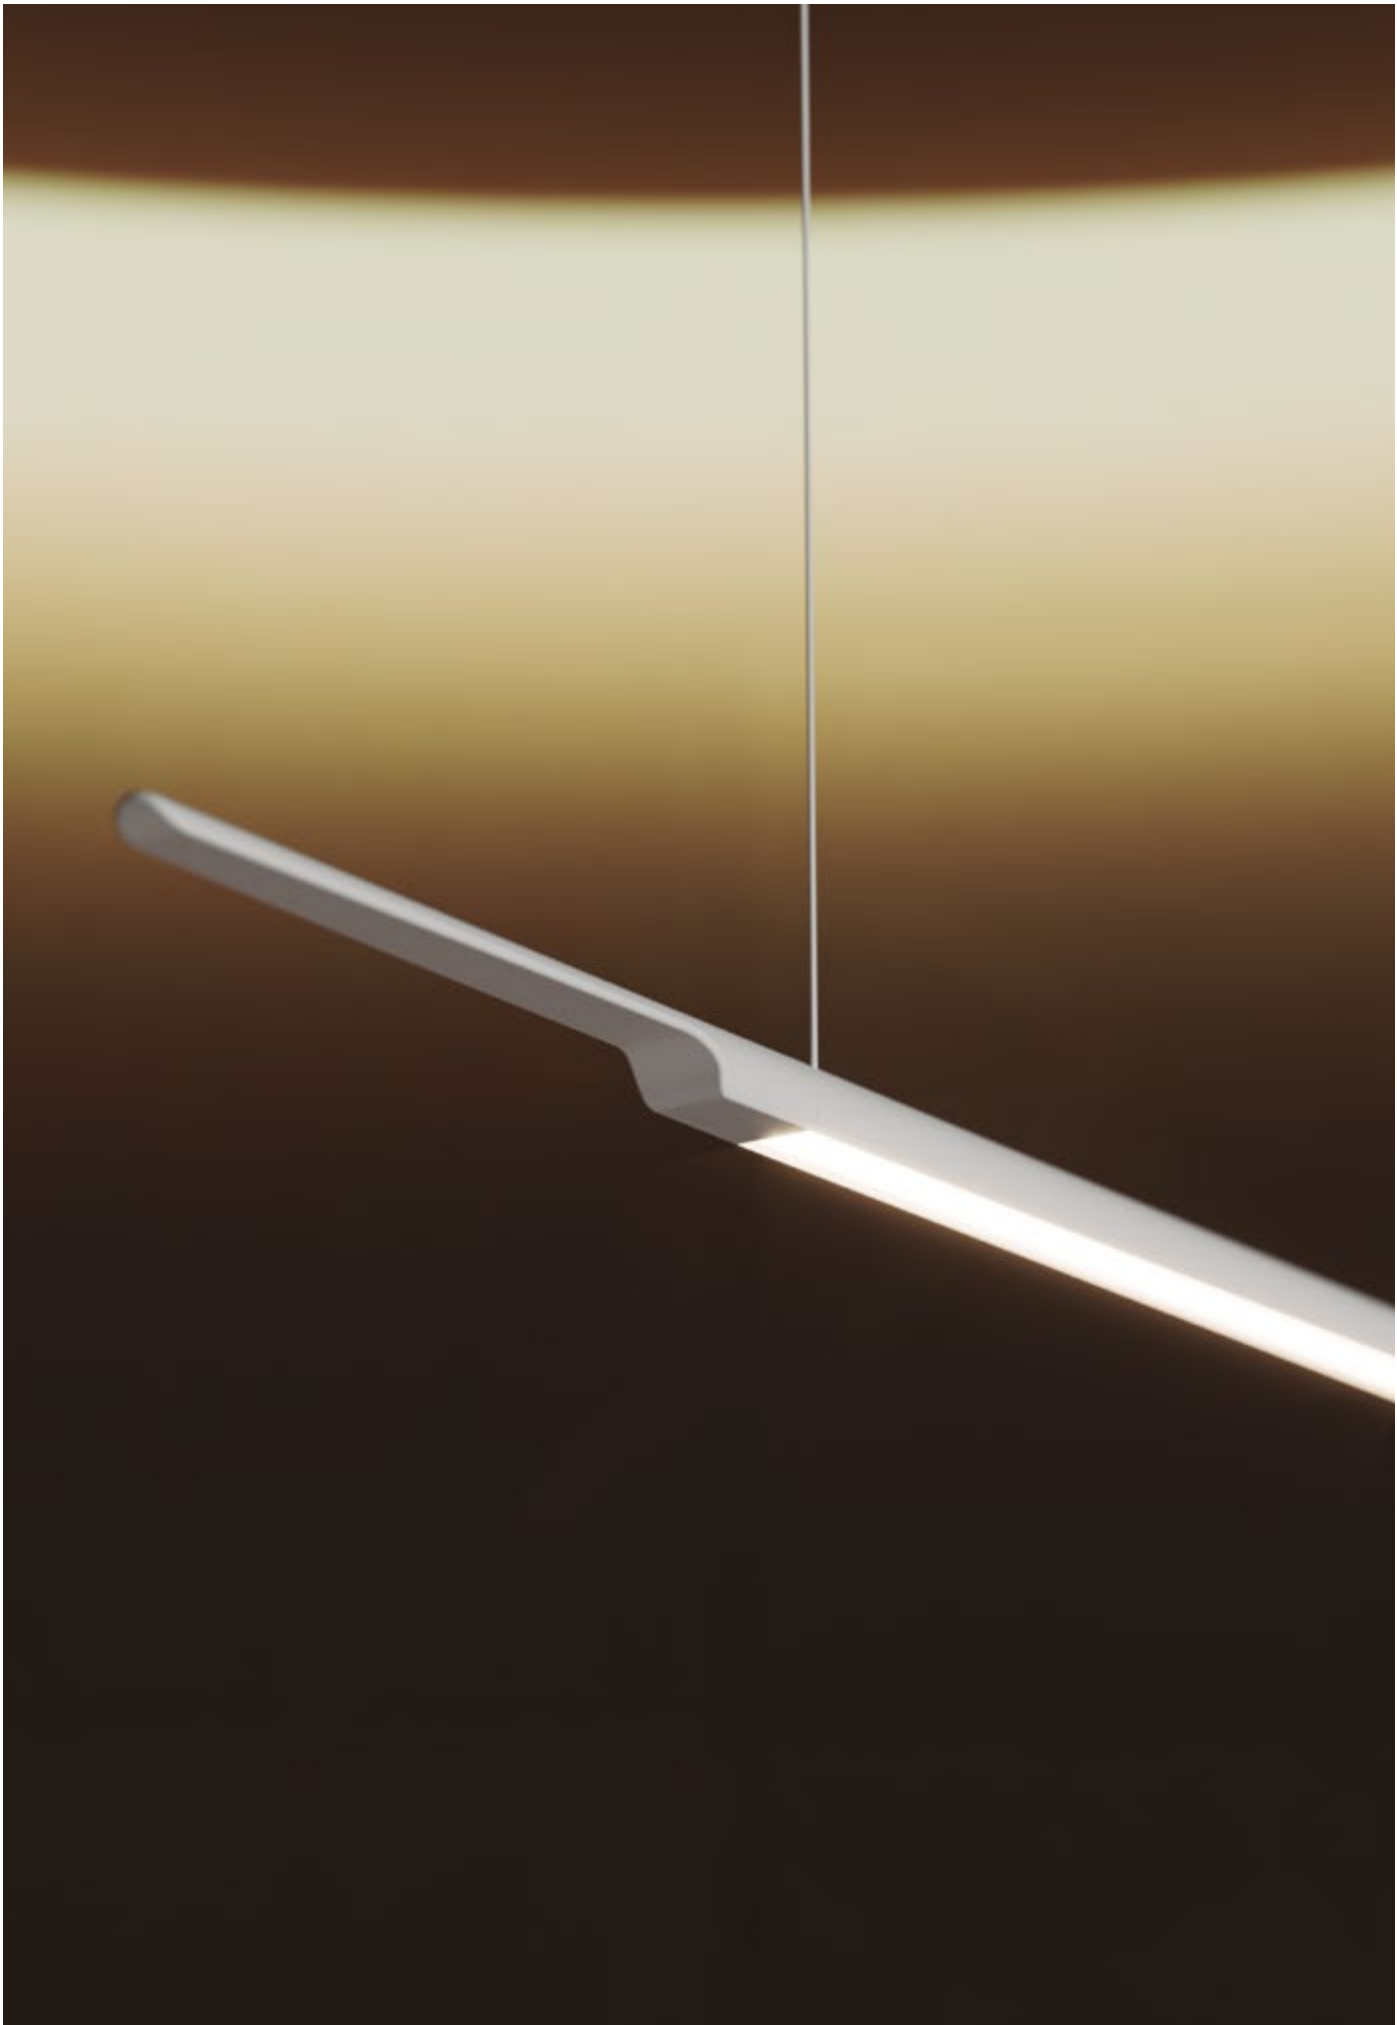


VAULT



VAULT
REF. 265
PAG. 244

VAULT

NEW

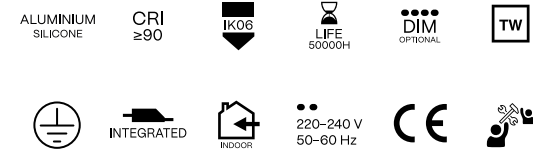


INSTALLATION




1. PENDANT

IP40



2. SURFACE

IP40

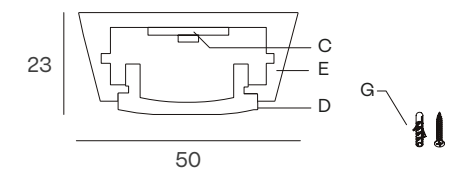


ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

A – Aircraft cable (3 m)
B – Power cable
C – LED module
D – Diffuser
E – Aluminium profile

G – Mounting kit

TECHNICAL INFORMATION

INFORMATION & COVER KIT

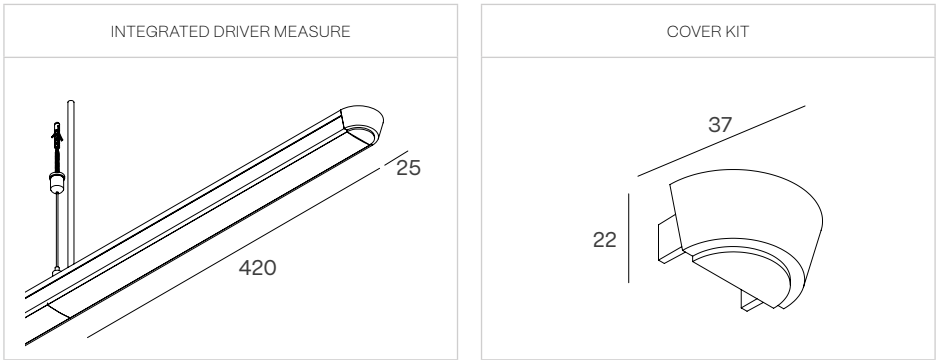

POWER STANDARD


		843	1124	1405	1686	1967	2248
Silicone		450 mA 15 W 2226 – 2297 – 2387 lm	600 mA 20 W 2968 – 3062 – 3182 lm	750 mA 25 W 3710 – 3828 – 3978 lm	900 mA 30 W 4452 – 4593 – 4773 lm	1500 mA 35 W 5194 – 5359 – 5569 lm	1200 mA 40 W 5936 – 6124 – 6364 lm
	2700 K	265EH 112	265EJ 112	265EL 112	265EN 112	265EP 112	265ER 112
	3000 K	265EH 113	265EJ 113	265EL 113	265EN 113	265EP 113	265ER 113
	4000 K	265EH 115	265EJ 115	265EL 115	265EN 115	265EP 115	265ER 115

POWER HIGH

		843	1124	1405	1686
Silicone		900 mA 30 W 4452 – 4593 – 4773 lm	1200 mA 40 W 5936 – 6124 – 6364 lm	1500 mA 50 W 7420 – 7655 – 7955 lm	1800 mA 61W 8904 – 9186 – 9546 lm
	2700 K	265EH 312	265EJ 312	265EL 312	265EN 312
	3000 K	265EH 313	265EJ 313	265EL 313	265EN 313
	4000 K	265EH 315	265EJ 315	265EL 315	265EN 315

The VAULT family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

Silicone



The data shown corresponds to raw values.

INSTALLATION

1 · Pendant
3 · Surface

FINISH

B · Black
W · White
S · Special color
G · Black – white
H · White – black

DIMM OPTIONS

O · On–Off
D · Dali
P · Push

ON DEMAND OPTIONS

Special finishes

Custom dimensions


TW Tunable white

RGB


Down light



OKKIA




OKKIA PLUS
REF. A287PBXXXX 
PAG. 250



OKKIA
REF. 287
PAG. 250

OKKIA

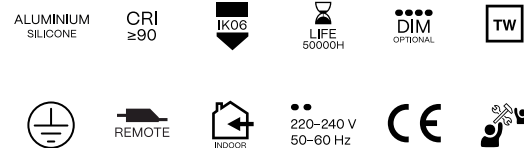


INSTALLATION




1. PENDANT - PENDANT UP LIGHT

IP40




2. SURFACE

IP40

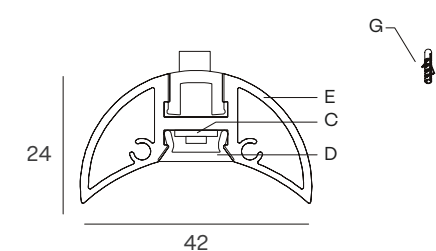

3. PLUS ACCESSORY

IP40



ELECTRIC SYSTEM LENGTH mm.
843 · 1124 · 1405 · 1686 · 1967 · 2248
For other sizes see page 194

A - Aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser
E - Aluminium profile

G - Mounting kit






COMPONENTS


TECHNICAL INFORMATION

COVER KIT	REFERENCE
	TF11  2 × 2 mm


BOXES FOR PENDANT – Not included, please select

CONNECTION BOX	REFERENCE	DRIVER BOX NON-DIMM	REFERENCE	CONNECTION BOX	REFERENCE
	CB09.12 		CB06.32 		CB06.40 

OTHER PENDANT OPTIONS

SUSPENSION KIT	DIMENSION	REFERENCE	2 SUSPENSION ROD	DIMENSION	REFERENCE
	5 m	SC05.SA		60 mm	SC21.60 
	7 m	SC07.SA		80 mm	SC21.80 
	10 m	SC10.SA		100 mm	SC100.60 

OKKIA PLUS ACCESORY

COVER KIT	REFERENCE	OKKIA PLUS ACCESORY	SKETCH	REFERENCE
	TF12  2 × 2 mm			A287PBXXXX 

 INSTALLATION 1 · Pendant 2 · Pendant up light 3 · Surface	 FINISH B · Black W · White S · Special color	 ON DEMAND OPTIONS  Special finishes  Tunable white  RGB  Number switches
--	---	---


		843	1124	1405	1686	1967	2248
	24 VdC	17 W 1249 – 1249 – 1481 lm	21 W 1562 – 1687 – 1852 lm	16 W 2186 – 2361 – 2592 lm	36 W 2655 – 2867 – 3148 lm	42 W 3123 – 3373 – 3703 lm	48 W 3591 – 3879 – 4259 lm
	24 VdC	23 W 1799 – 1943 – 2640 lm	29 W 2249 – 2429 – 2666 lm	40 W 3148 – 3400 – 3733 lm	49 W 3823 – 4129 – 4533 lm	58 W 4497 – 4857 – 5332 lm	66 W 5172 – 5586 – 6132 lm
Silicone	2700 K	287EH  112 	287EJ  112 	287EL  112 	287EN  112 	287EP  112 	287ER  112 
	3000 K	287EH  113 	287EJ  113 	287EL  113 	287EN  113 	287EP  113 	287ER  113 
	4000 K	287EH  115 	287EJ  115 	287EL  115 	287EN  115 	287EP  115 	287ER  115 

The OKKIA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

Silicone


The data shown corresponds to raw values.

ALZIRA



ALZIRA
REF. 267
PAG. 256


ALZIRA

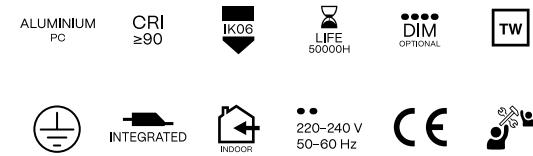


INSTALLATION



1. PENDANT

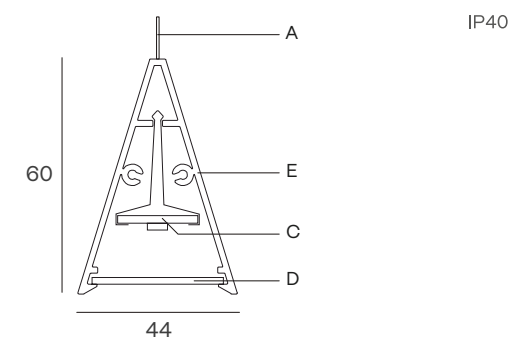

2. WALL SURFACE

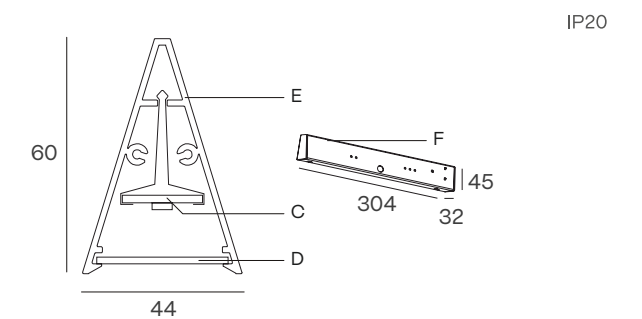

Compatible only with electric system lengths (mm): 281 · 422 · 562

See page 194

Example: **267EB2** **112**

ELECTRIC SYSTEM LENGTH mm.

843 · 1124 · 1405 · 1686 · 1967 · 2248

For other sizes see page 194

A – Electrified cable (3 m)

C – LED module

D – Diffuser

E – Aluminium profile

F – Connection box

COMPONENTS

COVER KIT	REFERENCE
	TF141  2 × 3 mm

TECHNICAL INFORMATION


POWER STANDARD – Pendant installation only

		843	1124	1405	1686	1967	2248
	500 mA	17 W 2454 – 2907 – 3129 lm	22 W 3272 – 3876 – 4172 lm	28 W 4090 – 4845 – 5215 lm	33 W 4908 – 5814 – 6258 lm	39 W 5726 – 6783 – 7301 lm	45 W 6544 – 7752 – 8344 lm
	Opal	2700 K	267EH1  112 	267EJ1  112 	267EL1  112 	267EN1  112 	267EP1  112 
		3000 K	267EH1  113 	267EJ1  113 	267EL1  113 	267EN1  113 	267EP1  113 
		4000 K	267EH1  115 	267EJ1  115 	267EL1  115 	267EN1  115 	267EP1  115 
Microprismatic	2700 K	267EH1  122 	267EJ1  122 	267EL1  122 	267EN1  122 	267EP1  122 	267ER1  122 
	3000 K	267EH1  123 	267EJ1  123 	267EL1  123 	267EN1  123 	267EP1  123 	267ER1  123 
	4000 K	267EH1  125 	267EJ1  125 	267EL1  125 	267EN1  125 	267EP1  125 	267ER1  125 

POWER HIGH – Pendant installation only

		843	1124	1405	1686	1967	2248
	500 mA	33 W 5058 – 5814 – 6258 lm	45 W 6744 – 7752 – 8344 lm	56 W 8430 – 9690 – 10430 lm	67 W 10116 – 11628 – 12516 lm	78 W 11802 – 13566 – 14602 lm	89 W 13488 – 15504 – 16688 lm
	Opal	2700 K	267EH1  312 	267EJ1  312 	267EL1  312 	267EN1  312 	267ER1  312 
		3000 K	267EH1  313 	267EJ1  313 	267EL1  313 	267EN1  313 	267ER1  313 
		4000 K	267EH1  315 	267EJ1  315 	267EL1  315 	267EN1  315 	267ER1  315 
Microprismatic	2700 K	267EH1  322 	267EJ1  322 	267EL1  322 	267EN1  322 	267EP1  322 	267ER1  322 
	3000 K	267EH1  323 	267EJ1  323 	267EL1  323 	267EN1  323 	267EP1  323 	267ER1  323 
	4000 K	267EH1  325 	267EJ1  325 	267EL1  325 	267EN1  325 	267EP1  325 	267ER1  325 

The ALZIRA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

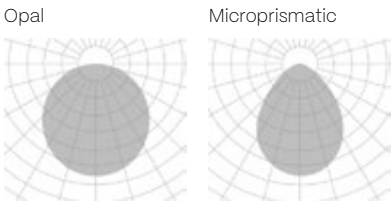

The data shown corresponds to raw values.

 **FINISH**
B · Black
W · White
S · Special color

 **ON DEMAND OPTIONS**

 Motion detection

 Special color temperatures

 CRI 80

 Emergency lighting


 RGB

 Remote wireless control options

 Down light

 **FINISH**
B · Black
W · White
S · Special color

 **DIMM OPTIONS**
O · On-Off
D · Dali
P · Push
V · 1.10v

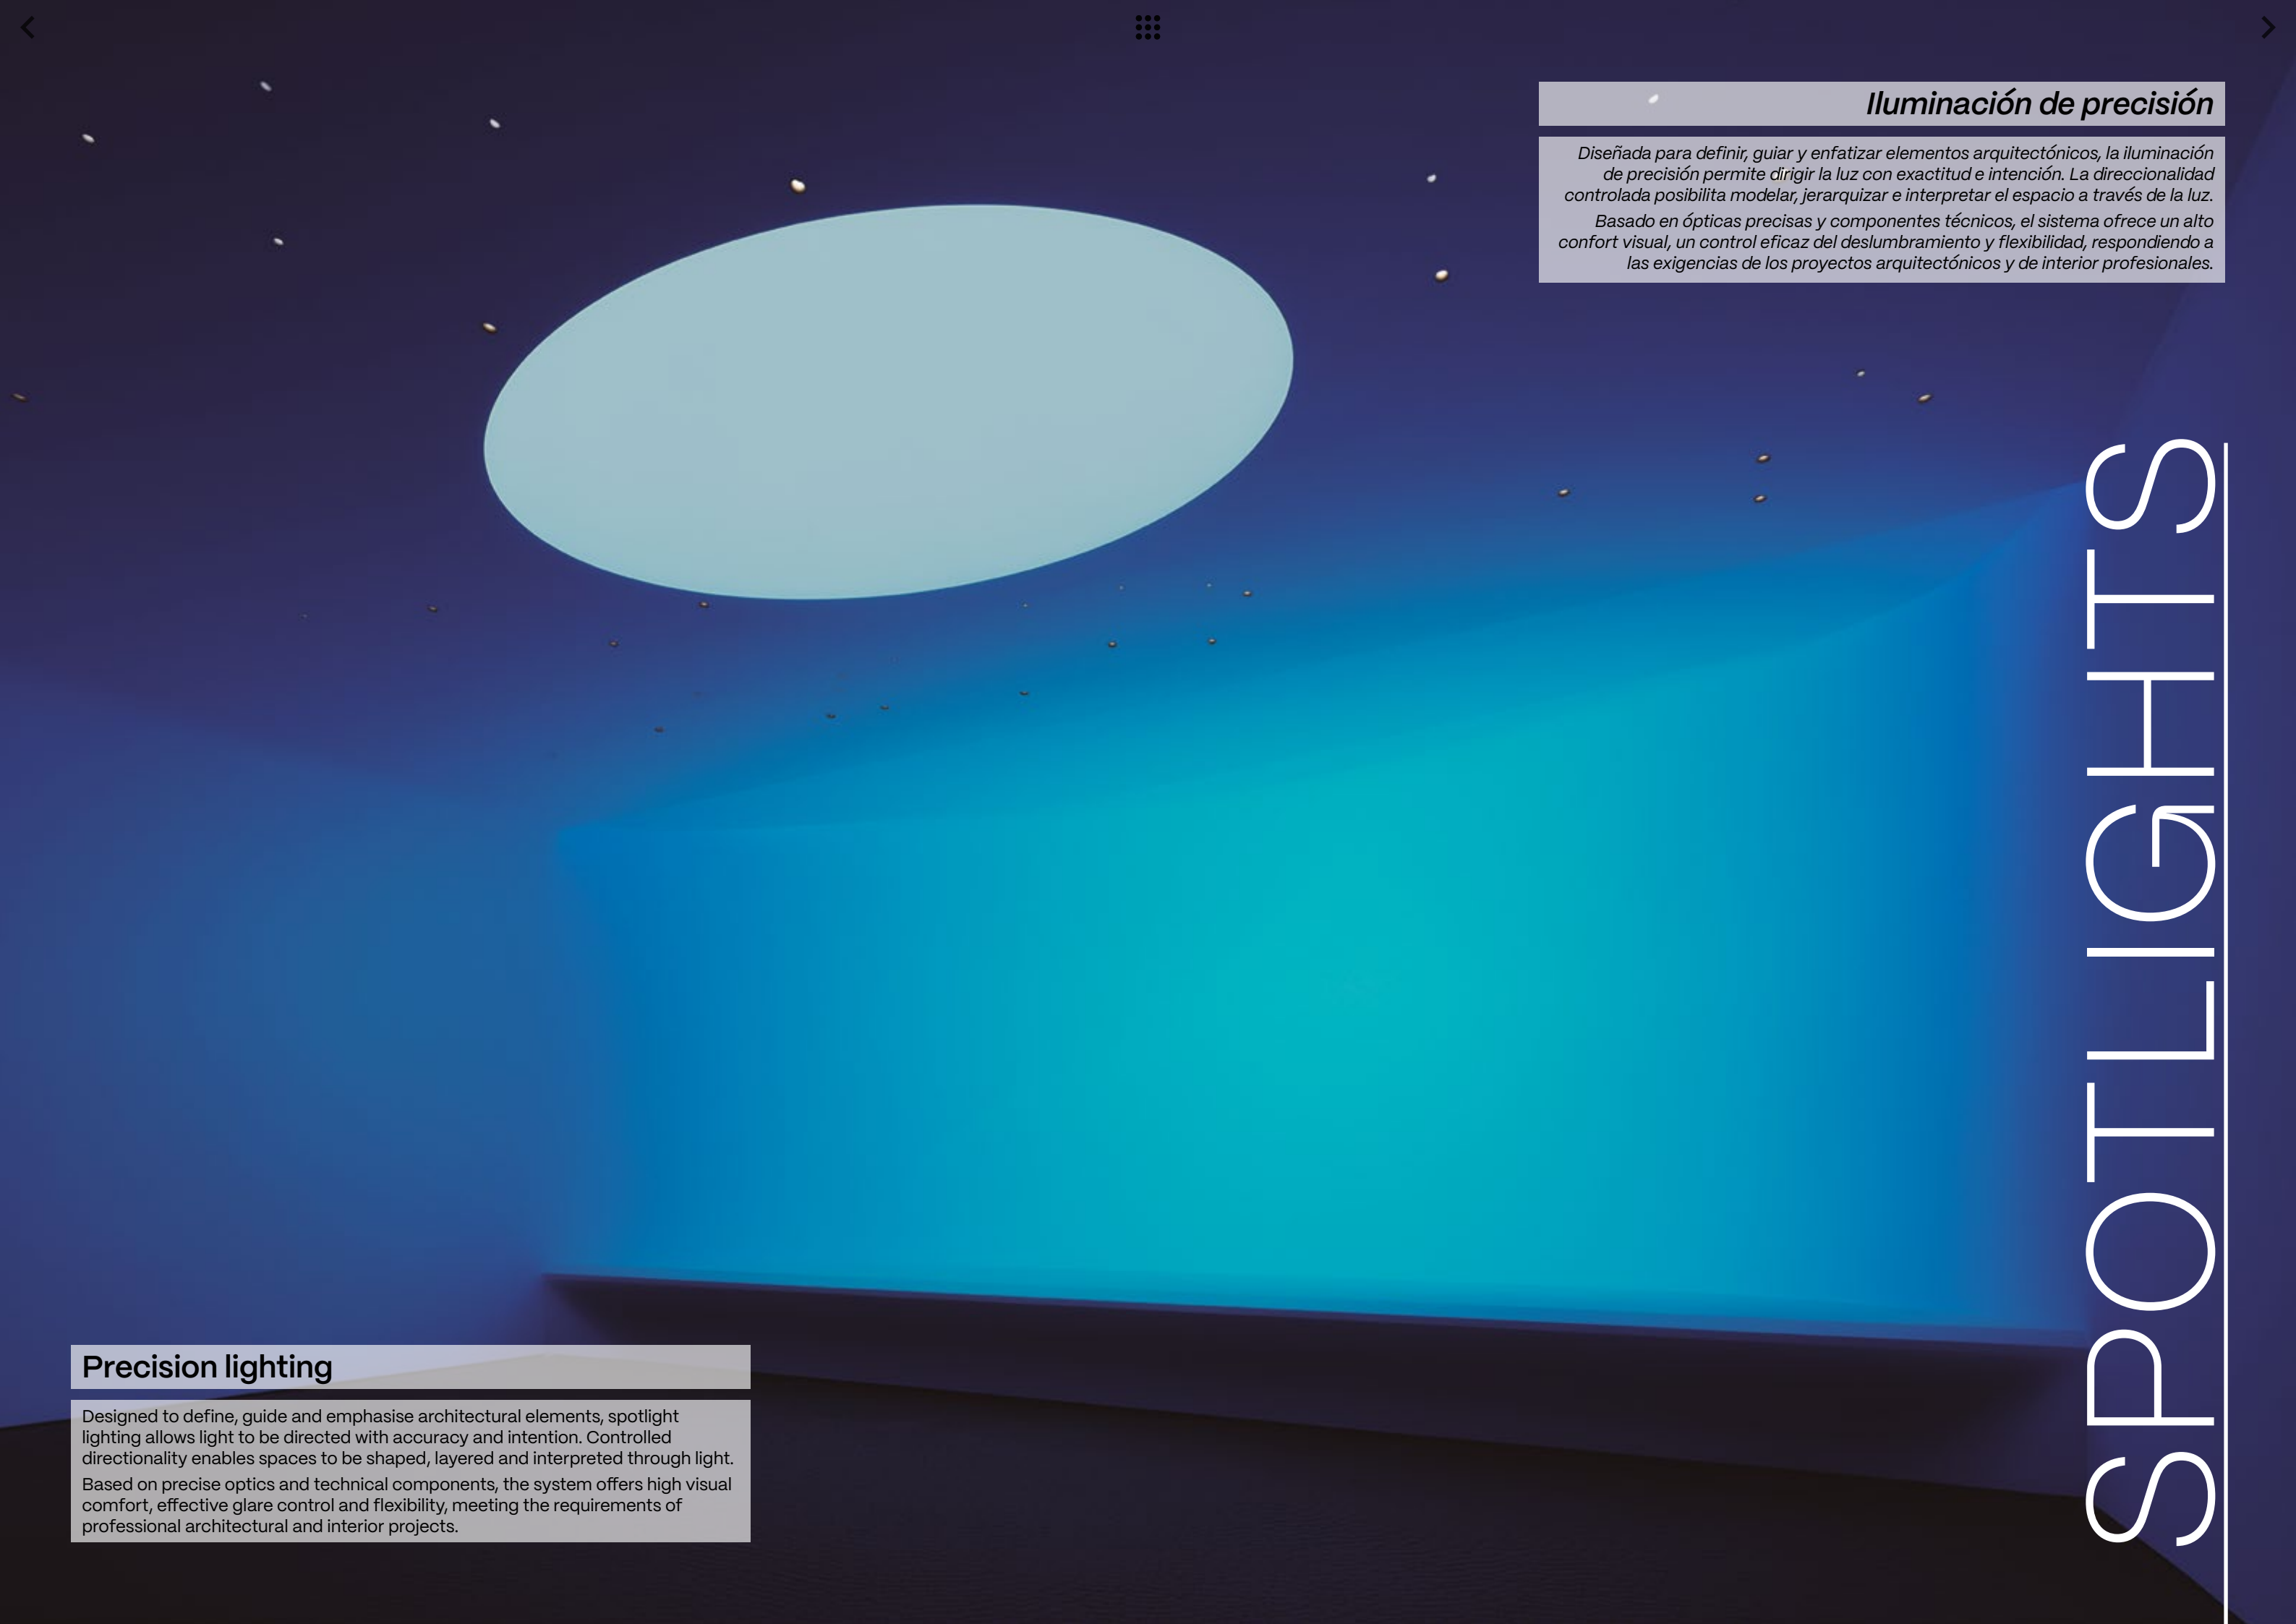

Iluminación de precisión

Diseñada para definir, guiar y enfatizar elementos arquitectónicos, la iluminación de precisión permite dirigir la luz con exactitud e intención. La direccionalidad controlada posibilita modelar, jerarquizar e interpretar el espacio a través de la luz.

Basado en ópticas precisas y componentes técnicos, el sistema ofrece un alto confort visual, un control eficaz del deslumbramiento y flexibilidad, respondiendo a las exigencias de los proyectos arquitectónicos y de interior profesionales.

Precision lighting

Designed to define, guide and emphasise architectural elements, spotlight lighting allows light to be directed with accuracy and intention. Controlled directionality enables spaces to be shaped, layered and interpreted through light.

Based on precise optics and technical components, the system offers high visual comfort, effective glare control and flexibility, meeting the requirements of professional architectural and interior projects.

SPOTLIGHTS

MARTORELL FAMILY

PAG. 264

PATRICIA

PAG. 284

KLIMT FAMILY

PAG. 290

CUBE FAMILY

PAG. 296

LUK FAMILY

PAG. 304

ORACLE

PAG. 308

LENT FAMILY

PAG. 312

ASTRA

PAG. 320

VIO FAMILY

PAG. 324

SASSY FAMILY

PAG. 328

ROY

PAG. 336

CAN REVIEW

PAG. 340

ALDAIA FAMILY

PAG. 346

VADI

PAG. 350

KONI FAMILY

PAG. 354


CATLI FAMILY

PAG. 360





MARTORELL FAMILY

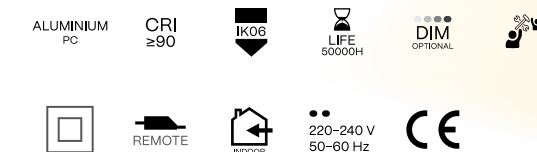

MARTORELL FLIP

NEW

Ø45

SURFACE	RECESSED WITH FRAME	TRIMLESS
IP20 INTEGRATED *1 350° 90°	IP20 IP20 REMOTE 350° 90°	IP20 IP20 REMOTE 350° 90°

Ø65

SURFACE	RECESSED WITH FRAME	TRIMLESS
IP20 INTEGRATED *2 350° 90°	IP20 IP20 REMOTE 350° 90°	IP20 IP20 REMOTE 350° 90°

Ø85

SURFACE	RECESSED WITH FRAME	TRIMLESS
IP20 INTEGRATED *2 350° 90°	IP20 IP20 REMOTE 350° 90°	IP20 IP20 REMOTE 350° 90°

*1 ELECTRIC CLASS II and DRIVER REMOTE when dimmable.
*2 ELECTRIC CLASS II and DRIVER REMOTE dimmable 1-10V.


- Cut hole
 Minimum height of the false ceiling
 Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**
 Special finishes
 Wireless control options

MARTORELL FLIP

POWER STANDARD

		Ø45	
	700 mA	6 W 886 – 898 – 939 lm	
24°	2700 K	337EB 132	
	3000 K	337EB 133	
	4000 K	337EB 135	
36°	2700 K	337EB 152	
	3000 K	337EB 153	
	4000 K	337EB 155	

		Ø65	Ø85
		350 mA 12 W 1784 – 1820 – 1866 lm	500 mA 16 W 2720 – 2767 – 2888 lm
15°	2700 K	337EE 122	337EH 122
	3000 K	337EE 123	337EH 123
	4000 K	337EE 125	337EH 125
24°	2700 K	337EE 132	337EH 132
	3000 K	337EE 133	337EH 133
	4000 K	337EE 135	337EH 135
38°	2700 K	337EE 152	337EH 152
	3000 K	337EE 153	337EH 153
	4000 K	337EE 155	337EH 155

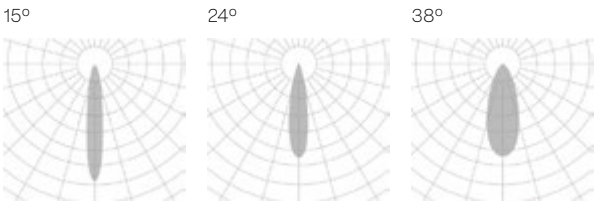


The data shown corresponds to raw values.


- INSTALLATION**
3 · Surface
5 · Recessed
6 · Trimless
- FINISH**
B · Black
W · White
- DIMM OPTIONS**
O · On-Off
D · Dali
P · Push
V · 1.10v
- Down light

MARTORELL MOVE


Ø26

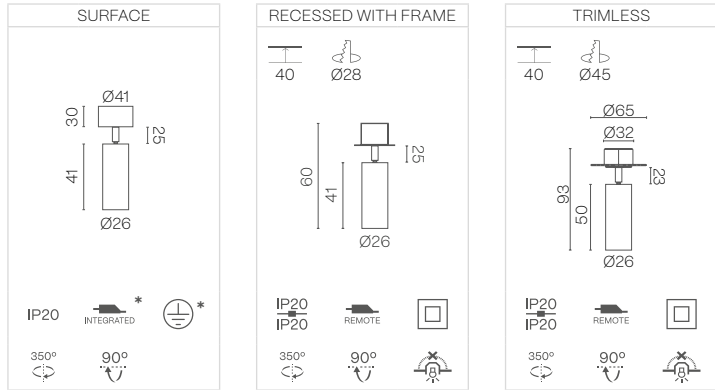

Ø40

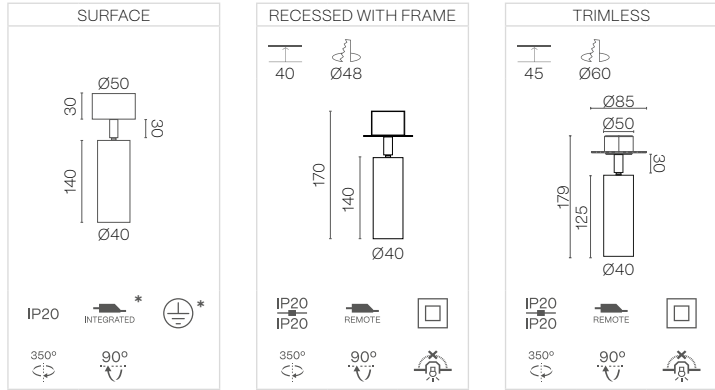

Ø60

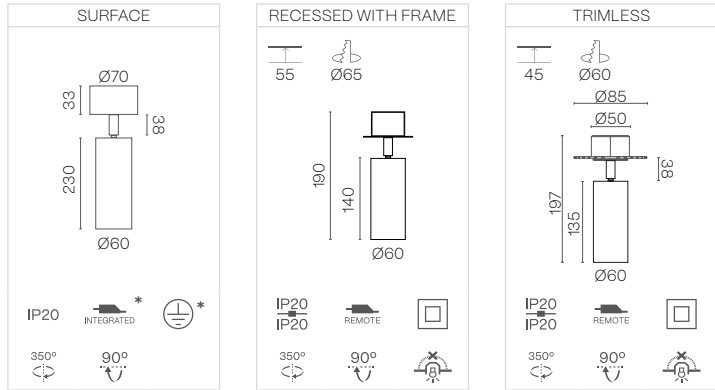

* ELECTRIC CLASS II and DRIVER REMOTE when dimmable


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS
- Special finishes
- Wireless control options

MARTORELL MOVE

POWER STANDARD

		Ø26	
	700 mA	2 W 195 – 209 – 237 lm	
20°	2700 K	339EB	132
	3000 K	339EB	133
	4000 K	339EB	135
40°	2700 K	339EB	152
	3000 K	339EB	153
	4000 K	339EB	155
60°	2700 K	339EB	172
	3000 K	339EB	173
	4000 K	339EB	175

		Ø40		Ø60	
		700 mA 6 W 886 – 898 – 939 lm		350 mA 12 W 1745 – 1774 – 1857 lm	
18°	2700 K	339EE	132	339EH	132
	3000 K	339EE	133	339EH	133
	4000 K	339EE	135	339EH	135
25°	2700 K	339EE	142	339EH	142
	3000 K	339EE	143	339EH	143
	4000 K	339EE	145	339EH	145
35°	2700 K	339EE	152	339EH	152
	3000 K	339EE	153	339EH	153
	4000 K	339EE	155	339EH	155

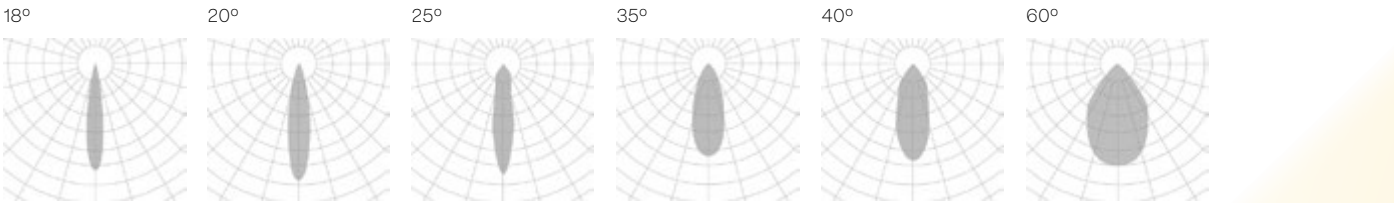

The data shown corresponds to raw values.

- INSTALLATION**
 - 3 · Surface
 - 5 · Recessed with frame
 - 6 · Trimless
- FINISH**
 - B · Black
 - W · White
 - G · Black – white
 - H · White – black
- DIMM OPTIONS**
 - O · On-Off
 - D · Dali
 - P · Push
- Down light

Ø33 / Ø26

PENDANT & PENDANT TRACK

IP20 INTEGRATED *

SURFACE

IP20 INTEGRATED *

RECESSED WITH FRAME

IP20 IP20 REMOTE

350° 90°

TRIMLESS

IP20 IP20 REMOTE

350° 90°

WALL SURFACE

IP20 INTEGRATED *

NEW

Ø40

PENDANT & PENDANT TRACK

IP20 INTEGRATED *

SURFACE

IP20 INTEGRATED *

RECESSED WITH FRAME

IP20 IP20 REMOTE

350° 90°

TRIMLESS

IP20 IP20 REMOTE

350° 90°

WALL SURFACE

IP20 INTEGRATED *

NEW

Ø60

PENDANT & PENDANT TRACK

IP20 INTEGRATED *

SURFACE

IP20 INTEGRATED *

RECESSED WITH FRAME

IP20 IP20 REMOTE

350° 90°

TRIMLESS

IP20 IP20 REMOTE

350° 90°

TRACKLIGHT

IP20 INTEGRATED

350° 90°

WALL SURFACE

IP20 REMOTE *

NEW

* ELECTRIC CLASS II and DRIVER REMOTE for dimmable and 1–10V dimmable versions.


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS
- Special finishes
 - Wireless control options

POWER STANDARD

		Ø33 / Ø26	Ø40	Ø60	Ø60 TRACKLIGHT
		700 mA 2 W 195 – 209 – 237 lm	700 mA 6 W 886 – 898 – 939 lm	350 mA 12 W 1745 – 1774 – 1857 lm	350 mA 12 W 1745 – 1774 – 1857 lm
15°	2700 K	335EB 122	335EE 122	335EH 122	-
	3000 K	335EB 123	335EE 123	335EH 123	-
	4000 K	335EB 125	335EE 125	335EH 125	-
24°	2700 K	335EB 132	335EE 132	335EH 132	335EH9 132
	3000 K	335EB 133	335EE 133	335EH 133	335EH9 133
	4000 K	335EB 135	335EE 135	335EH 135	335EH9 135
32°	2700 K	335EB 142	335EE 142	335EH 142	335EH9 142
	3000 K	335EB 143	335EE 143	335EH 143	335EH9 143
	4000 K	335EB 145	335EE 145	335EH 145	335EH9 145
43°	2700 K			335EH 152	
	3000 K			335EH 153	
	4000 K			335EH 155	
60°	2700 K	-	-	335EH 172	-
	3000 K	-	-	335EH 173	-
	4000 K	-	-	335EH 175	-

15°/43° beam angle and Ø33/Ø26 size only for recessed with frame and trimless installations.
60° beam angle and Ø60 size not available for recessed with frame and trimless installations.

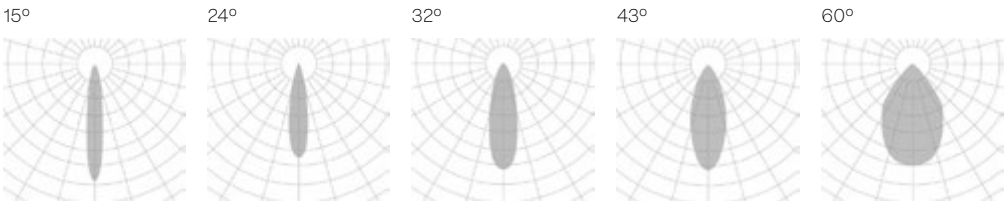

The data shown corresponds to raw values.

- INSTALLATION


 - 1 · Pendant
 - 3 · Surface
 - 5 · Recessed with frame
 - 6 · Trimless
 - 7 · Wall surface
 - 9 · Tracklight
 - R · Pendant track
- FINISH

 - B · Black
 - W · White
 - G · Black – white
 - H · White – black
- DIMM OPTIONS

 - O · On–Off
 - D · Dali
 - P · Push
 - V · 1.10v
- Down light

MARTORELL TUBE MOVE

Ø60

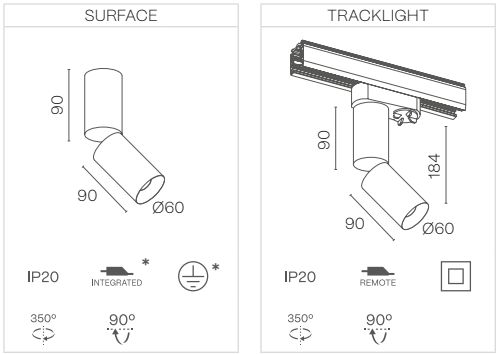

* ELECTRIC CLASS II and DRIVER REMOTE when 1:10 dimmable.

- ON DEMAND OPTIONS
- Special finishes

Wireless control options

MARTORELL TUBE MOVE

POWER STANDARD

		Ø60	
19°	250 mA	8 W 796 – 841 – 929 lm	
	2700 K	345EH 132	
	3000 K	345EH 133	
24°	4000 K	345EH 135	
	2700 K	345EH 142	
	3000 K	345EH 143	
36°	4000 K	345EH 145	
	2700 K	345EH 152	
	3000 K	345EH 153	
	4000 K	345EH 155	



The data shown corresponds to raw values.

- INSTALLATION


3 · Surface
9 · Tracklight
- FINISH

B · Black
W · White
G · Black – white
H · White – black
- DIMM OPTIONS


O · On–Off
D · Dali
P · Push
V · 1:10v
- Down light

MARTORELL CRATE


CRATE

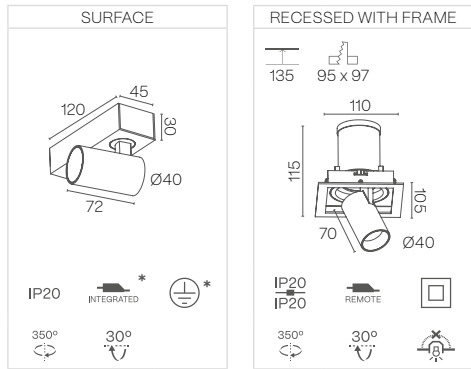

CRATE DOUBLE

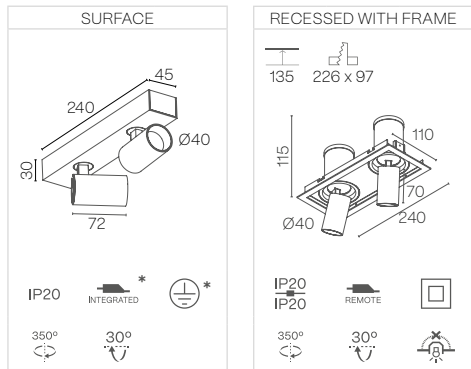

CRATE TRIPLE

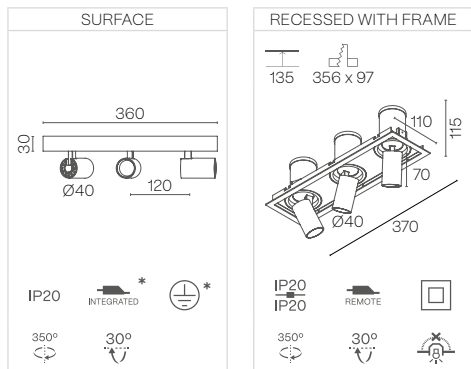

* ELECTRIC CLASS II and DRIVER REMOTE when 1:10 dimmable.

- Cut hole

Minimum height of the false ceiling

Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS


Special finishes

Wireless control options

MARTORELL CRATE

POWER STANDARD

		CRATE	CRATE DOUBLE	CRATE TRIPLE
	700 mA	8 W 470 – 498 – 515 lm	16 W 940 – 996 – 1030 lm	24 W 1410 – 1494 – 1545 lm
	15°	2700 K 336EB 122	336EE 122	336EH 122
		3000 K 336EB 123	336EE 123	336EH 123
		4000 K 336EB 125	336EE 125	336EH 125
24°	2700 K	336EB 132	336EE 132	336EH 132
	3000 K	336EB 133	336EE 133	336EH 133
	4000 K	336EB 135	336EE 135	336EH 135
32°	2700 K	336EB 142	336EE 142	336EH 142
	3000 K	336EB 143	336EE 143	336EH 143
	4000 K	336EB 145	336EE 145	336EH 145

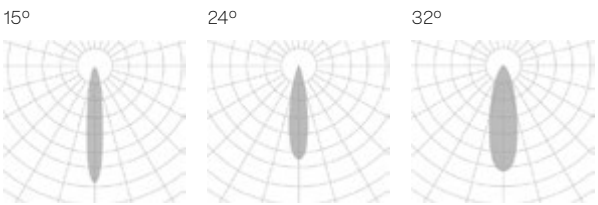

The data shown corresponds to raw values.

- INSTALLATION

3 · Surface

5 · Recessed with frame
- FINISH

B · Black

W · White

G · Black – white

H · White – black
- DIMM OPTIONS


O · On–Off

D · Dali


P · Push
- Down light

MARTORELL MINI CRATE


MINI CRATE

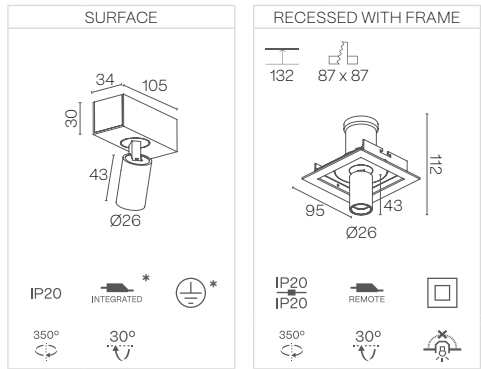

MINI CRATE DOUBLE

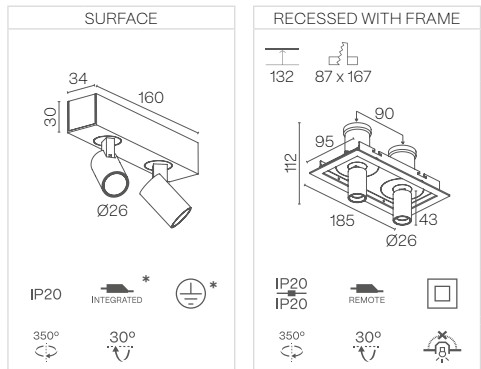

MINI CRATE TRIPLE

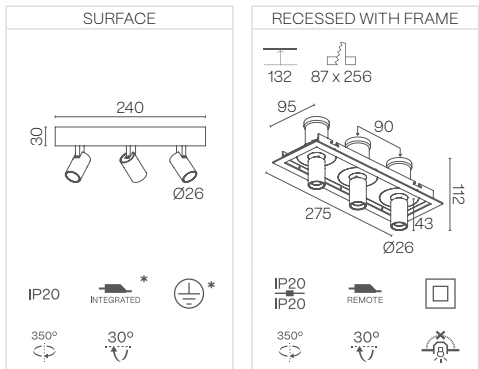

* ELECTRIC CLASS II and DRIVER REMOTE when dimmable.


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**
- Special finishes
- Wireless control options

MARTORELL MINI CRATE

POWER STANDARD

		MINI CRATE	
20°	700 mA	3 W 175 – 188 – 199 lm	
	2700 K	338EB 132	
	3000 K	338EB 133	
40°	4000 K	338EB 135	
	2700 K	338EB 152	
	3000 K	338EB 153	
60°	4000 K	338EB 155	
	2700 K	338EB 172	
	3000 K	338EB 173	
	4000 K	338EB 175	

		MINI CRATE DOUBLE		MINI CRATE TRIPLE	
20°	700 mA	6 W 350 – 376 – 398 lm		9 W 525 – 564 – 597 lm	
	2700 K	338EE 132		338EH 132	
	3000 K	338EE 133		338EH 133	
40°	4000 K	338EE 135		338EH 135	
	2700 K	338EE 152		338EH 152	
	3000 K	338EE 153		338EH 153	
60°	4000 K	338EE 155		338EH 155	
	2700 K	338EE 172		338EH 172	
	3000 K	338EE 173		338EH 173	
	4000 K	338EE 175		338EH 175	

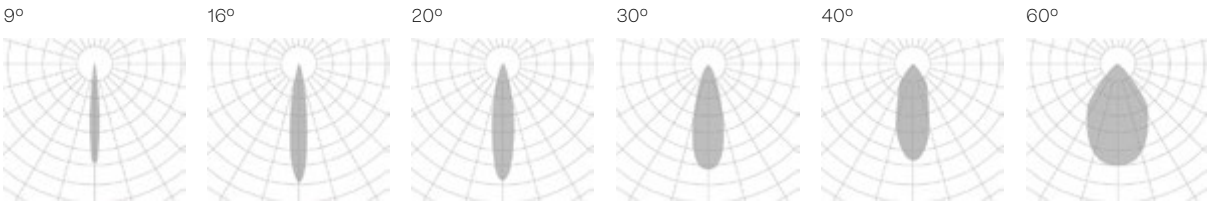

The data shown corresponds to raw values.

- INSTALLATION**
- 3 · Surface
- 5 · Recessed with frame
- FINISH**
- B · Black
- W · White
- DIMM OPTIONS**
- O · On-Off
- D · Dali
- P · Push
- Down light



MARTORELL SQ

MARTORELL SQ

SQ

PENDANT

120
94 94

IP20 * *

NEW

SURFACE

120
94 94

IP20 * *

WALL SURFACE

122
96 94

IP20 * *

NEW

SQ DOUBLE

PENDANT

120
187 95

IP20 * *

NEW

SURFACE

120
187 95


IP20 * *

* ELECTRIC CLASS II and DRIVER REMOTE when 1.10 dimmable.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS
- Special finishes
- Wireless control options

POWER STANDARD

		SQ	SQ DOUBLE
		350 mA 11 W 720 - 759 - 908 lm	700 mA 22 W 1440 - 1518 - 1816 lm
	15°	2700 K 340EB 122	341EB 122
		3000 K 340EB 123	341EB 123
		4000 K 340EB 125	341EB 125
25°	2700 K	340EB 142	341EB 142
	3000 K	340EB 143	341EB 143
	4000 K	340EB 145	341EB 145
38°	2700 K	340EB 152	341 EB 152
	3000 K	340EB 153	341EB 143
	4000 K	340EB 155	341EB 145

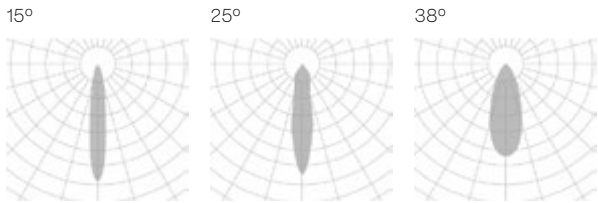


The data shown corresponds to raw values.

- INSTALLATION
- 1 · Pendant
- 3 · Surface
- 7 · Wall surface
- FINISH
- B · Black
- W · White
- G · Black - white
- H · White - black
- DIMM OPTIONS
- O · On-Off
- D · Dali
- P · Push
- V · 1.10v
- Down light



MARTORELL TARREGA

Ø92/Ø85

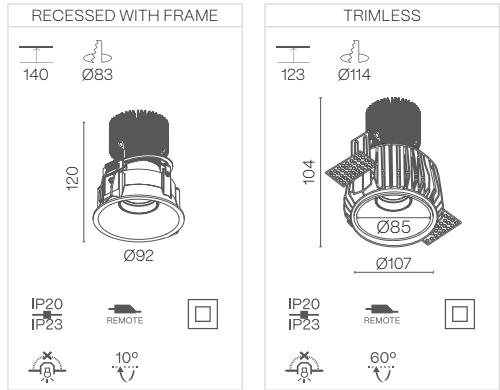


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**
- Special finishes
- Wireless control options

MARTORELL TARREGA

POWER STANDARD

		Ø92/Ø85	
25°	250 mA	8 W 659 - 691 - 719 lm	
	2700 K	342EB 142	
	3000 K	342EB 143	
	4000 K	342EB 145	
30°	2700 K	342EB 152	
	3000 K	342EB 153	
	4000 K	342EB 155	

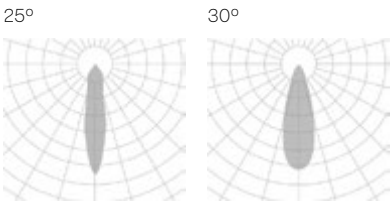


The data shown corresponds to raw values.


- INSTALLATION**
- 5 · Recessed with frame
- 6 · Trimless
- FINISH**
- B · Black
- W · White
- DIMM OPTIONS**
- O · On-Off
- D · Dali
- P · Push
- V · 1.10v
- Down light

MARTORELL TUBULAR


POWER STANDARD




Ø20 - H870 TILT

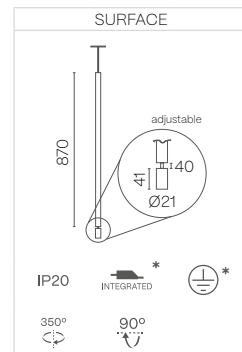

Ø40 - H600

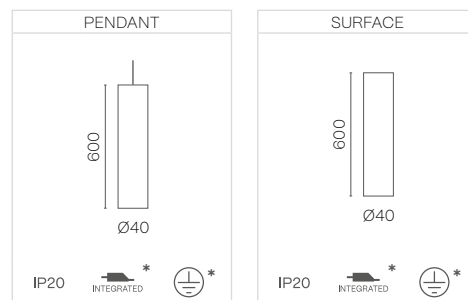

Ø60 - H600

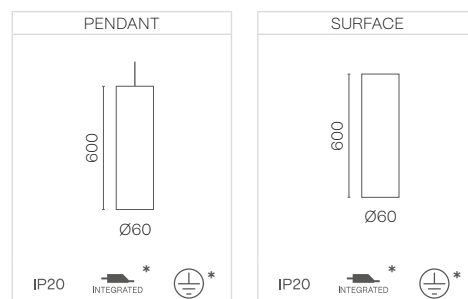


* ELECTRIC CLASS II and DRIVER REMOTE when dimmable.

 ON DEMAND OPTIONS

Special finishes



Wireless control options

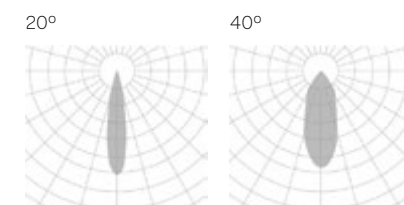

The data shown corresponds to raw values.

INSTALLATION

- 1 · Pendant
3 · Surface

- B** · Black
W · White
G · Black – white
H · White – black

DIMM OPTIONS

- O** · On-Off
D · Dali
P · Push



own light

PATRICIA



ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H



DIM
OPTIONAL



220-240 V
50-60 Hz



Ø45

SURFACE

NEW

RECESSED WITH FRAME

NEW

TRACKLIGHT

NEW

Dimmable drivers are supplied remote.

Ø69

SURFACE

NEW


RECESSED WITH FRAME

NEW

TRACKLIGHT

NEW

Rotation mechanism detail

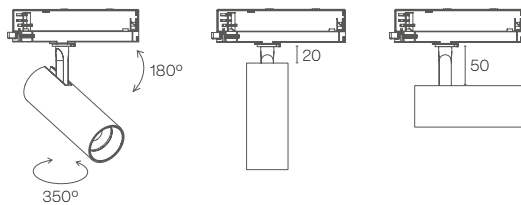

* ELECTRIC CLASS II and DRIVER REMOTE when dimmable.

- Cut hole

Minimum height of the false ceiling

Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**

Special finishes

Wireless control options

- DIMM OPTIONS ONLY TRACKLIGHT**
- O** · On-Off
- D** · Dali
- F** · Phase cut

POWER STANDARD


		Ø45	Ø55			Ø69	Ø82
		250 mA 9 W 1223 – 1239 – 1295 lm	350 mA 12 W 1846 – 1876 – 1964 lm			600 mA 19 W 3235 – 3291 – 3434 lm	1050 mA 35 W 5905 – 6022 – 6477 lm
24°	2700 K	355EB  132 	355EE  132 	15°	2700 K	355EH  122 	355EJ  122 
	3000 K	355EB  133 	355EE  133 		3000 K	355EH  123 	355EJ  123 
	4000 K	355EB  135 	355EE  135 		4000 K	355EH  125 	355EJ  125 
36°	2700 K	355EB  152 	355EE  152 	24°	2700 K	355EH  132 	355EJ  132 
	3000 K	355EB  153 	355EE  153 		3000 K	355EH  133 	355EJ  133 
	4000 K	355EB  155 	355EE  155 		4000 K	355EH  135 	355EJ  135 
50°	2700 K	355EB  162 	355EE  162 	36°	2700 K	355EH  152 	355EJ  152 
	3000 K	355EB  163 	355EE  163 		3000 K	355EH  153 	355EJ  153 
	4000 K	355EB  165 	355EE  165 		4000 K	355EH  155 	355EJ  155 
				50°	2700 K	355EH  162 	355EJ  162 
					3000 K	355EH  163 	355EJ  163 
					4000 K	355EH  165 	355EJ  165 

POWER HIGH

		Ø69
		800 mA 27 W 4507 - 4586 - 4785 lm
	15°	2700 K 355EH 322
	3000 K 355EH 323	4000 K 355EH 325
	24°	2700 K 355EH 332
	36°	2700 K 355EH 352
	3000 K 355EH 353	4000 K 355EH 355
	50°	2700 K 355EH 362
	50°	3000 K 355EH 363
	4000 K 355EH 365	

CLEAR WHITE

		Ø69	Ø69	Ø82
		POWER STANDARD	POWER HIGH	POWER STANDARD
		600 mA 21 W 2738 – 2835 lm	800 mA 27 W 3346 – 3465 lm	1050 mA 37 W 4874 – 5076 lm
15°	3000 K	355EH   12Q 	355EH   32Q 	355EJ   12Q 
	4000 K	355EH   12R 	355EH   32R 	355EJ   12R 
24°	3000 K	355EH   13Q 	355EH   33Q 	355EJ   13Q 
	4000 K	355EH   13R 	355EH   33R 	355EJ   13R 
36°	3000 K	355EH   15Q 	355EH   35Q 	355EJ   15Q 
	4000 K	355EH   15R 	355EH   35R 	355EJ   15R 
50°	3000 K	355EH   16Q 	355EH   36Q 	355EJ   16Q 
	4000 K	355EH   16R 	355EH   36R 	355EJ   16R 

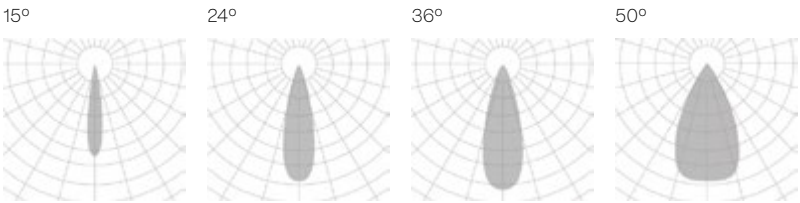

The data shown corresponds to raw values.

- INSTALLATION**

3 · Surface

5 · Recessed with frame

9 · Tracklight
- FINISH**

B · Black

W · White
- DIMM OPTIONS**

O · On-Off

D · Dali

P · Push

V · 1.10v

F · Phase cut

Down light

ACCESORIES

BARN DOOR	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.BD 
	Ø55	ACC30514.02.BD 
	Ø69	ACC30514.03.BD 
	Ø82	ACC30514.04.BD 

HONEY COMB	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.HC 
	Ø55	ACC30514.02.HC 
	Ø69	ACC30514.03.HC 
	Ø82	ACC30514.04.HC 

SNOOT ASYMETRIC	DIMENSIONS	REFERENCE
	Ø45	A355M.01.X0RX 
	Ø55	A355M.02.X0RX 
	Ø69	A355M.03.X0RX 
	Ø82	A355M.04.X0RX 

CROSS RING	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.CR 
	Ø55	ACC30514.02.CR 
	Ø69	ACC30514.03.CR 
	Ø82	ACC30514.04.CR 

SNOOT	DIMENSIONS	REFERENCE
	Ø45	A355M.01.XRRX 
	Ø55	A355M.02.XRRX 
	Ø69	A355M.03.XRRX 
	Ø82	A355M.04.XRRX 

 **FINISH**
B · Black
W · White

OVAL FLOOD LENSE



 LENSE EFFECT .OV.03X60	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.OV.03X60
	Ø55	ACC30514.02.OV.03X60
	Ø69	ACC30514.03.OV.03X60
 LENSE EFFECT .OV.10X40	Ø82	ACC30514.04.OV.03X60


 LENSE EFFECT .OV.60X10	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.OV.60X10
	Ø55	ACC30514.02.OV.60X10
	Ø69	ACC30514.03.OV.60X10
 LENSE EFFECT .OV.15X60	Ø82	ACC30514.04.OV.60X10



 LENSE EFFECT .OV.10X40	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.OV.10X40
	Ø55	ACC30514.02.OV.10X40
	Ø69	ACC30514.03.OV.10X40
 LENSE EFFECT .OV.15X60	Ø82	ACC30514.04.OV.10X40

 LENSE EFFECT .OV.15X60	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.OV.15X60
	Ø55	ACC30514.02.OV.15X60
	Ø69	ACC30514.03.OV.15X60
 LENSE EFFECT .OV.15X60	Ø82	ACC30514.04.OV.15X60

ZOOM SPOT LENSE



 LENSE EFFECT .ZSX1.3	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.ZSX1.3
	Ø55	ACC30514.02.ZSX1.3
	Ø69	ACC30514.03.ZSX1.3
 LENSE EFFECT .ZSX2	Ø82	ACC30514.04.ZSX1.3

 LENSE EFFECT .ZSX1.5	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.ZSX1.5
	Ø55	ACC30514.02.ZSX1.5
	Ø69	ACC30514.03.ZSX1.5
 LENSE EFFECT .ZSX3	Ø82	ACC30514.04.ZSX1.5

 LENSE EFFECT .ZSX2	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.ZSX2
	Ø55	ACC30514.02.ZSX2
	Ø69	ACC30514.03.ZSX2
 LENSE EFFECT .ZSX2	Ø82	ACC30514.04.ZSX2

 LENSE EFFECT .ZSX3	DIMENSIONS	REFERENCE
	Ø45	ACC30514.01.ZSX3
	Ø55	ACC30514.02.ZSX3
	Ø69	ACC30514.03.ZSX3
 LENSE EFFECT .ZSX3	Ø82	ACC30514.04.ZSX3



KLIMT FAMILY

ALUMINIUM
PC

CRI
≥90

IK06

LIFE
50000h

DIM
OPTIONAL



220-240 V
50-60 Hz



KLIMT

Ø75

PENDANT

IP20

INTEGRATED

350°

90°

NEW

SURFACE

IP20

INTEGRATED

350°

90°

RECESSED WITH FRAME

IP20

IP20

REMOTE

350°

90°

TRACKLIGHT

IP20

INTEGRATED

350°

90°

WALL SURFACE

IP20

INTEGRATED

350°

90°

NEW

DIMM 1.10 V electric class II and driver always supplied remote.
Integrated DALI operates at 500 mA.

Ø100

PENDANT

IP20

INTEGRATED

350°

90°

NEW

SURFACE

IP20

INTEGRATED

350°

90°

RECESSED WITH FRAME

IP20

IP20

REMOTE

350°

90°

TRACKLIGHT

IP20

INTEGRATED

350°

90°

WALL SURFACE

IP20

INTEGRATED

350°

90°

NEW

DIMM 1.10 V electric class II and driver always supplied remote.

Ø125

PENDANT

IP20

INTEGRATED

350°

90°

NEW

SURFACE

IP20

INTEGRATED

350°

90°

RECESSED WITH FRAME

IP20

IP20

REMOTE

350°

90°

TRACKLIGHT

IP20

INTEGRATED

350°

90°

WALL SURFACE

IP20

INTEGRATED

350°

90°

NEW

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- ON DEMAND OPTIONS**
- Special finishes
- Wireless control options

- DIMM OPTIONS ONLY TRACKLIGHT**
- O** · On-Off
- D** · Dali
- F** · Phase cut

KLIMT

POWER STANDARD

		Ø75	Ø100	Ø125
		700 mA 6 W 822 – 840 – 875 lm	350 mA 12 W 1735 – 1766 – 1844 lm	700 mA 23 W 3549 – 3611 – 3769 lm
15°	2700 K	320EB 122	320EE 122	320EH 122
	3000 K	320EB 123	320EE 123	320EH 123
	4000 K	320EB 125	320EE 125	320EH 125
24°	2700 K	320EB 132	320EE 132	320EH 132
	3000 K	320EB 133	320EE 133	320EH 133
	4000 K	320EB 145	320EE 135	320EH 135
38°	2700 K	320EB 152	320EE 152	320EH 152
	3000 K	320EB 153	320EE 153	320EH 153
	4000 K	320EB 155	320EE 155	320EH 155
60°	2700 K	-	320EE 172	320EH 172
	3000 K	-	320EE 173	320EH 173
	4000 K	-	320EE 175	320EH 175

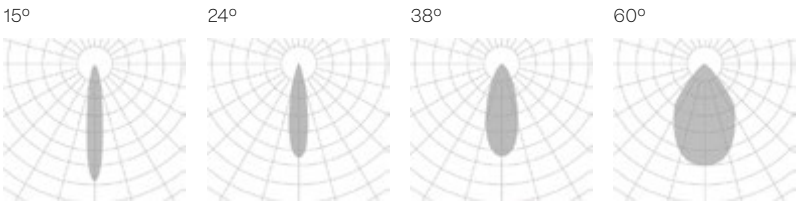

The data shown corresponds to raw values.

- INSTALLATION**
- 1 · Pendant
- 3 · Surface
- 5 · Recessed with frame
- 7 · Wall surface
- 9 · Tracklight

FINISH

B · Black

W · White

DIMM OPTIONS

O · On-Off

D · Dali

P · Push

V · 1.10v

F · Phase cut

Down light

KLIMT FIX

Ø75

PENDANT

Ø75

IP20 INTEGRATED

NEW

SURFACE

Ø75

IP20 INTEGRATED

RECESSED WITH FRAME

80 Ø75

46 Ø83

IP20 IP23 REMOTE

WALL SURFACE

Ø77

IP20 INTEGRATED

NEW

DIMM 1.10 V electric class II and driver always supplied remote.
Integrated DALI operates at 500 mA.

Ø100

PENDANT

Ø100

IP20 INTEGRATED

NEW

SURFACE

Ø100

IP20 INTEGRATED

RECESSED WITH FRAME

80 Ø100

50 Ø108

IP20 IP23 REMOTE

WALL SURFACE

Ø102

IP20 INTEGRATED

NEW

DIMM 1.10 V electric class II and driver always supplied remote.

Ø125

PENDANT

Ø125

IP20 INTEGRATED

NEW

SURFACE

Ø125

IP20 INTEGRATED

RECESSED WITH FRAME

85 Ø125

72 Ø135

IP20 IP23 REMOTE

WALL SURFACE

Ø127

IP20 INTEGRATED

NEW

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS


 Special finishes
- Wireless control options

KLIMT FIX

POWER STANDARD

		Ø75	
	700 mA	6 W 822 – 840 – 875 lm	
	15°	2700 K 321EB 122	
	3000 K 321EB 123		
24°	4000 K 321EB 125		
	2700 K 321EB 132		
	3000 K 321EB 133		
38°	4000 K 321EB 135		
	2700 K 321EB 152		
	3000 K 321EB 153		
	4000 K 321EB 155		

		Ø100		Ø125	
	350 mA	12 W 1735 – 1766 – 1844 lm		700 mA	23 W 3549 – 3611 – 3769 lm
	15°	2700 K 321EE 122		2700 K 321EH 122	
	3000 K 321EE 123			3000 K 321EH 123	
25°	4000 K 321EE 125			4000 K 321EH 125	
	2700 K 321EE 142			2700 K 321EH 132	
	3000 K 321EE 143			3000 K 321EH 133	
38°	4000 K 321EE 145			4000 K 321EH 135	
	2700 K 321EE 152			2700 K 321EH 152	
	3000 K 321EE 153			3000 K 321EH 153	
60°	4000 K 321EE 155			4000 K 321EH 155	
	2700 K 321EE 172			2700 K 321EH 172	
	3000 K 321EE 173			3000 K 321EH 173	
	4000 K 321EE 175			4000 K 321EH 175	

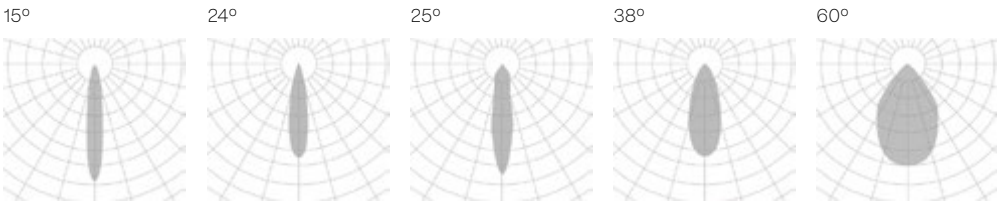

The data shown corresponds to raw values.

- INSTALLATION

1 · Pendant

3 · Surface

5 · Recessed with frame

7 · Wall surface
- FINISH

B · Black

W · White
- DIMM OPTIONS

O · On-Off

D · Dali

P · Push
- Down light

CUBE FAMILY



ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H



DIM
OPTIONAL

INDOOR

220-240 V
50-60 Hz

CE

CUBE

CUBE

PENDANT

IP20
INTEGRATED

NEW

SURFACE

IP20
INTEGRATED

RECESSED WITH FRAME

IP20
IP23
REMOTE

350°
10°

TRIMLESS

IP20
IP23
REMOTE

350°
10°

TRACKLIGHT

IP20
INTEGRATED

NEW

WALL SURFACE

IP20
INTEGRATED

NEW

CUBE DOUBLE

PENDANT

IP20
INTEGRATED

NEW

SURFACE

IP20
INTEGRATED

RECESSED WITH FRAME

IP20
IP23
REMOTE

350°
10°

TRIMLESS

IP20
IP23
REMOTE

350°
10°

WALL SURFACE

IP20
INTEGRATED

NEW

CUBE TRIPLE

PENDANT

IP20
INTEGRATED

NEW

SURFACE

IP20
INTEGRATED

RECESSED WITH FRAME

IP20
IP23
REMOTE

350°
10°

TRIMLESS

IP20
IP23
REMOTE

350°
10°

WALL SURFACE

IP20
INTEGRATED

NEW

- Cut hole

Minimum height of the false ceiling

Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS

Special finishes

Wireless control options

CUBE

POWER STANDARD

		CUBE	CUBE DOUBLE	CUBE TRIPLE
24°	250 mA	8 W 1347 - 1369 - 1432 lm	16 W 2692 - 2738 - 2864 lm	24 W 4038 - 4107 - 4296 lm
	2700 K	309EB 132	310EE 132	311EH 132
	3000 K	309EB 133	310EE 133	311EH 133
	4000 K	309EB 135	310EE 135	311EH 135
36°	2700 K	309EB 152	310EE 152	311EH 152
	3000 K	309EB 153	310EE 153	311EH 153
	4000 K	309EB 155	310EE 155	311EH 155
60°	2700 K	309EB 172	310EE 172	311EH 172
	3000 K	309EB 173	310EE 173	311EH 173
	4000 K	309EB 175	310EE 175	311EH 175

HIGH STANDARD

		CUBE	CUBE DOUBLE	CUBE TRIPLE
24°	500 mA	17 W 2316 - 2354 - 2464 lm	34 W 4630 - 4708 - 4928 lm	51 W 6945 - 7062 - 7392 lm
	2700 K	309EB 332	310EE 332	311EH 332
	3000 K	309EB 333	310EE 333	311EH 333
	4000 K	309EB 335	310EE 335	311EH 335
36°	2700 K	309EB 352	310EE 352	311EH 352
	3000 K	309EB 353	310EE 353	311EH 353
	4000 K	309EB 355	310EE 355	311EH 355
60°	2700 K	309EB 372	310EE 372	311EH 372
	3000 K	309EB 373	310EE 373	311EH 373
	4000 K	309EB 375	310EE 375	311EH 375



The data shown corresponds to raw values.

- INSTALLATION

1 · Pendant
3 · Surface
5 · Recessed with frame
6 · Trimless
7 · Wall surface
9 · Tracklight
- FINISH


B · Black
W · White
G · Black - white
H · White - black
- DIMM OPTIONS

O · On-Off
D · Dali
P · Push
- Down light

CUBE TUBE

H185

PENDANT



185
Ø86

IP20 INTEGRATED


SURFACE



185
Ø86

IP20 INTEGRATED

TRACKLIGHT




185
Ø86

IP20 INTEGRATED

H350


PENDANT



350
Ø86

IP20 INTEGRATED


SURFACE



350
Ø86

IP20 INTEGRATED

TRACKLIGHT




350
Ø86

IP20 INTEGRATED

H175

PENDANT



175
Ø120

IP20 INTEGRATED

SURFACE



175
Ø120


IP20 INTEGRATED

ON DEMAND OPTIONS

-  Special finishes
-  Wireless control options

H250

PENDANT



250
Ø86

IP20 INTEGRATED


SURFACE



250
Ø86

IP20 INTEGRATED

TRACKLIGHT




250
Ø86

IP20 INTEGRATED

H450


PENDANT



450
Ø86

IP20 INTEGRATED


SURFACE



450
Ø86

IP20 INTEGRATED

TRACKLIGHT



450
Ø86

IP20 INTEGRATED


CUBE TUBE

POWER STANDARD

		H185	H250	H350	H450
24°	250 mA	8 W 1358 – 1380 – 1445 lm	8 W 1358 – 1380 – 1445 lm	8 W 1358 – 1380 – 1445 lm	8 W 1358 – 1380 – 1445 lm
	2700 K	312EB 132	312EE 132	312EH 132	312EJ 142
	3000 K	312EB 133	312EE 133	312EH 133	312EJ 133
	4000 K	312EB 135	312EE 135	312EH 135	312EJ 135
40°	2700 K	312EB 152	312EE 152	312EH 152	312EJ 152
	3000 K	312EB 153	312EE 153	312EH 153	312EJ 153
	4000 K	312EB 155	312EE 155	312EH 155	312EJ 155
60°	2700 K	312EB 172	312EE 172	312EH 172	312EJ 172
	3000 K	312EB 173	312EE 173	312EH 173	312EJ 173
	4000 K	312EB 175	312EE 175	312EH 175	312EJ 175

POWER STANDARD

		H175	
24°	500 mA	16 W 2720 – 2767 – 2888 lm	
	2700 K	313EB 132	
	3000 K	313EB 133	
	4000 K	313EB 135	
40°	2700 K	313EB 152	
	3000 K	313EB 153	
	4000 K	313EB 155	
60°	2700 K	313EB 172	
	3000 K	313EB 173	
	4000 K	313EB 175	

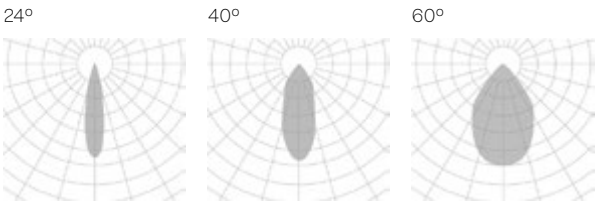

The data shown corresponds to raw values.


- INSTALLATION

1 · Pendant
3 · Surface
9 · Tracklight
- FINISH

B · Black
W · White
G · Black – white
H · White – black
- DIMM OPTIONS

O · On–Off
D · Dali
P · Push
- Down light

LUK FAMILY

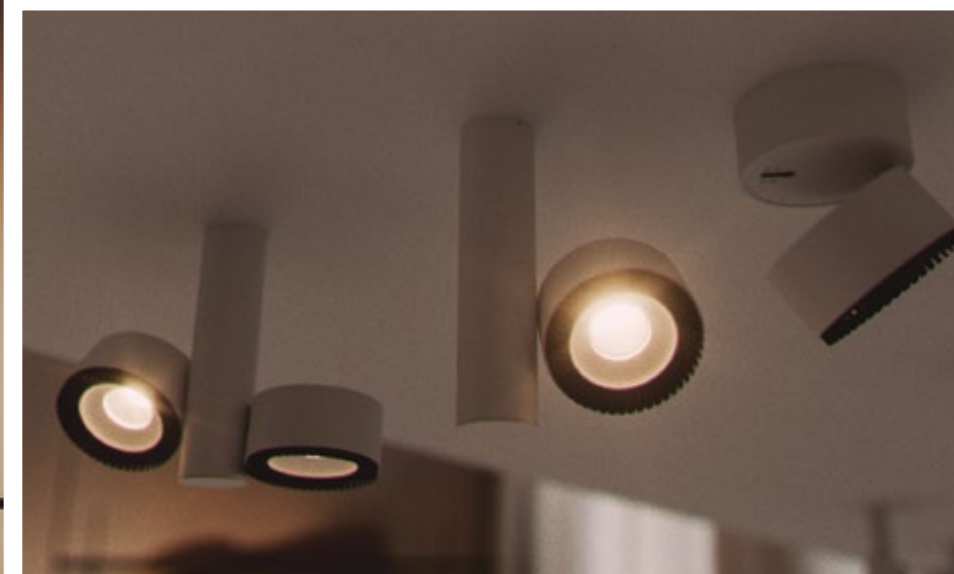

ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000h



DIM
OPTIONAL



220-240 V
50-60 Hz

CE

LUK CRUSADER

Ø120

PENDANT

IP20

INTEGRATED

350°

90°

NEW

SURFACE

IP20

INTEGRATED

350°

90°

TRACKLIGHT

IP20

INTEGRATED


350°

90°

POWER STANDARD

		Ø120	
24°	500 mA	18 W 2273 - 2386 - 2410 lm	
	2700 K	330EB 132	
	3000 K	330EB 133	
	4000 K	330EB 135	
40°	2700 K	330EB 152	
	3000 K	330EB 153	
	4000 K	330EB 155	
60°	2700 K	330EB 172	
	3000 K	330EB 173	
	4000 K	330EB 175	


Rotation mechanism detail



24°



40°



60°



The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS
- Wireless control options
- Down light

- INSTALLATION
- 1 · Pendant
- 3 · Surface
- 9 · Tracklight

- FINISH
- B · Black
- W · White
- H · White – black

- DIMM OPTIONS
- O · On–Off
- D · Dali
- P · Push

LUK HAWKEYE

HAWKEYE

SURFACE

IP20

INTEGRATED

350°

TRACKLIGHT

IP20

INTEGRATED

180°

HAWKEYE DOUBLE

SURFACE

IP20

INTEGRATED

350°

TRACKLIGHT

IP20


INTEGRATED

180°

POWER STANDARD

		HAWKEYE	HAWKEYE DOUBLE
24°	500 mA	18 W 2273 - 2386 - 2410 lm	36 W 4546 - 4772 - 4820 lm
	2700 K	331EB 132	332EB 132
	3000 K	331EB 133	332EB 133
	4000 K	331EB 135	332EB 135
40°	2700 K	331EB 152	332EB 152
	3000 K	331EB 153	332EB 153
	4000 K	331EB 155	332EB 155
60°	2700 K	331EB 172	332EB 172
	3000 K	331EB 173	332EB 173
	4000 K	331EB 175	332EB 175


Rotation mechanism detail



24°



40°



60°



The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- ON DEMAND OPTIONS
- Wireless control options
- Down light

- INSTALLATION
- 3 · Surface
- 9 · Tracklight

- FINISH
- B · Black
- W · White
- H · White – black

- DIMM OPTIONS
- O · On–Off
- D · Dali
- P · Push

ORACLE

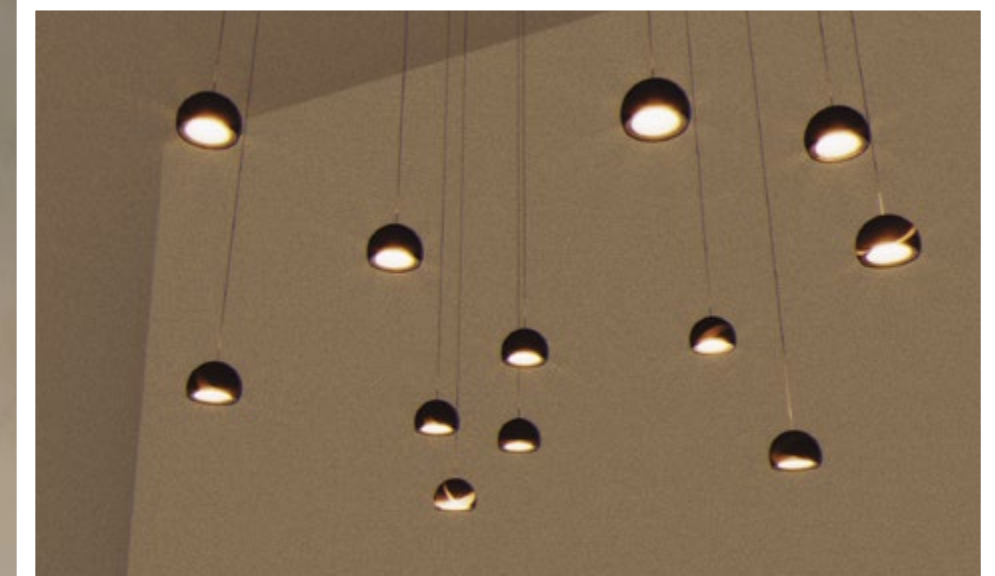

ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H



DIM
OPTIONAL




220-240 V
50-60 Hz






ORACLE

Ø132

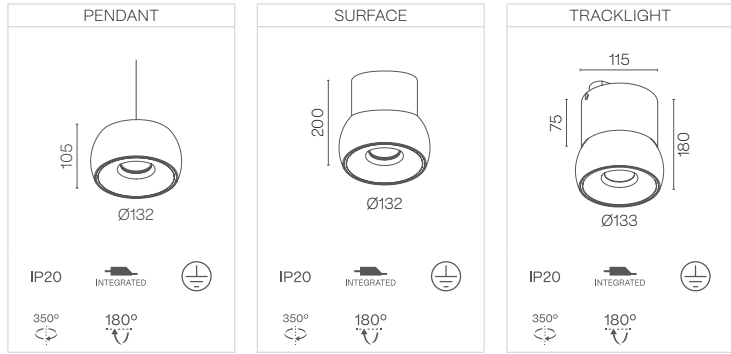

Rotation mechanism detail




- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Special finishes
- Wireless control options

ORACLE

POWER STANDARD

		Ø132	
	500 mA	18 W 2273 - 2386 - 2410 lm	
	2700 K	354EB 132	
	3000 K	354EB 133	
24°	4000 K	354EB 135	
	2700 K	354EB 152	
	3000 K	354EB 153	
40°	4000 K	354EB 155	
	2700 K	354EB 172	
	3000 K	354EB 173	
60°	4000 K	354EB 175	

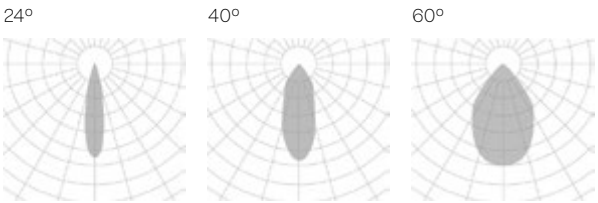

The data shown corresponds to raw values.

- INSTALLATION**
- FINISH**
- DIMM OPTIONS**
- Down light

LENT FAMILY



ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H



DIM
OPTIONAL



220-240 V
50-60 Hz

CE

LENT MODULAR – ROUND VERSION

1 LENS

PENDANT

80
29 34

IP40 REMOTE

NEW

SURFACE

80
29 34

IP40 REMOTE

NEW

RECESSED WITH FRAME

105 38 x 40
55 47

IP20 IP43 REMOTE

TRIMLESS

77 57 x 45
67 38 43

IP20 IP43 REMOTE

WALL SURFACE

57 81,5
29

IP40 REMOTE

NEW

3 LENSES

PENDANT

80
80 34

IP40 REMOTE

NEW

SURFACE

80
80 34

IP40 REMOTE

NEW

RECESSED WITH FRAME

105 90 x 40
55 99 48

IP20 IP43 REMOTE

TRIMLESS

77 96 x 45
67 91 43

IP20 IP43 REMOTE

WALL SURFACE

57 81,5
80

IP40 REMOTE

NEW

5 LENSES

PENDANT

80
132 34

IP40 REMOTE

NEW

SURFACE

80
132 34

IP40 REMOTE

NEW

RECESSED WITH FRAME

105 142 x 40
55 151 48

IP20 IP43 REMOTE

TRIMLESS

77 148 x 45
67 143 43

IP20 IP43 INTEGRATED

WALL SURFACE

57 81,5
132

IP40 REMOTE

NEW

10 LENSES

PENDANT

80
262 34

IP40 REMOTE

NEW

SURFACE

80
262 34

IP40 REMOTE

NEW

RECESSED WITH FRAME

105 272 x 40
55 281 48

IP20 IP43 REMOTE

TRIMLESS

77 275 x 45
67 270 43

IP20 IP43 INTEGRATED

WALL SURFACE

57 81,5
262

IP40 REMOTE

NEW

- Cut hole

Minimum height of the false ceiling

Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**

Special finishes

Wireless control options


Tracklight installation

Product length without cover kit
Length cover kit: 3 mm

LENT MODULAR – ROUND VERSION

POWER STANDARD

		1 LENS	3 LENSES	5 LENSES	10 LENSES
20°	700 mA	2 W 189 – 216 – 232 lm	6 W 566 – 647 – 697 lm	10 W 982 – 1079 – 1161 lm	20 W 1885 – 2158 – 2322 lm
	2700 K	324EB 132	324EH 132	324EL 132	324EV 132
	3000 K	324EB 133	324EH 133	324EL 133	324EV 133
40°	4000 K	324EB 135	324EH 135	324EL 135	324EV 135
	2700 K	324EB 152	324EH 152	324EL 152	324EV 152
	3000 K	324EB 153	324EH 153	324EL 153	324EV 153
60°	4000 K	324EB 155	324EH 155	324EL 155	324EV 155
	2700 K	324EB 172	324EH 172	324EL 172	324EV 172
	3000 K	324EB 173	324EH 173	324EL 173	324EV 173
	4000 K	324EB 175	324EH 175	324EL 175	324EV 175

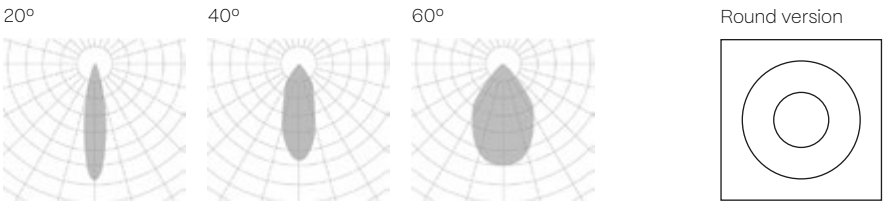

The data shown corresponds to raw values.

- INSTALLATION**

1 · Pendant

3 · Surface

5 · Recessed with frame

6 · Trimless

7 · Wall surface
- FINISH**

B · Black

W · White

G · Black – white

H · White – black
- DIMM OPTIONS**

O · On–Off

D · Dali

P · Push
- Down light

LENT MODULAR – SQUARE VERSION

1 LENS

PENDANT

80
29 34

IP40 REMOTE

NEW

SURFACE

80
29 34

IP40 REMOTE

NEW

RECESSED WITH FRAME

105 38 x 40
55 47

IP20 IP43 REMOTE

TRIMLESS

77 57 x 45
38 43

IP20 IP43 REMOTE

WALL SURFACE

57 81,5
29

IP40 REMOTE

NEW

3 LENSES

PENDANT

80
80 34

IP40 REMOTE

NEW

SURFACE

80
80 34

IP40 REMOTE

NEW

RECESSED WITH FRAME

105 90 x 40
55 99 48

IP20 IP43 REMOTE

TRIMLESS

77 96 x 45
91 43

IP20 IP43 REMOTE

WALL SURFACE

57 81,5
80

IP40 REMOTE

NEW

5 LENSES

PENDANT

80
132 34

IP40 REMOTE

NEW

SURFACE

80
132 34

IP40 REMOTE

NEW

RECESSED WITH FRAME

105 142 x 40
55 151 48

IP20 IP43 REMOTE

TRIMLESS

77 148 x 45
143 43

IP20 IP43 INTEGRATED

WALL SURFACE

57 81,5
132

IP40 REMOTE

NEW

10 LENSES

PENDANT

80
262 34

IP40 REMOTE

NEW

SURFACE

80
262 34

IP40 REMOTE

NEW

RECESSED WITH FRAME

105 272 x 40
55 281 48

IP20 IP43 REMOTE

TRIMLESS

77 275 x 45
270 43

IP20 IP43 INTEGRATED

WALL SURFACE

57 81,5
262

IP40 REMOTE

NEW

Cut hole

Minimum height of the false ceiling

Luminaire not suitable to be covered with thermal insulating material

ON DEMAND OPTIONS

Special finishes

Wireless control options

Tracklight Installation


Product length without cover kit

Length cover kit: 3 mm

LENT MODULAR – SQUARE VERSION

POWER STANDARD

		1 LENS	3 LENSES	5 LENSES	10 LENSES
20°	700 mA	2 W 189 – 216 – 232 lm	6 W 566 – 647 – 697 lm	10 W 982 – 1079 – 1161 lm	20 W 1885 – 2158 – 2322 lm
	2700 K	325EB 132	325EH 132	325EL 132	325EV 132
	3000 K	325EB 133	325EH 133	325EL 133	325EV 133
40°	4000 K	325EB 135	325EH 135	325EL 135	325EV 135
	2700 K	325EB 152	325EH 152	325EL 152	325EV 152
	3000 K	325EB 153	325EH 153	325EL 153	325EV 153
60°	4000 K	325EB 155	325EH 155	325EL 155	325EV 155
	2700 K	325EB 172	325EH 172	325EL 172	325EV 172
	3000 K	325EB 173	325EH 173	325EL 173	325EV 173
	4000 K	325EB 175	325EH 175	325EL 175	325EV 175

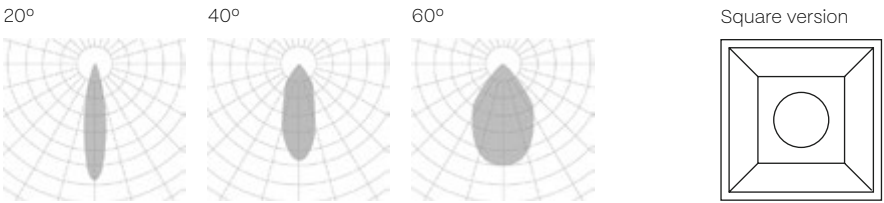

The data shown corresponds to raw values.

INSTALLATION

1 · Pendant

3 · Surface

5 · Recessed with frame

6 · Trimless

7 · Wall surface

FINISH

B · Black

W · White

G · Black – white

H · White – black

DIMM OPTIONS

O · On-Off


D · Dali

P · Push


Down light

LENT MOTION – ROUND VERSION


3 LENSES

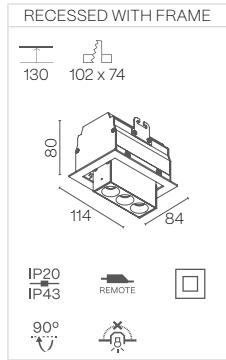

5 LENSES

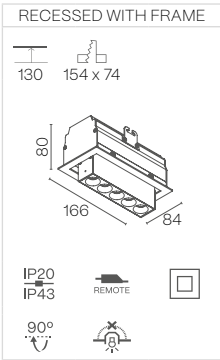


10 LENSES

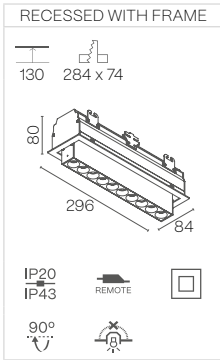

POWER STANDARD

		3 LENSES	5 LENSES	10 LENSES
20°	700 mA	6 W 566 – 647 – 697 lm	10 W 982 – 1079 – 1161 lm	20 W 1885 – 2158 – 2322 lm
	2700 K	326EH5 132	326EL5 132	326EV5 132
	3000 K	326EH5 133	326EL5 133	326EV5 133
	4000 K	326EH5 135	326EL5 135	326EV5 135
40°	2700 K	326EH5 152	326EL5 152	326EV5 152
	3000 K	326EH5 153	326EL5 153	326EV5 153
	4000 K	326EH5 155	326EL5 155	326EV5 155
60°	2700 K	326EH5 172	326EL5 172	326EV5 172
	3000 K	326EH5 173	326EL5 173	326EV5 173
	4000 K	326EH5 175	326EL5 175	326EV5 175

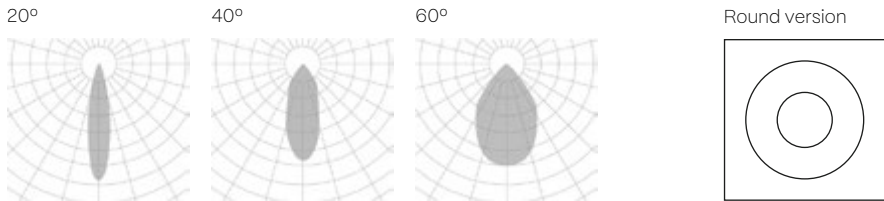

The data shown corresponds to raw values.

- FINISH**

 - B · Black
 - W · White
 - G · Black – white
 - H · White – black
- DIMM OPTIONS**

 - O · On–Off
 - D · Dali
 - P · Push
- Cut hole


Minimum height of the false ceiling

Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**


 - Special finishes
 - Wireless control options
- Down light

LENT MOTION – SQUARE VERSION


3 LENSES

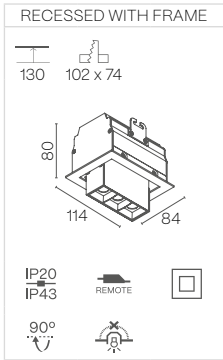

5 LENSES

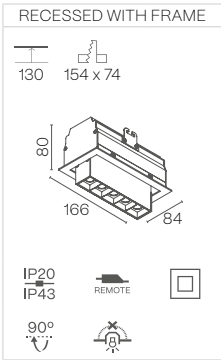


10 LENSES

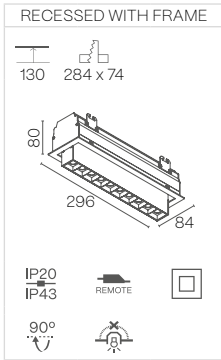

POWER STANDARD

		3 LENSES	5 LENSES	10 LENSES
20°	700 mA	6 W 566 – 647 – 697 lm	10 W 982 – 1079 – 1161 lm	20 W 1885 – 2158 – 2322 lm
	2700 K	327EH5 132	327EL5 132	327EV5 132
	3000 K	327EH5 133	327EL5 133	327EV5 133
	4000 K	327EH5 135	327EL5 135	327EV5 135
40°	2700 K	327EH5 152	327EL5 152	327EV5 152
	3000 K	327EH5 153	327EL5 153	327EV5 153
	4000 K	327EH5 155	327EL5 155	327EV5 155
60°	2700 K	327EH5 172	327EL5 172	327EV5 172
	3000 K	327EH5 173	327EL5 173	327EV5 173
	4000 K	327EH5 175	327EL5 175	327EV5 175

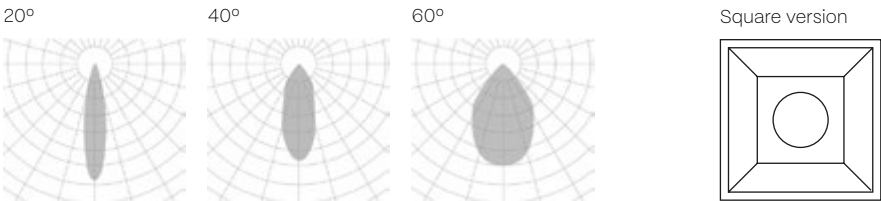

The data shown corresponds to raw values.

- FINISH**

 - B · Black
 - W · White
 - G · Black – white
 - H · White – black
- DIMM OPTIONS**

 - O · On–Off
 - D · Dali
 - P · Push
- Cut hole

Minimum height of the false ceiling


Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**

 - Special finishes
 - Wireless control options
- Down light


ASTRA




Ø12

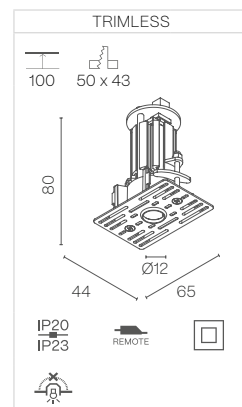


Ø22

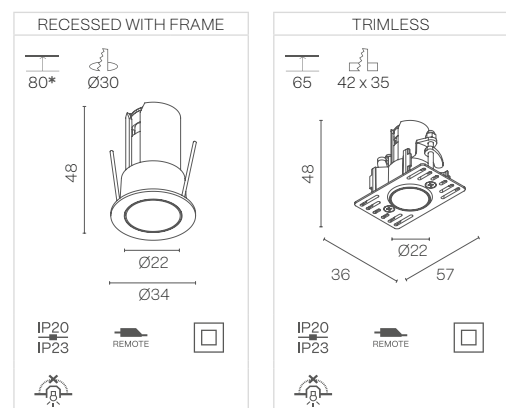

Ø30

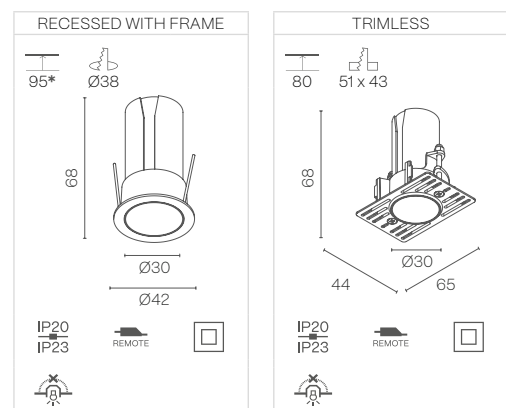

* 115 mm when dimmable




POWER STANDARD



		Ø12	Ø22	Ø30
	700 mA	700 mA 3 W 251 - 296 - 319 lm	700 mA 3 W 264 - 278 - 328 lm	300 mA 5 W 710 - 736 - 751 lm
20°	2700 K	-	302EE   132 	302EH   132 
	3000 K	-	302EE   133 	302EH   133 
	4000 K	-	302EE   135 	302EH   135 
30°	2700 K	302EE6  132 	-	302EH   132 
	3000 K	302EE6  133 	-	302EH   133 
	4000 K	302EE6  135 	-	302EH   135 
50°	2700 K	302EB6  162 	302EE   162 	302EH   162 
	3000 K	302EB6  163 	302EE   163 	302EH   163 
	4000 K	302EB6  165 	302EE   165 	302EH   165 


		Ø12
	700 mA	3 W 140 - 147 - 155 lm
10°	2700 K	302EB6  112 
	3000 K	302EB6  113 
	4000 K	302EB6  115 

		Ø12
	700 mA	3 W 249 - 262 - 275 lm
Asymetric	2700 K	302EB6  182 
	3000 K	302EB6  183 
	4000 K	302EB6  185 

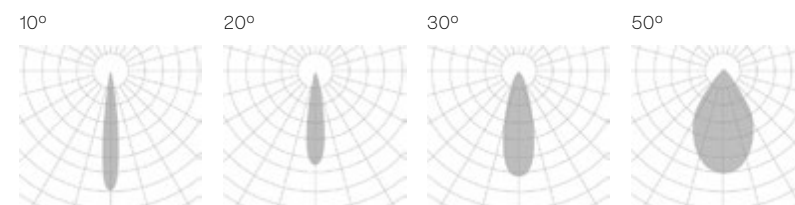

The data shown corresponds to raw values.




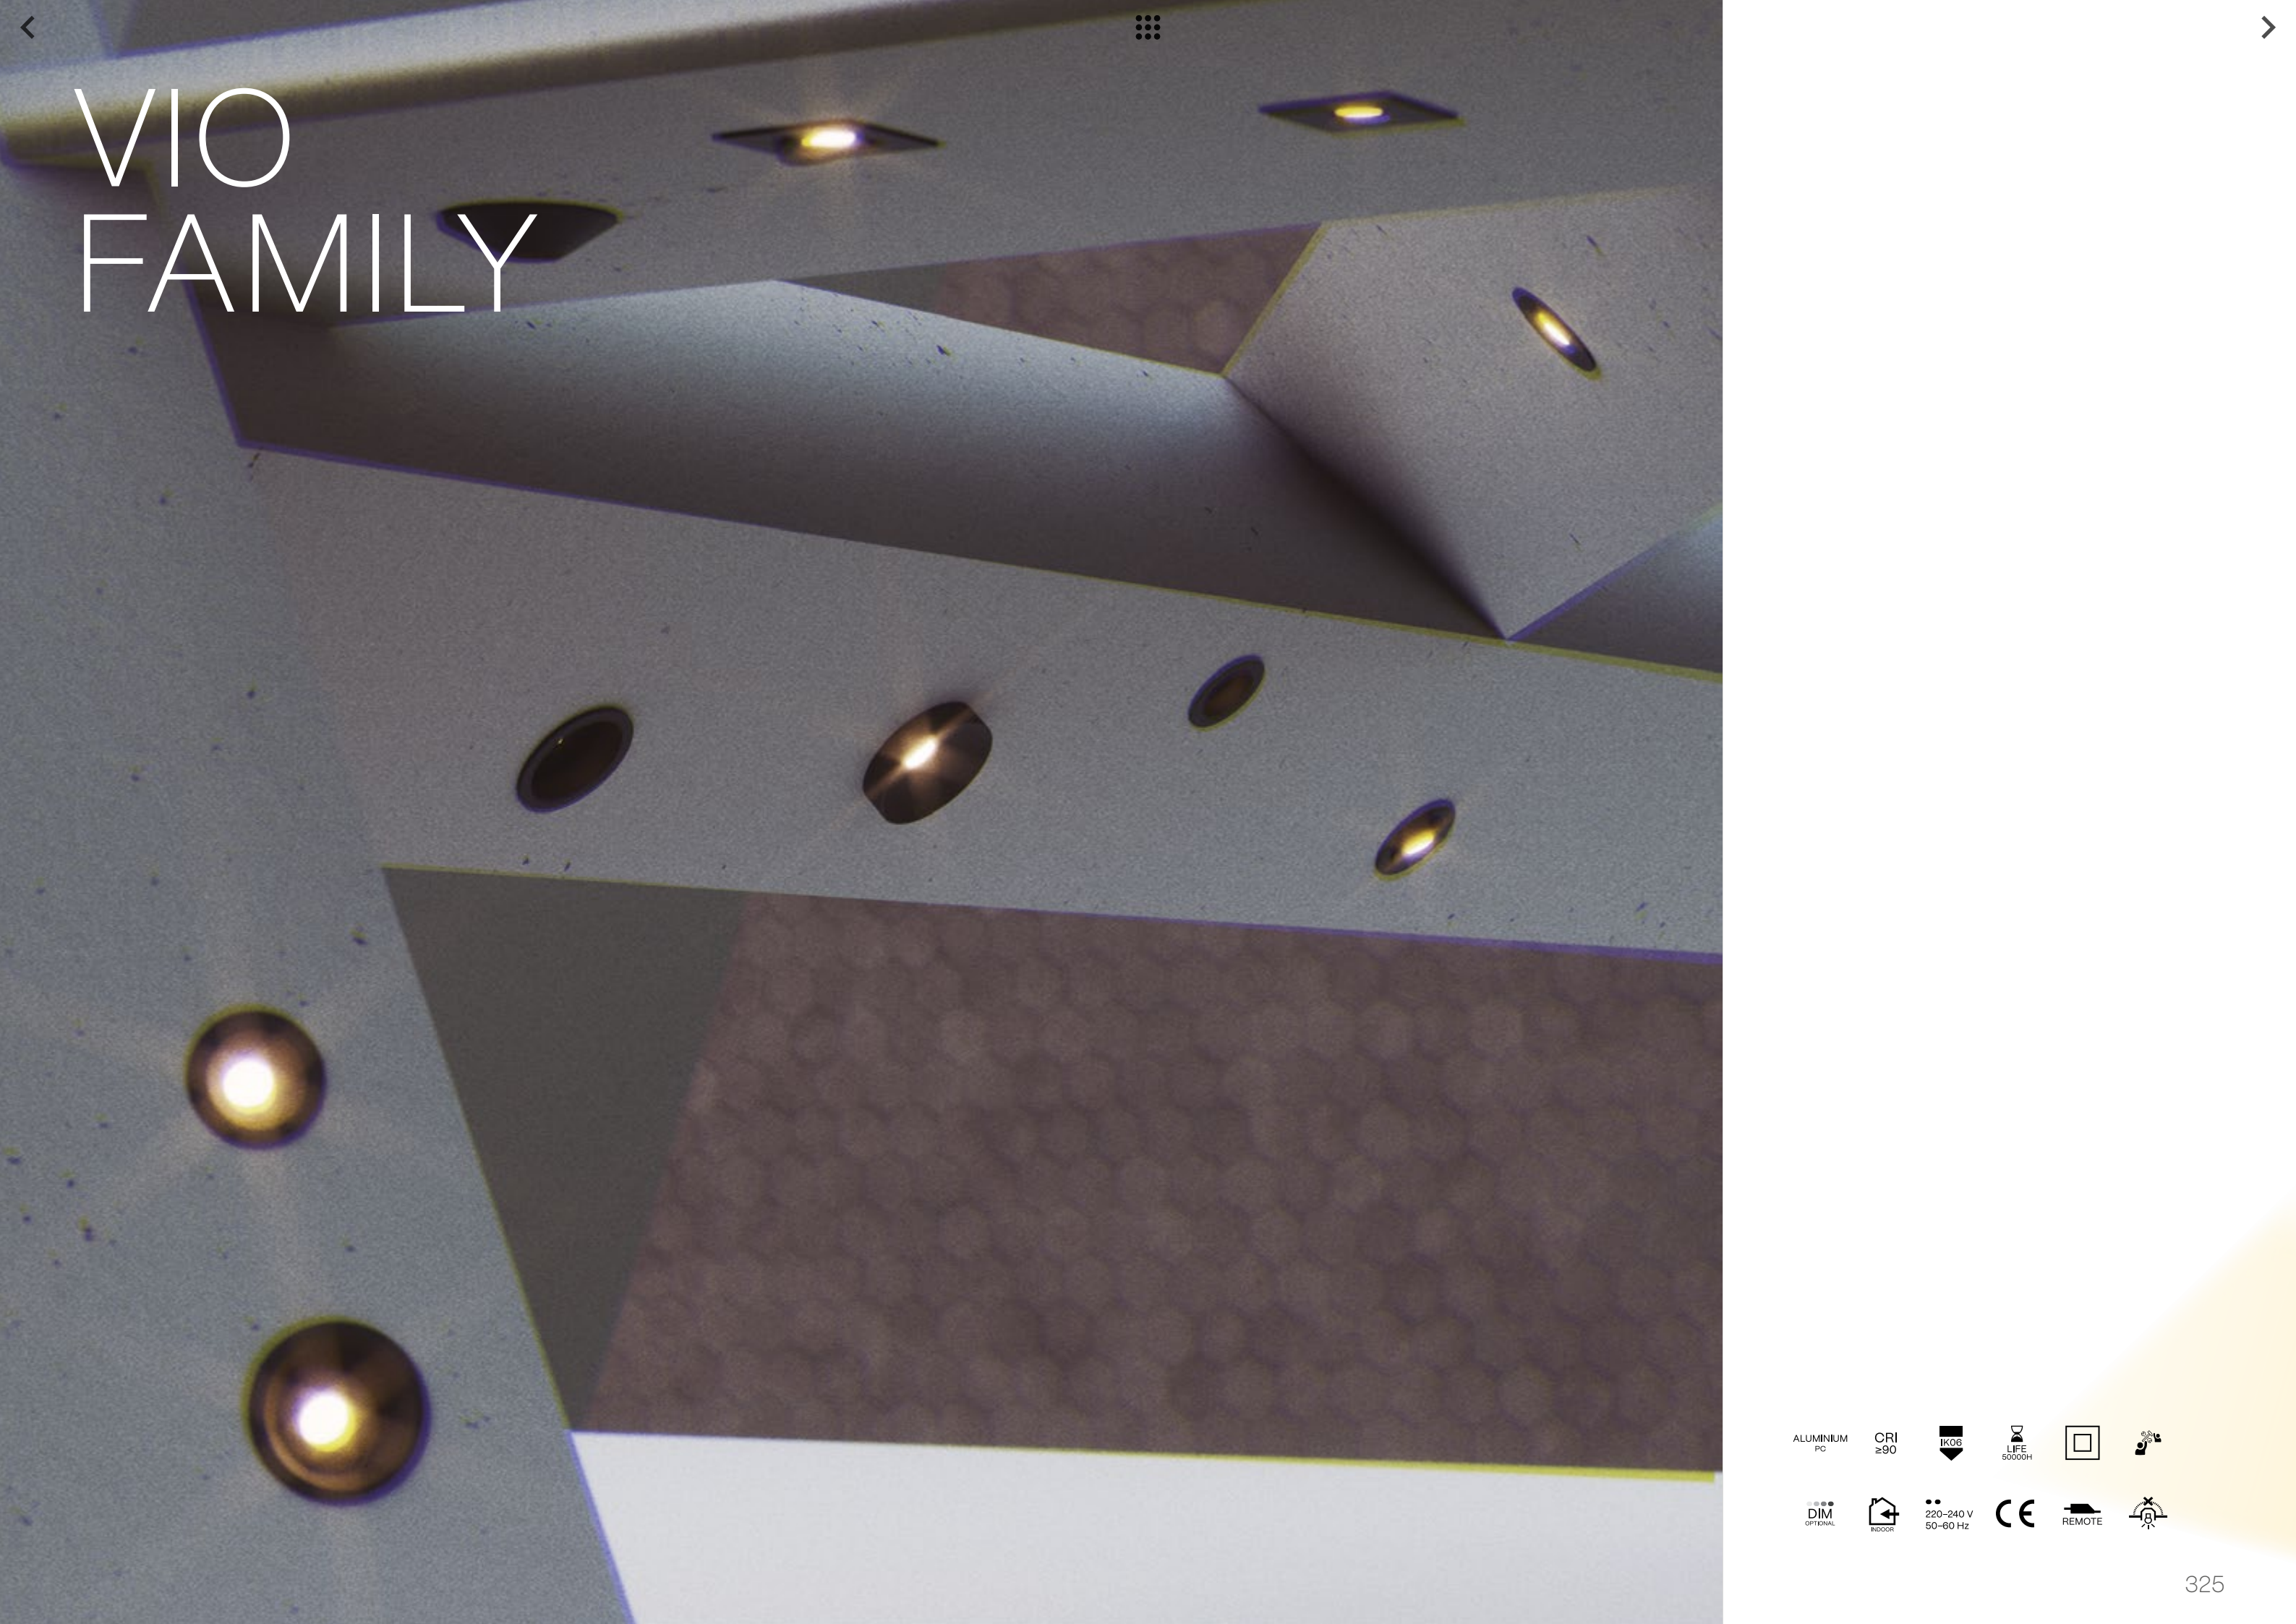


VIO FAMILY

- ALUMINIUM
PC
- CRI
≥90
- IK08
- LIFE
50000h
-
-
- DIM
OPTIONAL
- INDOOR
- 220-240 V
50-60 Hz
- CE
- REMOTE
-


FRAMES

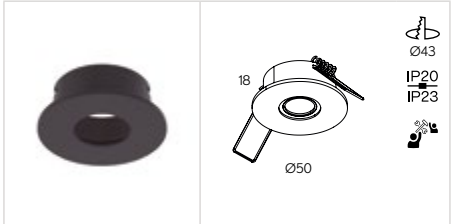

VIO 370

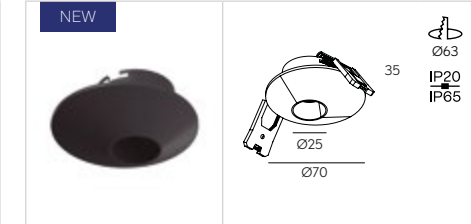


VIO ASYMETRIC 371

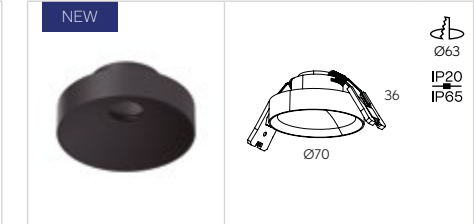


VIO COMPACT 372




VIO DEEP 373

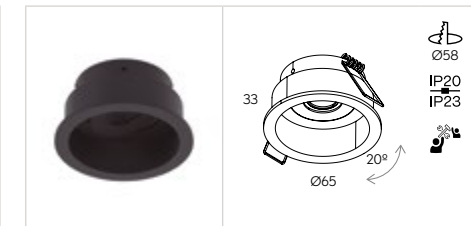


VIO DEEP MOVE 374

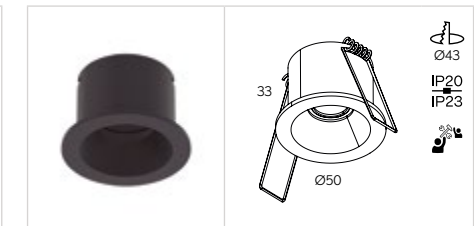


VIO DOME 375

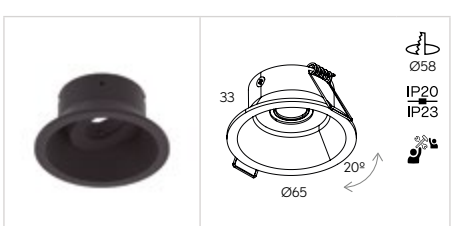


VIO DOME MOVE 376

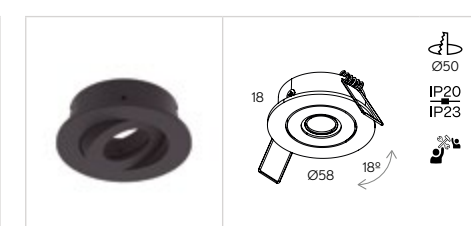

VIO MOVE 378

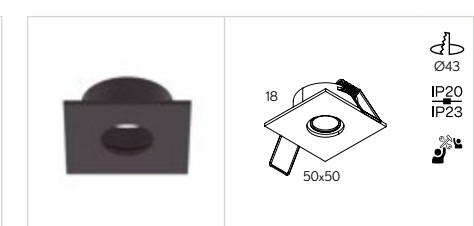

VIO SQ 379

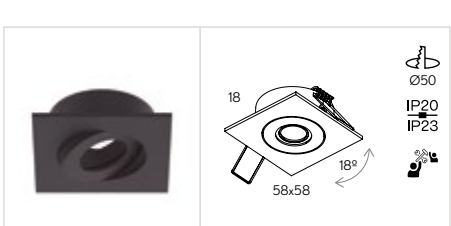


VIO SQUARE MOVE 380


IP65 on demand


VIO LED

POWER STANDARD



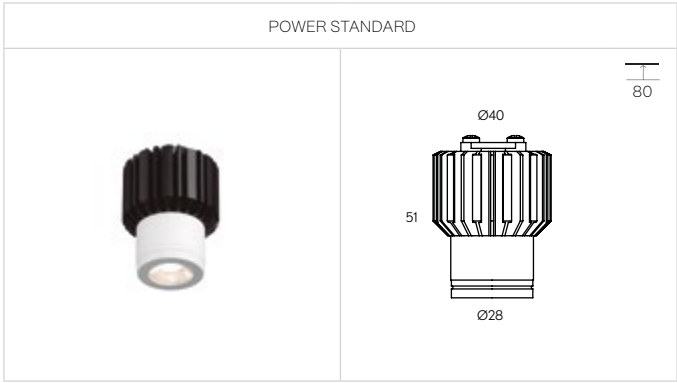







POWER HIGH





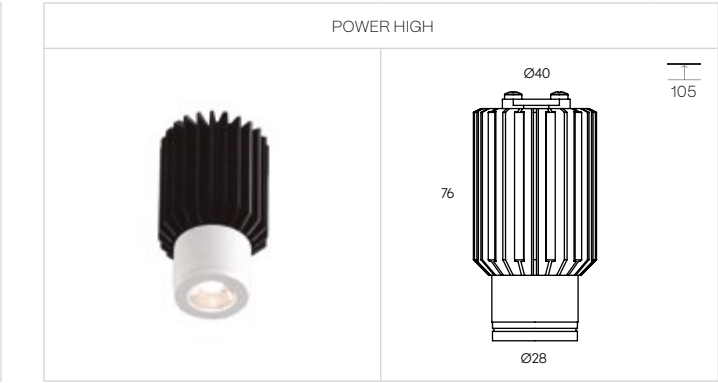





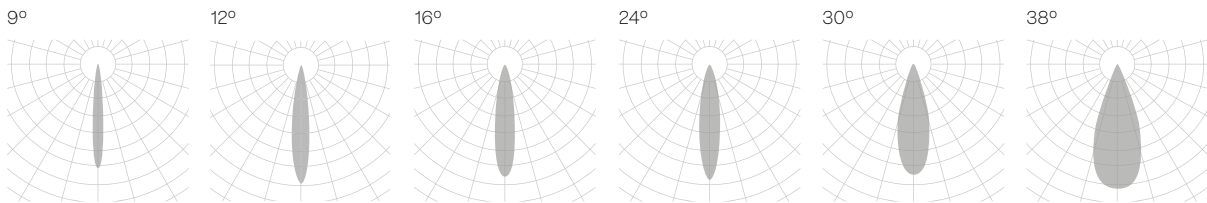


TECHNICAL DATA

						
	250 mA	3 W 355 – 395 – 411 lm	3 W 355 – 395 – 411 lm	3 W 355 – 395 – 411 lm	3 W 355 – 395 – 411 lm	3 W 355 – 395 – 411 lm
POWER STANDARD	2700 K	370EB5 1 2	371EB5 1 2	372EB5 1 2	373EB5 1 2	374EB5 1 2
	3000 K	370EB5 1 3	371EB5 1 3	372EB5 1 3	373EB5 1 3	374EB5 1 3
	4000 K	370EB5 1 5	371EB5 1 5	372EB5 1 5	373EB5 1 5	374EB5 1 5

						
	250 mA	3 W 355 – 395 – 411 lm	3 W 355 – 395 – 411 lm	3 W 355 – 395 – 411 lm	3 W 355 – 395 – 411 lm	3 W 355 – 395 – 411 lm
POWER STANDARD	2700 K	375EB5 1 2	376EB5 1 2	378EB5 1 2	379EB5 1 2	380EB5 1 2
	3000 K	375EB5 1 3	376EB5 1 3	378EB5 1 3	379EB5 1 3	380EB5 1 3
	4000 K	375EB5 1 5	376EB5 1 5	378EB5 1 5	379EB5 1 5	380EB5 1 5

						
	600 mA	7 W 669 – 722 – 774 lm	7 W 669 – 722 – 774 lm	7 W 669 – 722 – 774 lm	7 W 669 – 722 – 774 lm	7 W 669 – 722 – 774 lm
POWER HIGH	2700 K	370EB5 3 2	371EB5 1 2	372EB5 3 2	373EB5 3 2	374EB5 3 2
	3000 K	370EB5 3 3	371EB5 1 3	372EB5 3 3	373EB5 3 3	374EB5 3 3
	4000 K	370EB5 3 5	371EB5 1 5	372EB5 3 5	373EB5 3 5	374EB5 3 5

						
	600 mA	7 W 669 – 722 – 774 lm	7 W 669 – 722 – 774 lm	7 W 669 – 722 – 774 lm	7 W 669 – 722 – 774 lm	7 W 669 – 722 – 774 lm
POWER HIGH	2700 K	375EB5 3 2	376EB5 3 2	378EB5 3 2	379EB5 3 2	380EB5 3 2
	3000 K	375EB5 3 3	376EB5 3 3	378EB5 3 3	379EB5 3 3	380EB5 3 3
	4000 K	375EB5 3 5	376EB5 3 5	378EB5 3 5	379EB5 3 5	380EB5 3 5

	DRV.L VIO DRIVERS		DRV.L VIO DRIVERS	
POWER STANDARD	2 – 3 VIO	DRV.L.01.ST	1 – 3 VIO	DRV.L.01.HI
	4 – 9 VIO	DRV.L.02.ST	4 – 8 VIO	DRV.L.02.HI
	10 – 15 VIO	DRV.L.03.ST	–	–

The dimmable driver dimensions are larger than the cut-out hole. Dimming options require the combination of a minimum of two luminaires. The "DRV.L.ST" dimming options require the combination of a minimum of two luminaires. The data shown corresponds to raw values.

FINISH

B · Black

W · White

OPTIC OPTIONS FOR STANDARD

1 · 9°

2 · 12°

4 · 30°

OPTIC OPTIONS FOR HIGH

4 · 16°

3 · 24°

5 · 38°

DIMM OPTIONS

D · Dali

P · Push

V · 1.10v

ON DEMAND OPTIONS

Special finishes

Wireless control options

Down light



SASSY FAMILY

ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H

DIM
OPTIONAL

INDOOR


220-240 V
50-60 Hz

CE


IP65

SASSY ROUND – SMALL DIMENSION

SASSY ROUND RING PARTS


WHITE FINISH RING	BLACK FINISH RING	CHROME FINISH RING	SKETCH
			
360			

RECESSED WITH FRAME

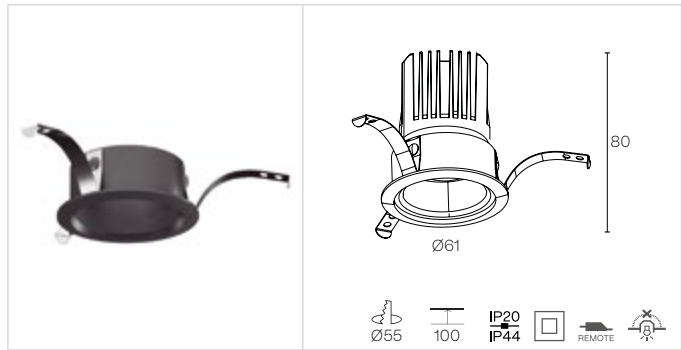


SASSY 8°: IP20/20

TRIMLESS

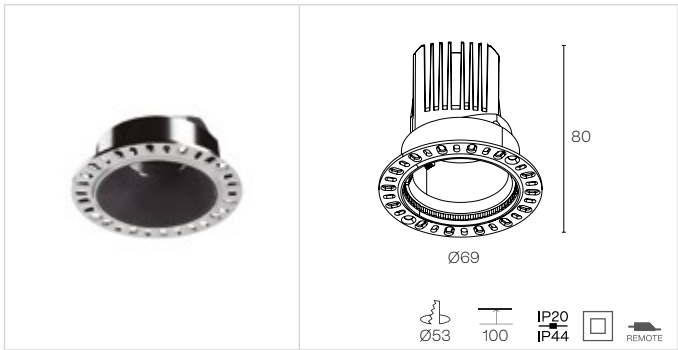

ACCESSORIES

OVAL FLOOD LENS	REFERENCE	FLOOD LENS	REFERENCE	HONEYCOMB
	ACC410002.OV.00.03X60		ACC410002.00.ZSX1.3	 ACC410002.HC
	ACC410002.OV.00.10X60		ACC410002.00.ZSX1.5	
	ACC410002.OV.00.10X40		ACC410002.00.ZSX2	
	ACC410002.OV.00.15X60		ACC410002.00.ZSX3	

For best performance, optic lenses are only recommended with the smallest beam angle .15.

Select 3 components to form your final luminaire: Sassy + Sassy LED + Ring part.


-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material
-  ON DEMAND OPTIONS
-  Wireless control options

TECHNICAL DATA

POWER STANDARD

		1300 mA 3 W	.00 SASSY ROUND + ROUND RING	
8°	2700 K	300 lm	360EA 112	
	3000 K	315 lm	360EA 113	
	4000 K	372 lm	360EA 115	

		200 mA 7 W	.00 SASSY ROUND + ROUND RING	
20° - 36°	2700 K	1000 lm	360EA 1 2	
	3000 K	1013 lm	360EA 1 3	
	4000 K	1059 lm	360EA 1 5	

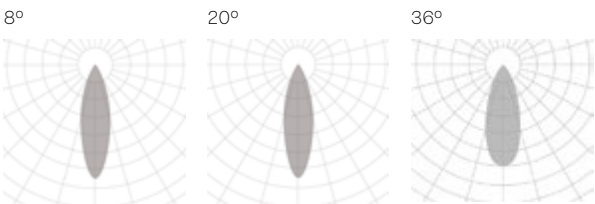

The data shown corresponds to raw values.

SASSY ROUND + MODEL 1



-  **BLACK BASE COLOR + FINISH RING**
B · Black + black
G · Black + white
J · Black + chrome
-  **WHITE BASE COLOR + FINISH RING**
H · White + black
W · White + white
I · White + chrome
-  **INSTALLATION**
5 · Recessed with frame
6 · Trimless
-  **DIMM OPTIONS**
O · On-Off
D · Dali
P · Push
V · 1.10v
F · Phase out
-  **BEAM ANGLE**
2 · 8°
4 · 20°
5 · 36°

SASSY ROUND – BIG DIMENSION


SASSY ROUND RING PARTS

WHITE FINISH RING	BLACK FINISH RING	CHROME FINISH RING	MAT SILVER FINISH RING	GRAFITE FINISH RING	SKETCH
					
360					

OTHER SASSY RING PARTS – Available only in white-white or black-white finish


SASSY SNOOT RING	SKETCH	SASSY OVAL HOLE RING	SKETCH	SASSY ROUND HOLE RING	SKETCH
					
362		363		364	

RECESSED WITH FRAME

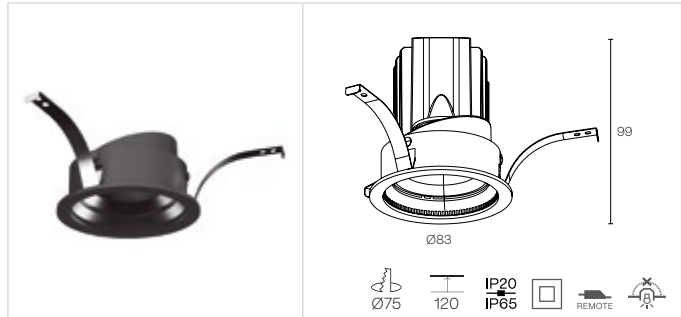

SASSY 8°: IP20/44

TRIMLESS

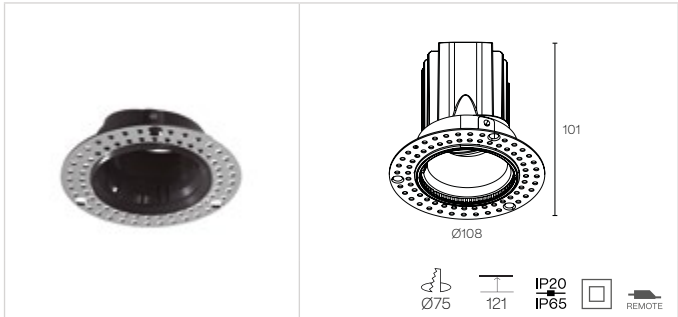

ACCESORIES

OVAL FLOOD LENS	REFERENCE	FLOOD LENS	REFERENCE	HONEYCOMB
	ACC410002.OV.03X60		ACC410002.ZSX1.3	
	ACC410002.OV.10X60		ACC410002.ZSX1.5	
	ACC410002.OV.10X40		ACC410002.ZSX2	
	ACC410002.OV.15X60		ACC410002.ZSX3	
				ACC410002.HC

Only compatible with ring part ACC410002.RR.
For best performance, optic lenses are only recommended with the smallest beam angle .15.


-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material
-  ON DEMAND OPTIONS
-  Wireless control options

TECHNICAL DATA

POWER STANDARD

			.01 SASSY ROUND + ROUND RING	.01 SASSY ROUND + SASSY SNOOT RING	.01 SASSY ROUND + SASSY OVAL HOLE RING	.01 SASSY ROUND + SASSY ROUND HOLE RING
POWER STANDARD	2700 K	250 mA 8 W 1325 lm	360EB 1 2	362EB 1 2	363EB 1 2	364EB 1 2
	3000 K	250 mA 8 W 1342 lm	360EB 1 3	362EB 1 3	363EB 1 3	364EB 1 3
	4000 K	250 mA 8 W 1405 lm	360EB 1 5	362EB 1 5	363EB 1 5	364EB 1 5
	D.WHITE	250 mA 10 W 880 – 3 lm	360EB 1 7	362EB 1 7	363EB 1 7	364EB 1 7
POWER MEDIUM	2700 K	350 mA 12 W 1749 lm	360EB 2 2	362EB 2 2	363EB 2 2	364EB 2 2
	3000 K	350 mA 12 W 1773 lm	360EB 2 3	362EB 2 3	363EB 2 3	364EB 2 3
	4000 K	350 mA 12 W 1856 lm	360EB 2 5	362EB 2 5	363EB 2 5	364EB 2 5
	D.WHITE	-	360EB 2 7	362EB 2 7	363EB 2 7	364EB 2 7
POWER HIGH	2700 K	500 mA 18 W 2423 lm	360EB 3 2	362EB 3 2	363EB 3 2	364EB 3 2
	3000 K	500 mA 18 W 2463 lm	360EB 3 3	362EB 3 3	363EB 3 3	364EB 3 3
	4000 K	500 mA 18 W 2579 lm	360EB 3 5	362EB 3 5	363EB 3 5	364EB 3 5
	D.WHITE	-	360EB 3 7	362EB 3 7	363EB 3 7	364EB 3 7

		700 mA 8 W	.01 SASSY ROUND + ROUND RING	.01 SASSY ROUND + SASSY SNOOT RING	.01 SASSY ROUND + SASSY OVAL HOLE RING	.01 SASSY ROUND + SASSY ROUND HOLE RING
8°	2700 K	606 lm	360EB 112	362EB 112	363EB 112	364EB 112
	3000 K	652 lm	360EB 113	362EB 113	363EB 113	364EB 113
	4000 K	661 lm	360EB 115	362EB 115	363EB 115	364EB 115

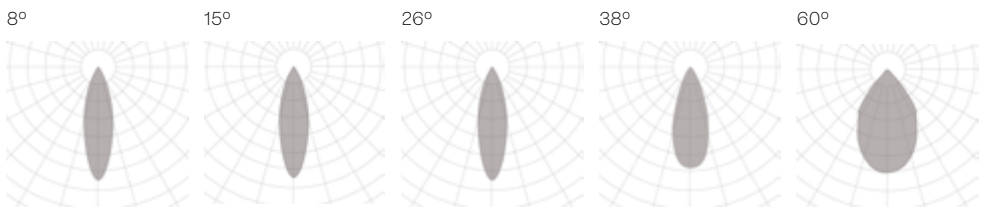

The data shown corresponds to raw values.
If the symbols use identical lettering, the desired color must be specified at a later stage.

SASSY ROUND – ROUND RING


-  **BLACK BASE COLOR + FINISH RING**
B · Black + black
G · Black + white
J · Black + chrome
J · Black + grafite
J · Black + mat Silver
-  **WHITE BASE COLOR + FINISH RING**
H · White + black
W · White + white
I · White + chrome
I · White + grafite
I · White + mat Silver
-  **INSTALLATION**
5 · Recessed with frame
6 · Trimless
-  **DIMM OPTIONS**
O · On-Off
D · Dali
P · Push
V · 1.10v
F · Phase cut
-  **BEAM ANGLE**
2 · 15°
4 · 26°
5 · 38°
7 · 60°

SASSY ROUND – OTHER RINGS


-  **BLACK BASE COLOR + FINISH RING**
B · Black + white
-  **WHITE BASE COLOR + FINISH RING**
W · White + white

SASSY SQUARE


SASSY SQUARE RING PARTS

WHITE FINISH RING	BLACK FINISH RING	CHROME FINISH RING	MAT SILVER FINISH RING	GRAFITE FINISH RING	SKETCH
					
361					


RECESSED WITH FRAME

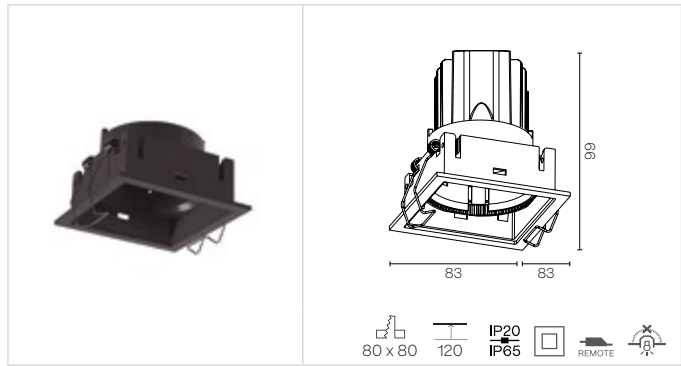

TRIMLESS

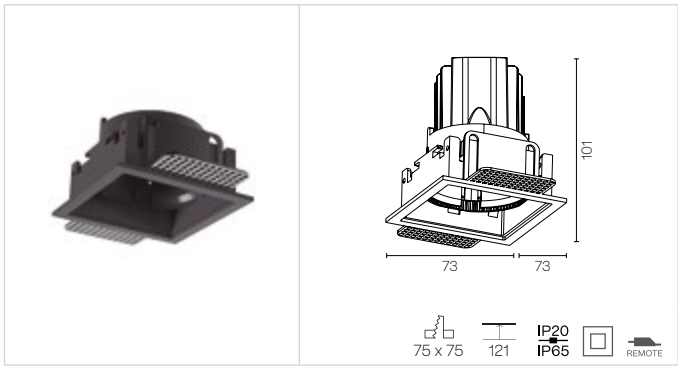

ACCESORIES

OVAL FLOOD LENS	REFERENCE	FLOOD LENS	REFERENCE	HONEYCOMB
	ACC410002.OV.03X60		ACC410002.ZSX1.3	 ACC410002.HC
	ACC410002.OV.10X60		ACC410002.ZSX1.5	
	ACC410002.OV.10X40		ACC410002.ZSX2	
	ACC410002.OV.15X60		ACC410002.ZSX3	

For best performance, optic lenses are only recommended with the smallest beam angle .15.

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**
-  Wireless control options

TECHNICAL DATA

POWER STANDARD

			.01 SASSY SQUARE + SQUARE RING	
POWER STANDARD	2700 K	250 mA 8 W 1325 lm	361EB 1 2	
	3000 K	250 mA 8 W 1342 lm	361EB 1 3	
	4000 K	250 mA 8 W 1405 lm	361EB 1 5	
	D.WHITE	250 mA 10 W 880 – 3 lm	361EB 1 7	
POWER MEDIUM	2700 K	350 mA 12 W 1749 lm	361EB 2 2	
	3000 K	350 mA 12 W 1773 lm	361EB 2 3	
	4000 K	350 mA 12 W 1856 lm	361EB 2 5	
	D.WHITE	-	361EB 2 7	
POWER HIGH	2700 K	500 mA 18 W 2423 lm	361EB 3 2	
	3000 K	500 mA 18 W 2463 lm	361EB 3 3	
	4000 K	500 mA 18 W 2579 lm	361EB 3 5	
	D.WHITE	-	361EB 3 7	

		700 mA 8 W	.01 SASSY SQUARE + SQUARE RING	
8°	2700 K	606 lm	361EB 112	
	3000 K	652 lm	361EB 113	
	4000 K	661 lm	361EB 115	



The data shown corresponds to raw values.
If the symbols use identical lettering, the desired color must be specified at a later stage.

SASSY SQUARE + MODEL 1

- BLACK BASE COLOR + FINISH RING**
B · Black + black
G · Black + white
J · Black + chrome
J · Black + grafite
J · Black + mat Silver
- WHITE BASE COLOR + FINISH RING**
H · White + black
W · White + white
I · White + chrome
I · White + grafite
I · White + mat Silver
- INSTALLATION**
5 · Recessed with frame
6 · Trimless
- DIMM OPTIONS**
O · On-Off
D · Dali
P · Push
V · 1.10v
F · Phase cut
- BEAM ANGLE**
1 · 8°
2 · 15°
4 · 26°
5 · 38°
7 · 60°



ROY

ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H

DIM
OPTIONAL


INDOOR

220-240 V
50-60 Hz

CE

ROY

Ø95

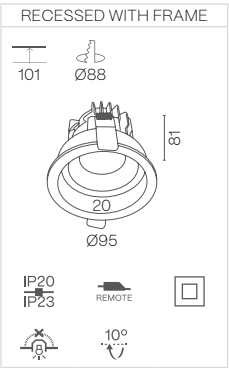

-  Cut hole

 Minimum height of the false ceiling

 Luminaire not suitable to be covered with thermal insulating material
-  ON DEMAND OPTIONS


 Special finishes

 Wireless control options

ROY

POWER STANDARD

		Ø95	
18°	300 mA	10 W 1496 – 1521 – 1592 lm	
	2700 K	359EB5 132	
	3000 K	359EB5 133	
	4000 K	359EB5 135	
25°	2700 K	359EB5 142	
	3000 K	359EB5 143	
	4000 K	359EB5 145	
38°	2700 K	359EB5 152	
	3000 K	359EB5 153	
	4000 K	359EB5 155	
60°	2700 K	359EB5 172	
	3000 K	359EB5 173	
	4000 K	359EB5 175	

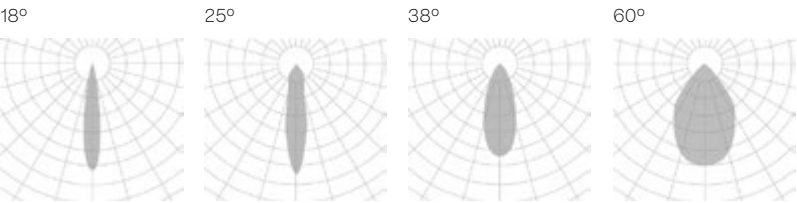

The data shown corresponds to raw values.

-  Down light

FINISH

B · Black

W · White


DIMM OPTIONS

O · On–Off

D · Dali

P · Push

CAN REVIEW FAMILY

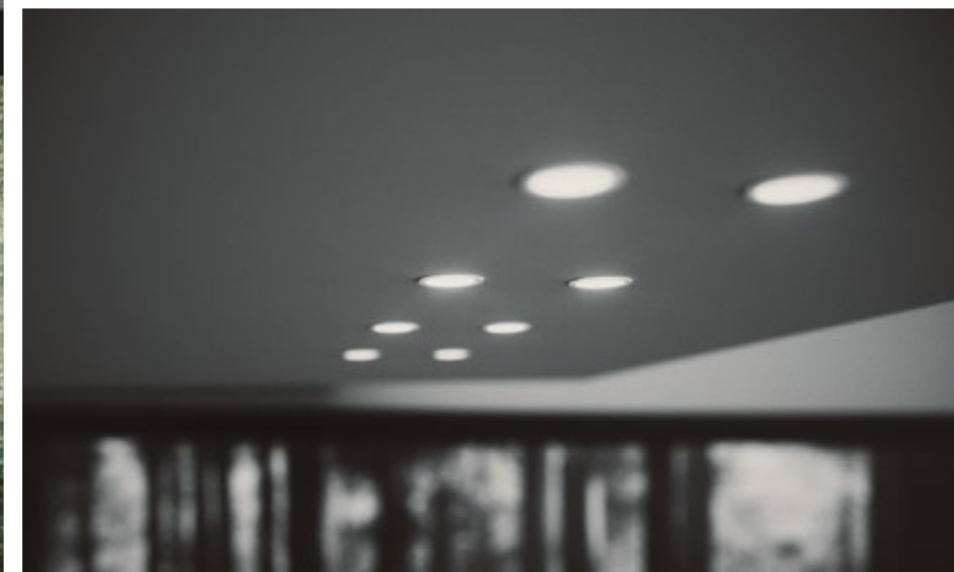

ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000h

DIM
OPTIONAL



REMOTE




220-240 V
50-60 Hz




CAN REVIEW


Ø110

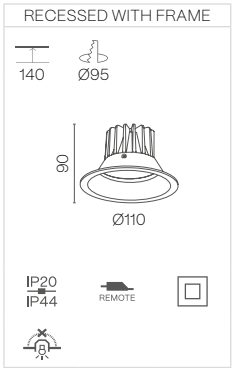

Ø190

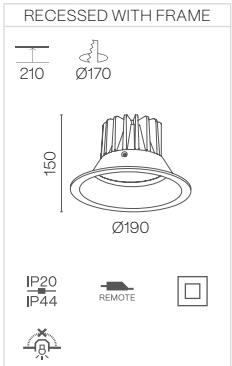

Ø280

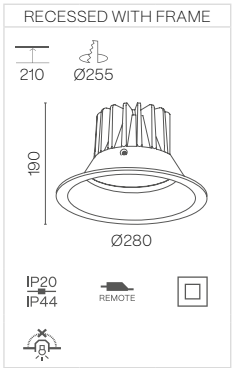


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Special finishes
- Wireless control options

CAN REVIEW

POWER STANDARD

		Ø110	Ø160	Ø190	Ø230	Ø280
		500 mA 8,5 W 1063 - 1094 - 1134 lm	500 mA 17,4 W 2081 - 2176 - 2305 lm	750 mA 26 W 3202 - 3325 - 3491 lm	1000 mA 35 W 4199 - 4390 - 4644 lm	1200 mA 46 W 4979 - 5170 - 5424 lm
40°	2700 K	308EB5 152	308EE5 152	308EH5 152	308EJ5 152	308EL5 152
	3000 K	308EB5 153	308EE5 153	308EH5 153	308EJ5 153	308EL5 153
	4000 K	308EB5 155	308EE5 155	308EH5 155	308EJ5 155	308EL5 155
60°	2700 K	308EB5 172	308EE5 172	308EH5 172	308EJ5 172	308EL5 172
	3000 K	308EB5 173	308EE5 173	308EH5 173	308EJ5 173	308EL5 173
	4000 K	308EB5 175	308EE5 175	308EH5 175	308EJ5 175	308EL5 175

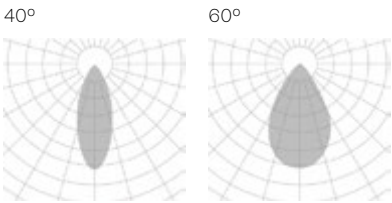

The data shown corresponds to raw values.


- FINISH**
- B** · Black
- W** · White
- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- Down light




CAN REVIEW IP65

CAN REVIEW IP65

Ø90



Ø109




- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Special finishes
- Wireless control options

POWER STANDARD

		Ø90	Ø109
90°		500 mA 10 W 723 – 756 – 828 lm	500 mA 15 W 1084 – 1135 – 1244 lm
	2700 K	365EB5 142	365EE5 142
	3000 K	365EB5 143	365EE5 143
	4000 K	365EB5 145	365EE5 145
40°	2700 K	365EB5 152	365EE5 152
	3000 K	365EB5 153	365EE5 153
	4000 K	365EB5 155	365EE5 155
60°	2700 K	365EB5 172	365EE5 172
	3000 K	365EB5 173	365EE5 173
	4000 K	365EB5 175	365EE5 175

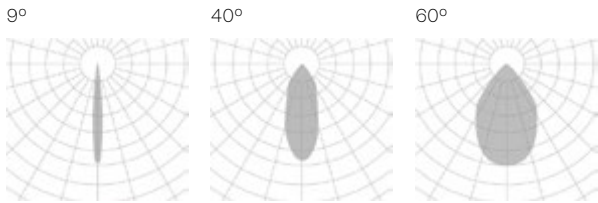

The data shown corresponds to raw values.


- FINISH**
B · Black
W · White
- DIMM OPTIONS**
O · On-Off
D · Dali
P · Push
- Down light

ALDAIA FAMILY




ALDAIA


Ø103

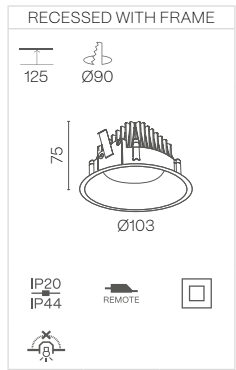

Ø145

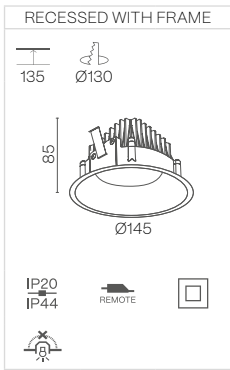


Ø200

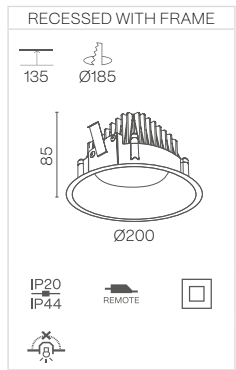

POWER STANDARD

		Ø103	Ø145	Ø200
Opal		300 mA 11 W 1440 – 1560 – 1680 lm	500 mA 15 W 2000 – 2167 – 2333 lm	800 mA 34 W 4480 – 4853 – 5227 lm
	2700 K	300EB5 112	300EE5 112	300EH5 112
	3000 K	300EB5 113	300EE5 113	300EH5 113
	4000 K	300EB5 115	300EE5 115	300EH5 115

Opal



The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- Down light


- ON DEMAND OPTIONS**
- Special finishes
- Wireless control options

- FINISH**
- B** · Black
- W** · White


- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

ALDAIA SQ

102x102

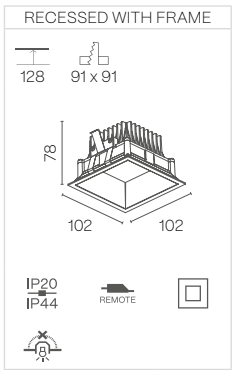


200x200

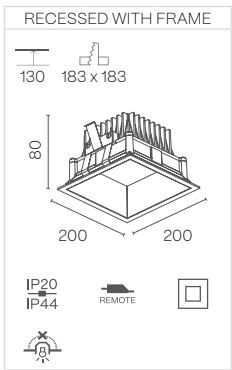

POWER STANDARD

		102 x 102	142 x 142	200 x 200
Opal		300 mA 11 W 1440 – 1560 – 1680 lm	500 mA 15 W 2000 – 2167 – 2333 lm	800 mA 34 W 4480 – 4853 – 5227 lm
	2700 K	301EB5 112	301EE5 112	301EH5 112
	3000 K	301EB5 113	301EE5 113	301EH5 113
	4000 K	301EB5 115	301EE5 115	301EH5 115

Opal



The data shown corresponds to raw values.


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- Down light

- ON DEMAND OPTIONS**
- Special finishes
- Wireless control options

- FINISH**
- B** · Black
- W** · White

- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

VADI

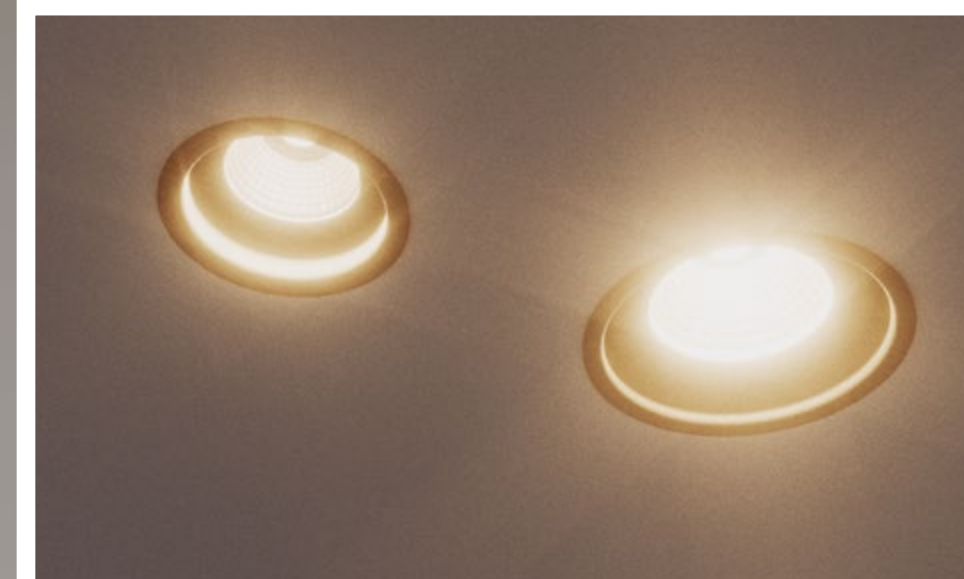

ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H

DIM
OPTIONAL

INDOOR

220-240 V
50-60 Hz

CE

VADI

Ø82



Ø124




- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS
- Wireless control options

VADI

POWER STANDARD

		Ø82	Ø124
		300 mA 10 W 1496 – 1521 – 1592 lm	500 mA 16 W 2798 – 2846 – 2970 lm
	40°	2700 K 366EB5W152	366EE5W152
		3000 K 366EB5W153	366EE5W153
		4000 K 366EB5W155	366EE5W155
60°	2700 K	366EB5W172	366EE5W172
	3000 K	366EB5W173	366EE5W173
	4000 K	366EB5W175	366EE5W175


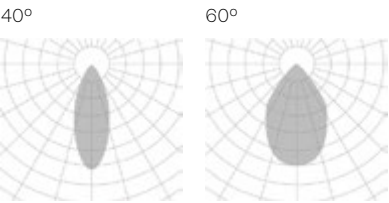


The data shown corresponds to raw values.
This product is only available in a white finish.


- DIMM OPTIONS
- On-Off
- Dali
- Push
- Down light




KONI FAMILY

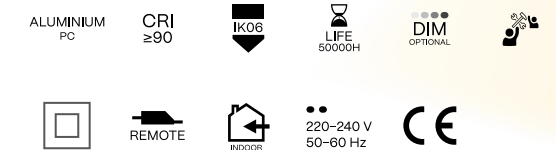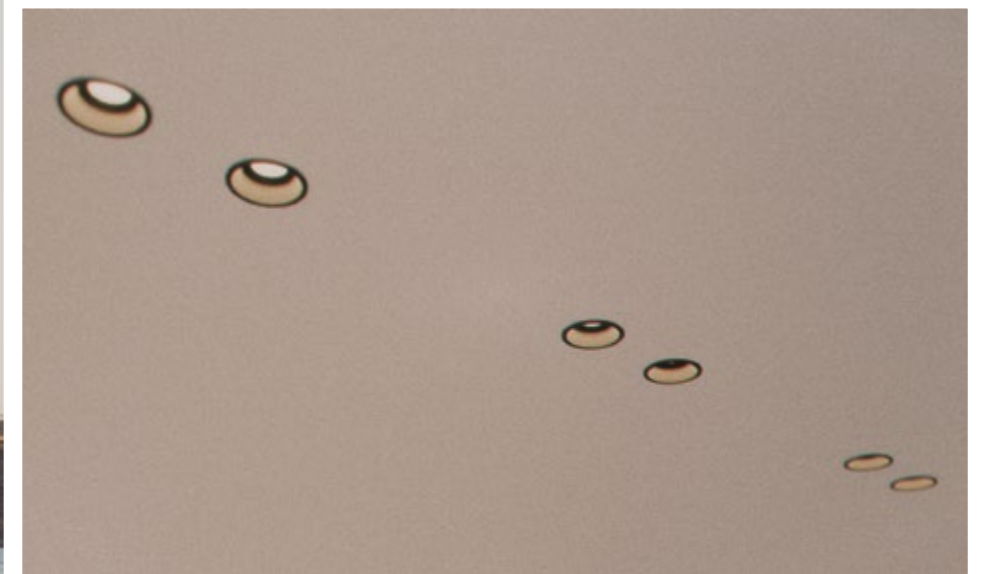


Ø80

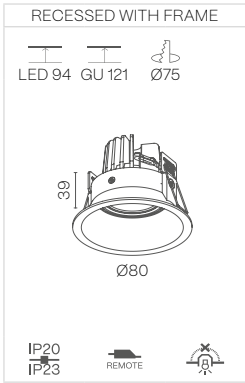

Ø98

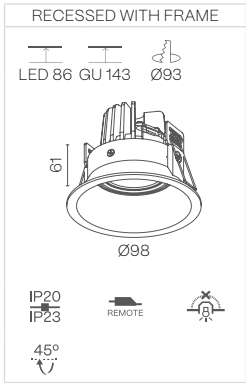

Ø180

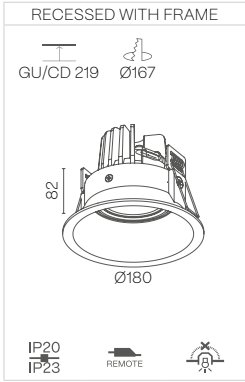

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ON DEMAND OPTIONS**
- Special finishes
 - Wall washer lens 15° beam angle
 - Wireless control options

POWER STANDARD

		Ø80	Ø98
		250 mA 8 W 1358 - 1380 - 1445 lm	250 mA 8 W 1358 - 1380 - 1445 lm
	40°	2700 K 388EB5 152	2700 K 388EE5 152
	3000 K	388EB5 153	388EE5 153
	4000 K	388EB5 155	388EE5 155
	60°	2700 K 388EB5 172	2700 K 388EE5 172
	3000 K	388EB5 173	388EE5 173
	4000 K	388EB5 175	388EE5 175

POWER GU5.3

		Ø80	Ø98
		Max. 8 W LED	Max. 8 W LED
-		388EB5 4XXX	388EE5 4XXX

POWER G53


		Ø180
		Max. 20 W LED
-		388EH5 4XXX

POWER GU10

		Ø80	Ø98	Ø180
		Max. 8 W LED	Max. 8 W LED	Max. 8 W LED
.GU		388EB5 5XXX	388EE5 5XXX	388EH5 5XXX

POWER CDMR

		Ø180
		Max. 20 W LED
.CD		388EH5 6XXX

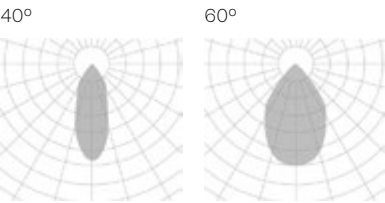


The data shown corresponds to raw values.

- Down light
- FINISH**
 - B** · Black
 - W** · White
 - A** · Striped aluminum
- DIMM OPTIONS**
 - D** · Dali
 - P** · Push
 - V** · 1.10v

KONI DEEP

Ø83

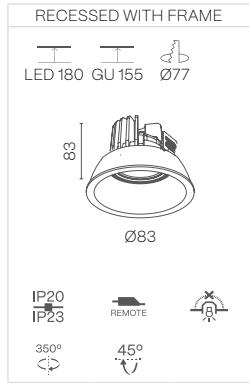


POWER STANDARD

		Ø83	
			
		250 mA 8 W 1358 – 1380 – 1445 lm	
	40°	2700 K	389EB5  152 
		3000 K	389EB5  153 
		4000 K	389EB5  155 
	60°	2700 K	389EB5  172 
		3000 K	389EB5  173 
		4000 K	389EB5  175 

POWER GU10

		Ø83	
			
		Max. 8 W LED	
			
.GU		389EB5  5XXX	

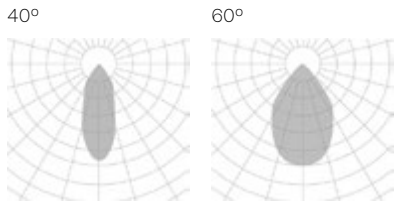


The data shown corresponds to raw values.

-  Cut hole
  Minimum height of the false ceiling
  Luminaire not suitable to be covered with thermal insulating material
  Down light
- ON DEMAND OPTIONS**
 Special finishes
  Wall washer lens 15° beam angle
  Wireless control options

- FINISH**
B · Black
 W · White
- DIMM OPTIONS**
D · Dali
 P · Push
 V · 1.10v


KONI TURTA

Ø81

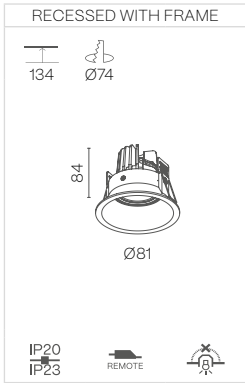

POWER STANDARD

		Ø83	Ø100
		250 mA 7 W 855 – 900 – 957 lm	250 mA 7 W 855 – 900 – 957 lm
	40°	2700 K	390EB5  152 
		3000 K	390EB5  153 
		4000 K	390EB5  155 
	60°	2700 K	390EB5  172 
		3000 K	390EB5  173 
		4000 K	390EB5  175 

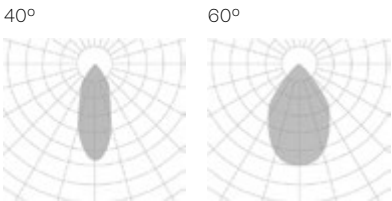

The data shown corresponds to raw values.

-  Cut hole
  Minimum height of the false ceiling
  Luminaire not suitable to be covered with thermal insulating material
  Down light
- ON DEMAND OPTIONS**
 Special finishes
  Wireless control options

- FINISH**
B · Black
 W · White
- DIMM OPTIONS**
D · Dali
 P · Push
 V · 1.10v



CATLI FAMILY



ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000H

DIM
OPTIONAL

INDOOR


220-240 V
50-60 Hz

CE


RoHS

CATLI

Ø80 / Ø93

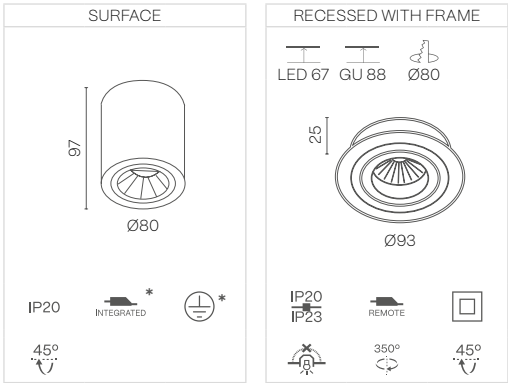

Ø170

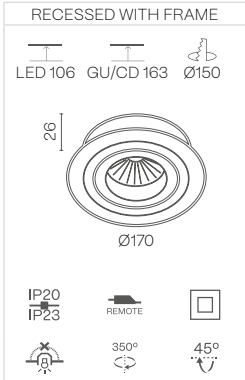

* ELECTRIC CLASS II and DRIVER REMOTE when dimmable.

-  Cut hole

 Minimum height of the false ceiling

 Luminaire not suitable to be covered with thermal insulating material

ON DEMAND OPTIONS

 Wireless control options

 Wall washer lens 15° beam angle

362

CATLI FAMILY

CATLI

POWER STANDARD

		Ø80 / Ø93	Ø170
		 BPM50	 BPM3181
		250 mA 8 W 1358 – 1380 – 1445 lm	350 mA 18 W 2720 – 2767 – 2887 lm
	2700 K	381EB   152 	381EE5  152 
	3000 K	381EB   153 	381EE5  153 
	4000 K	381EB   155 	381EE5  155 
	2700 K	381EB   172 	381EE5  172 
	3000 K	381EB   173 	381EE5  173 
	4000 K	381EB   175 	381EE5  175 

POWER HIGH

		Ø80 / Ø93
		 BPM300
		350 mA 12 W 1784 – 1820 – 1866 lm
	2700 K	381EB   352 
	3000 K	381EB   353 
	4000 K	381EB   355 
	2700 K	381EB   372 
	3000 K	381EB   373 
	4000 K	381EB   375 

POWER GU10

		Ø80 / Ø93	Ø170
		 GU10	 GU10
		Max. 8 W LED	Max. 20 W LED
	.GU	381EB   5XXX	381EE5  5XXX

POWER GU5.3

		Ø80 / Ø93
		 GU5.3
		Max. 8 W LED
	-	381EB   4XXX


POWER G53

		Ø170
		 G53
		Max. 20 W LED
	-	381EE5  4XXX


POWER CDMR

		Ø170
		 GX8.5
		Max. 20 W LED
	.CD	381EE5  6XXX

40°



60°



The data shown corresponds to raw values.

INSTALLATION

3 · Surface

5 · Recessed with frame

FINISH

B · Black

W · White

A · Striped aluminum

DIMM OPTIONS

D · Dali

P · Push

V · 1.10v

 Down light


CATLI

363

CATLI SQ

80 × 80 / 94 × 94

SURFACE



80 x 80

IP20

INTEGRATED

45°

RECESSED WITH FRAME

LED 67

GU 88

Ø80



94 x 94

IP20

IP23

REMOTE

45°

350°

45°


170 x 170

RECESSED WITH FRAME

LED 106

GU/CD 163

Ø150



170 x 170

IP20

IP23

REMOTE

45°

350°

45°

* ELECTRIC CLASS II and DRIVER REMOTE when dimmable.

-  Cut hole

 Minimum height of the false ceiling

 Luminaire not suitable to be covered with thermal insulating material
-  ON DEMAND OPTIONS

 Wireless control options

 Wall washer lens 15° beam angle

CATLI SQ

POWER STANDARD

		80 × 80 / 94 × 94	170 × 170
		 BPM50	 BPM3181
	40°	250 mA 8 W 1358 – 1380 – 1445 lm	350 mA 18 W 2720 – 2767 – 2887 lm
		2700 K 385EB  152 	385EE5  152 
		3000 K 385EB  153 	385EE5  153 
	40°	4000 K 385EB  155 	385EE5  155 
		2700 K 385EB  172 	385EE5  172 
		3000 K 385EB  173 	385EE5  173 
	60°	4000 K 385EB  175 	385EE5  175 

POWER HIGH

		94 × 94
		 BPM300
	40°	350 mA 12 W 1784 – 1820 – 1866 lm
		2700 K 385EB5  352 
		3000 K 385EB5  353 
	40°	4000 K 385EB5  355 
		2700 K 385EB5  372 
	60°	3000 K 385EB5  373 
		4000 K 385EB5  375 

POWER GU10

		80 × 80 / 94 × 94	170 × 170
		 GU10	 GU10
		Max. 8 W LED	Max. 20 W LED
		.GU 385EB  5XXX	385EE5  5XXX

POWER GU5.3


		80 × 80 / 94 × 94
		 GU5.3
		Max. 8 W LED
		- 385EB  4XXX

POWER G53

		170 × 170
		 G53
		Max. 20 W LED
		- 385EE5  4XXX

POWER CDMR

		170 × 170
		 GX8.5
		Max. 20 W LED
		.CD 385EE5  6XXX

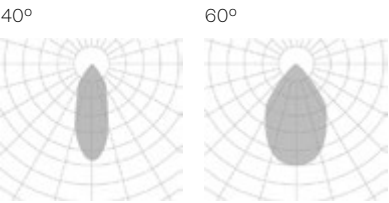

The data shown corresponds to raw values.

-  INSTALLATION

3 · Surface

5 · Recessed with frame
-  FINISH

B · Black

W · White

A · Striped aluminum
-  DIMM OPTIONS


D · Dali

P · Push


V · 1.10v
-  Down light

CATLI SQ DOUBLE

186 x 94

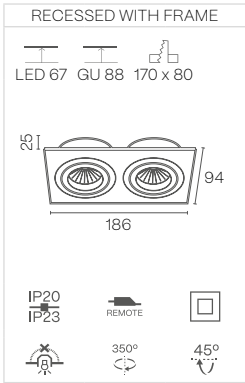

340 x 170

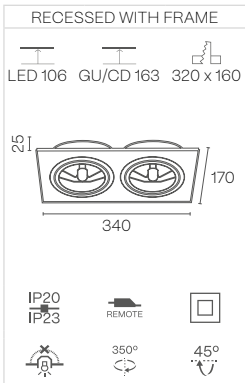

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS
- Wireless control options
- Wall washer lens 15° beam angle

CATLI SQ DOUBLE

POWER STANDARD


		186 x 94	340 x 170
		BPM50	BPM3181
		250 mA 8 W 1358 – 1380 – 1445 lm	350 mA 18 W 2720 – 2767 – 2887 lm
	2700 K	386EB5 152	386EE5 152
	3000 K	386EB5 153	386EE5 153
		4000 K	386EB5 155
	2700 K	386EB5 172	386EE5 172
	3000 K	386EB5 173	386EE5 173
		4000 K	386EB5 175
	4000 K	386EB5 175	386EE5 175

POWER GU10

		186 x 94	340 x 170
		GU10	GU10
		Max. 2 × 8 W LED	Max. 2 × 20 W LED
.GU		386EB5 5XXX	386EE5 5XXX

POWER G53

		340 x 170
		G53
		Max. 2 × 20 W LED
-		386EE5 4XXX

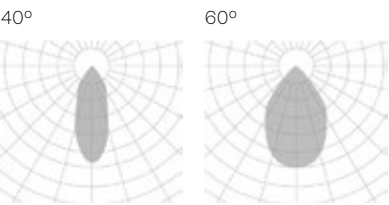

The data shown corresponds to raw values.

- Down light
- FINISH
 - B** · Black
 - W** · White
 - A** · Striped aluminum
- DIMM OPTIONS
 - D** · Dali
 - P** · Push
 - V** · 1.10v

POWER HIGH

		186 x 94
		BPM300
		350 mA 12 W 1784 – 1820 – 1866 lm
		2700 K
	2700 K	386EB5 352
	3000 K	386EB5 353
		4000 K
	2700 K	386EB5 372
	3000 K	386EB5 373
		4000 K
	4000 K	386EB5 375

POWER GU5.3


		186 x 94
		GU5.3
		Max. 2 × 8 W LED
-		386EB5 4XXX

POWER CDMR

		340 x 170
		GX8 5
		Max. 2 × 20 W LED
.CD		386EE5 6XXX

CATLI CLASSIC

Ø85

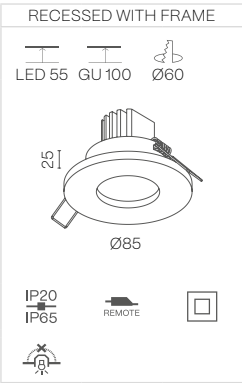

POWER STANDARD

		Ø85
		250 mA 8 W 1358 – 1380 – 1445 lm
40°	2700 K	382EB5 152
	3000 K	382EB5 153
	4000 K	382EB5 155
60°	2700 K	382EB5 172
	3000 K	382EB5 173
	4000 K	382EB5 175

POWER HIGH


		Ø85
		350 mA 12 W 1784 – 1820 – 1866 lm
40°	2700 K	382EB5 352
	3000 K	382EB5 353
	4000 K	382EB5 355
60°	2700 K	382EB5 372
	3000 K	382EB5 373
	4000 K	382EB5 375

POWER GU10

		Ø85
		Max. 2 x 8 W LED
.GU		382EB5 5XXX

POWER GU5.3

		Ø85
		Max. 2 x 8 W LED
-		382EB5 4XXX

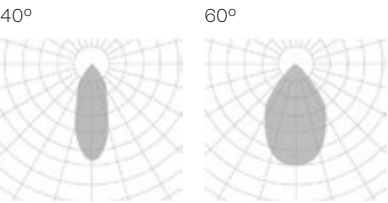

The data shown corresponds to raw values.


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- Down light

- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens 15° beam angle

- FINISH**
- B** · Black
- W** · White
- A** · Striped aluminum
- DIMM OPTIONS**
- D** · Dali
- P** · Push
- V** · 1.10v

CATLI CLASSIC SQ

85 x 85

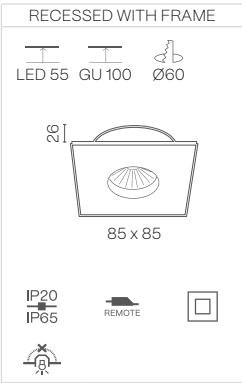

POWER STANDARD

		85 x 85
		250 mA 8 W 1358 – 1380 – 1445 lm
40°	2700 K	383EB5 152
	3000 K	383EB5 153
	4000 K	383EB5 155
60°	2700 K	383EB5 172
	3000 K	383EB5 173
	4000 K	383EB5 175

POWER HIGH


		85 x 85
		350 mA 12 W 1784 – 1820 – 1866 lm
40°	2700 K	383EB5 352
	3000 K	383EB5 353
	4000 K	383EB5 355
60°	2700 K	383EB5 372
	3000 K	383EB5 373
	4000 K	383EB5 375

POWER GU10

		85 x 85
		Max. 2 x 8 W LED
.GU		383EB5 5XXX

POWER GU5.3

		85 x 85
		Max. 2 x 8 W LED
-		386EB5 4XXX

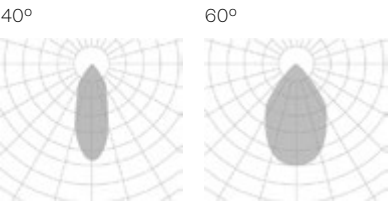

The data shown corresponds to raw values.


- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- Down light

- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens 15° beam angle

- FINISH**
- B** · Black
- W** · White
- A** · Striped aluminum
- DIMM OPTIONS**
- D** · Dali
- P** · Push
- V** · 1.10v

CATLI HALKA

Ø83

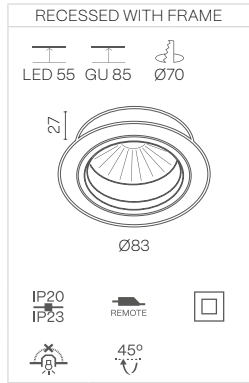

POWER STANDARD

		Ø83
		BPM50
40°	2700 K	384EB5 152
	3000 K	384EB5 153
	4000 K	384EB5 155
	2700 K	384EB5 172
60°	3000 K	384EB5 173
	4000 K	384EB5 175

POWER HIGH


		Ø83
		BPM300
40°	2700 K	384EB5 352
	3000 K	384EB5 353
	4000 K	384EB5 355
	2700 K	384EB5 372
60°	3000 K	384EB5 373
	4000 K	384EB5 375

POWER GU10

		Ø83
		GU10
		Max. 8 W LED
.GU		384EB5 5XXX

POWER GU5.3

		Ø83
		GU5.3
		Max. 8 W LED
-		384EB5 4XXX

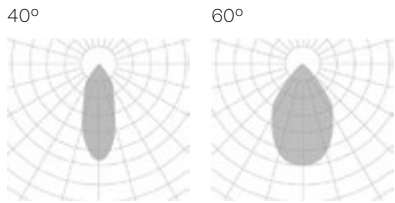

The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- Down light

- ON DEMAND OPTIONS
- Wireless control options
 - Wall washer lens 15° beam angle

- FINISH
- B · Black
 - W · White
 - A · Striped aluminum
- DIMM OPTIONS
- D · Dali
 - P · Push
 - V · 1.10v





Iluminación para crear atmósfera

Diseñada para aportar carácter y atmósfera a los espacios arquitectónicos, la iluminación decorativa introduce una dimensión más expresiva de la luz. Una amplia variedad de formas, materiales y configuraciones ofrece una multitud de posibilidades para generar presencia visual sin perder equilibrio ni coherencia con el entorno.

Más allá de su valor estético, la iluminación decorativa contribuye al confort visual y a la identidad del espacio, complementando los esquemas de iluminación arquitectónica en proyectos hospitality, residenciales y contract.

Lighting for atmosphere

Designed to add character and atmosphere to architectural spaces, decorative lighting introduces a more expressive dimension to light. A wide range of forms, materials and configurations offers multiple possibilities to create visual presence while maintaining balance and coherence with the space.

Beyond its aesthetic role, decorative lighting contributes to visual comfort and spatial identity, complementing architectural lighting schemes in hospitality, residential and contract projects.

DECORATIVE

GALANTA FAMILY
PAG. 376

SUBLIM
PAG. 482

VENISE
PAG. 386

FACE FAMILY
PAG. 340

DECORATIVE





GALANTA FAMILY



ALUMINIUM
PC

CRI
≥90

IK06

LIFE
50000H

DIM
OPTIONAL

INDOOR

220-240 V
50-60 Hz

CE


IP54




GALANTA DEEP

GALANTA DEEP


Ø70

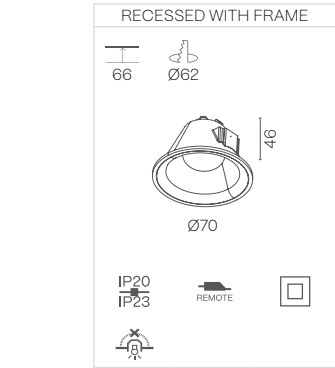

Ø83

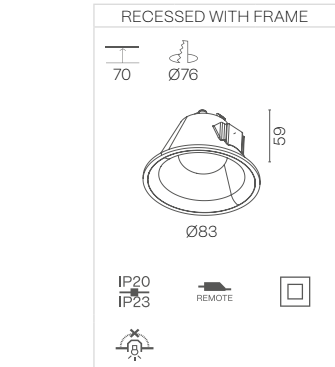


Ø94

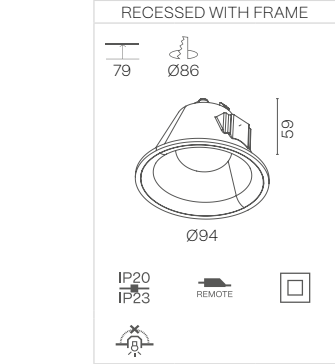

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS**
- Wireless control options

POWER STANDARD – Recessed with frame installation

		Ø70	Ø83	Ø94
Opal	500 mA	4 W 324 – 408 – 492 lm	7 W 432 – 545 – 656 lm	10 W 802 – 906 – 960 lm
	2700 K	506EB5 112	506EE5 112	506EH5 112
	3000 K	506EB5 113	506EE5 113	506EH5 113
	4000 K	506EB5 115	506EE5 115	506EH5 115




The data shown corresponds to raw values.

- FINISH**
- DIMM OPTIONS**
- Down light
- B** · Black
- W** · White
- S** · Special color
- O** · On–Off
- D** · Dali
- P** · Push

GALANTA BONETE

Ø80



* ELECTRIC CLASS II and DRIVER REMOTE when dimmable

 ON DEMAND OPTIONS

 Wireless control options

GALANTA BONETE

POWER STANDARD – Pendant installation

		Ø80	
	500 mA	5 W 698 – 790 – 850 lm	
	2700 K	505EB1  112 	
	3000 K	505EB1  113 	
	4000 K	505EB1  115 	

Opal



The data shown corresponds to raw values.

 FINISH

B · Black
W · White
S · Special color


 DIMM OPTIONS

O · On–Off
D · Dali
P · Push

 Down light




SUBLIM

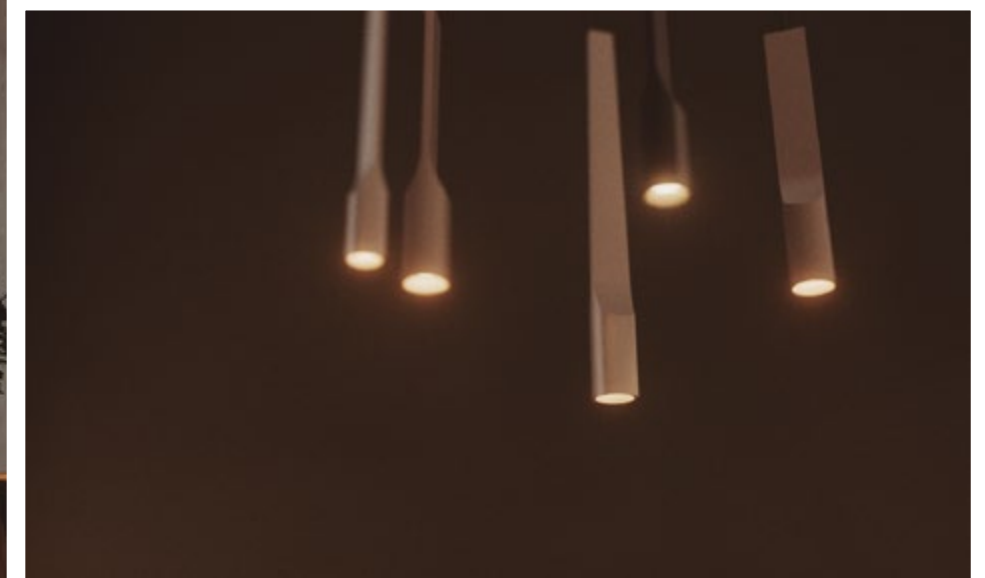


- ALUMINIUM PC
- CRI ≥90
- IK06
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE

SUBLIM


H270



H400



H1000



* ELECTRIC CLASS II and DRIVER REMOTE when dimmable


ON DEMAND OPTIONS

Wireless control options

SUBLIM

POWER STANDARD – Pendant installation

		H270	H400	H1000
36°	350 mA	9 W 1073 – 1122 – 1186 lm	9 W 1073 – 1122 – 1186 lm	9 W 1073 – 1122 – 1186 lm
	2700 K	507EB1 152	507EE1 152	507EH1 152
	3000 K	507EB1 153	507EE1 153	507EH1 153
	4000 K	507EB1 155	507EE1 155	507EH1 155



The data shown corresponds to raw values.

FINISH

B · Black

W · White

S · Special color

DIMM OPTIONS

O · On–Off

D · Dali

P · Push

Down light

VENISE



ALUMINIUM
PC

CRI
≥90

IK06

IP20

LIFE
50000H

DIM
OPTIONAL

INDOOR


220-240 V
50-60 Hz

CE


WIFI

VENISE

Ø200




Ø320



Ø450



Ø600



* ELECTRIC CLASS II and DRIVER REMOTE when dimmable

ON DEMAND OPTIONS


- Special finishes
- Wireless control options

VENISE

POWER STANDARD – Pendant installation

		Ø200	Ø320	Ø450	Ø600
		500 mA 9 W 1100 lm	500 mA 18 W 1302 lm	700 mA 28 W 2310 lm	1050 mA 43 W 3520 lm
Opal	3000 K	508EB1 113	508EE1 113	508EH1 113	508EJ1 113

Opal



The data shown corresponds to raw values.

FINISH

- B · Black
- W · White
- G · Black – white
- H · White – black


DIMM OPTIONS

- O · On–Off
- D · Dali
- P · Push

Down light




FACE FAMILY

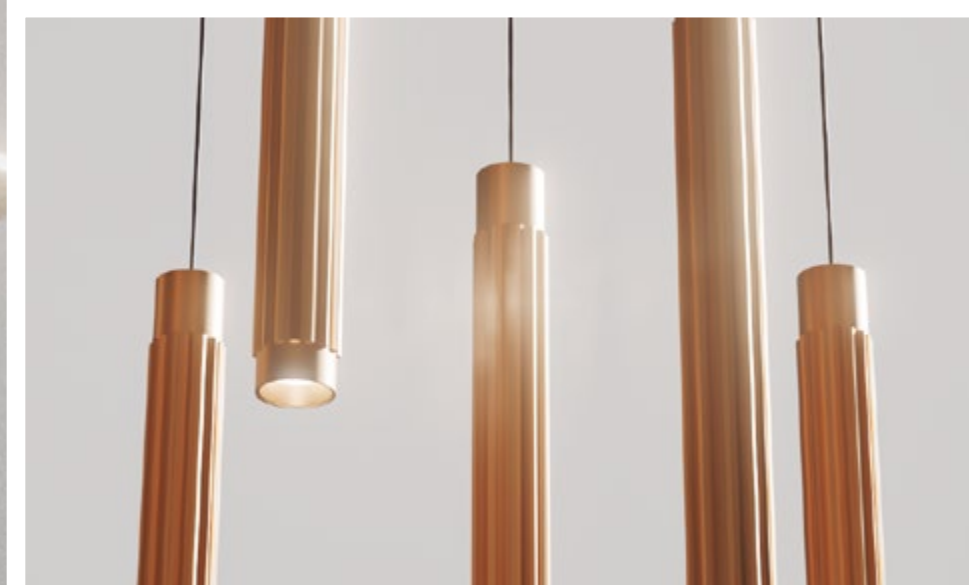


- ALUMINIUM
PC
- CRI
≥90
- IK06
- LIFE
50000H
- DIM
OPTIONAL
- INDOOR
- 220-240 V
50-60 Hz
- CE
-

FACE TUBULAR


Ø40 - H122

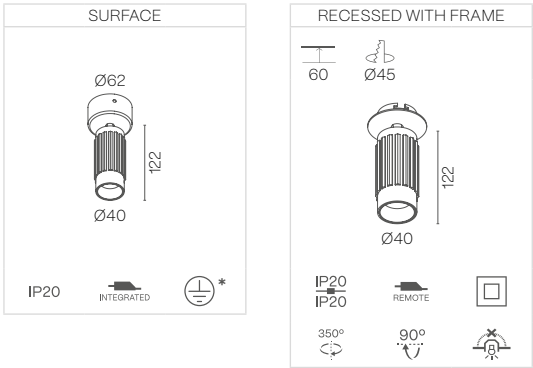

Ø40 - H300



Ø40 - H400



* ELECTRIC CLASS II and DRIVER REMOTE when dimmable

- Cut hole

Minimum height of the false ceiling


Luminaire not suitable to be covered with thermal insulating material
- ON DEMAND OPTIONS

Wireless control options

FACE TUBULAR

POWER STANDARD

		Ø40 - H122	Ø40 - H300	Ø40 - H400
40°	350 mA	10 W 792 - 848 - 876 lm	10 W 792 - 848 - 876 lm	10 W 792 - 848 - 876 lm
	2700 K	503EB 152	503EB1 152	503EE1 152
	3000 K	503EB 143	503EB1 153	503EE1 153
	4000 K	503EB 145	503EB1 155	503EE1 155



The data shown corresponds to raw values.

- INSTALLATION

3 · Surface

5 · Recessed with frame
- FINISH

B · Black

W · White

S · Special color
- DIMM OPTIONS

O · On-Off


D · Dali

P · Push


Down light

FACE TUBULAR SPAC

Ø60 – H300



Ø60 – H400



* ELECTRIC CLASS II and DRIVER REMOTE when dimmable


ON DEMAND OPTIONS

 Wireless control options

FACE TUBULAR SPAC

POWER STANDARD – Pendant installation

		Ø60 – H300	Ø60 – H400
40°	 700 mA	15 W 1324 – 1358 – 1385 lm	15 W 1324 – 1358 – 1385 lm
	2700 K	504EB1  152 	504EE1  152 
	3000 K	504EB1  153 	504EE1  153 
	4000 K	504EB1  155 	504EE1  155 



The data shown corresponds to raw values.

FINISH

- B · Black
- W · White
- S · Special color


DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push


 Down light

FACE IRIS


Ø105



Ø170



Ø270



* ELECTRIC CLASS II and DRIVER REMOTE when dimmable


ON DEMAND OPTIONS

Wireless control options

FACE IRIS

POWER STANDARD – Pendant installation

		Ø105	Ø170	Ø270
60°		500 mA 10 W 1021 – 1065 – 1202 lm	500 mA 19 W 1880 – 2264 – 2322 lm	700 mA 28 W 2296 – 2830 – 2966 lm
	2700 K	500EB1 172	500EE1 172	500EH1 172
	3000 K	500EB1 173	500EE1 173	500EH1 173
	4000 K	500EB1 175	500EE1 175	500EH1 175



The data shown corresponds to raw values.

FINISH

B · Black
W · White
S · Special color


DIMM OPTIONS

O · On–Off
D · Dali
P · Push


Down light

FACE KIERA


Ø56



Ø75



Ø100



* ELECTRIC CLASS II and DRIVER REMOTE when dimmable


ON DEMAND OPTIONS

Wireless control options

FACE KIERA

POWER STANDARD – Pendant installation

		Ø56	Ø75	Ø100
		500 mA 5 W 514 – 559 – 610 lm	700 mA 7 W 715 – 730 – 743 lm	500 mA 17 W 1396 – 1655 – 1962 lm
	2700 K	501EB1 152	501EE1 152	501EH1 152
	3000 K	501EB1 153	501EE1 153	501EH1 153
	4000 K	501EB1 155	501EE1 155	501EH1 155



The data shown corresponds to raw values.

FINISH

B · Black

W · White

S · Special color

DIMM OPTIONS

O · On–Off


D · Dali

P · Push


Down light

FACE KIERA CEMENT


Ø56



Ø75



Ø100



* ELECTRIC CLASS II and DRIVER REMOTE when dimmable


ON DEMAND OPTIONS

Wireless control options

FACE KIERA CEMENT

POWER STANDARD – Pendant installation

		Ø56	Ø75	Ø100
38°		500 mA 5 W 514 – 559 – 610 lm	700 mA 7 W 715 – 730 – 743 lm	500 mA 17 W 1396 – 1655 – 1962 lm
	2700 K	502EB1 152	502EE1 152	502EH1 152
	3000 K	502EB1 153	502EE1 153	502EH1 153
	4000 K	502EB1 155	502EE1 155	502EH1 155



The data shown corresponds to raw values.

FINISH

B · Black
W · White
S · Special color

DIMM OPTIONS

O · On–Off
D · Dali
P · Push

Down light



La presencia invisible

Diseñada para integrarse de forma natural en los planos verticales, la iluminación de pared ofrece una luz sutil y controlada que realza el espacio sin reclamar protagonismo. La luz actúa como un elemento arquitectónico silencioso, definiendo profundidad, ritmo y atmósfera.

A través de emisiones indirectas y una distribución cuidada de la luz, la iluminación de pared contribuye al confort visual y al equilibrio espacial, permitiendo que la arquitectura siga siendo la verdadera protagonista.

The invisible presence

Designed to integrate seamlessly into vertical surfaces, wall lighting provides subtle and controlled illumination that enhances space without drawing attention to itself. Light becomes a quiet architectural element, defining depth, rhythm and atmosphere.

By working with indirect emission and careful light distribution, wall lighting contributes to visual comfort and spatial balance, allowing the architecture to remain the true protagonist.

STHIGHTS
WALL
AM

FLAT FAMILY

PAG. 406

HURY

PAG. 408

IKI

PAG. 410

KAPI

PAG. 412

KUU

PAG. 414

MAGRIT

PAG. 418

ADIMA FAMILY

PAG. 418

KLEE FAMILY

PAG. 419

WALL LIGHTS



FLAT


NEW

- ALUMINIUM
PC
- CRI
≥90
- IK08
- LIFE
50000h
- DIM
OPTIONAL
-
-
- INTEGRATED
-
- 220-240 V
50-60 Hz
- CE




FLAT / FLAT SLIM

L200 – SINGLE




L320 – DOUBLE



POWER STANDARD

		L200	L300
		16 W 1270 – 1380 – 1434 lm	30 W 2379 – 2586 – 2691 lm
	2700 K	520EB7 112	520EE7 112
	3000 K	520EB7 113	520EE7 113
	4000 K	520EB7 115	520EE7 115

L250



POWER STANDARD

		L250	
		20 W 1790 – 1950 – 2020 lm	
	2700 K	521EB7 112	
	3000 K	521EB7 113	
	4000 K	521EB7 115	

The data shown corresponds to raw values.

LENGTHS mm

200 · 250 · 300

Up light

Phase cut on demand

FINISH

B · Black
W · White
S · Special color

DIMM OPTIONS

O · On-Off
D · Dali
P · Push
V · 1.10v


HURY

- ALUMINIUM
PC
- CRI
≥90
- IK06
- LIFE
50000H
- DIM
OPTIONAL
- IP20
-
- REMOTE
- INDOOR
- 220-240 V
50-60 Hz
- CE



HURY


L320



L520



L720



POWER STANDARD

		L320	L520	L720
	24 VdC	12 W 1451 lm	19 W 2358 lm	26 W 3265 lm
Opal	3000 K	522EB7 113	522EE7 113	522EH7 113

The data shown corresponds to raw values.

LENGTHS mm

320 · 520 · 720

Up light

FINISH


B · Black
W · White

DIMM OPTIONS

O · On-Off
D · Dali
P · Push
V · 1.10v



L100



POWER STANDARD

		L100	
	300 mA	5 W 533 lm	
Opal	3000 K	523EB7W113O	

The data shown corresponds to raw values.

LENGTHS mm
100

Up/down light


KAPI

- ALUMINIUM
PC
- CRI
≥90
- IK06
- LIFE
50000H
- DIM
OPTIONAL
-
- INTEGRATED
- INDOOR
- 220-240 V
50-60 Hz
- CE




KAPI


L150



L300



L500



POWER STANDARD

		L150	L300	L500
	350 mA	2 W 250 lm	4 W 500 lm	10 W 1000 lm
Opal	3000 K	524EB7W113O	524EE7W113O	524EH7W113O

The data shown corresponds to raw values.

LENGTHS mm

150 · 300 · 500

Up/down light

KUU

- ALUMINIUM
PC

CRI
≥90

IK06

LIFE
50000H

DIM
OPTIONAL
- INTEGRATED

INDOOR


220-240 V
50-60 Hz

CE



KUU

L220




POWER STANDARD

		L220 - WHITE FINISH	L220 - BLACK FINISH
	100 mA	10 W 965 lm	10 W 965 lm
Opal	3000 K	525EB7W113O	524EE7B113O

The data shown corresponds to raw values.

LENGTHS mm
220

Up/down light

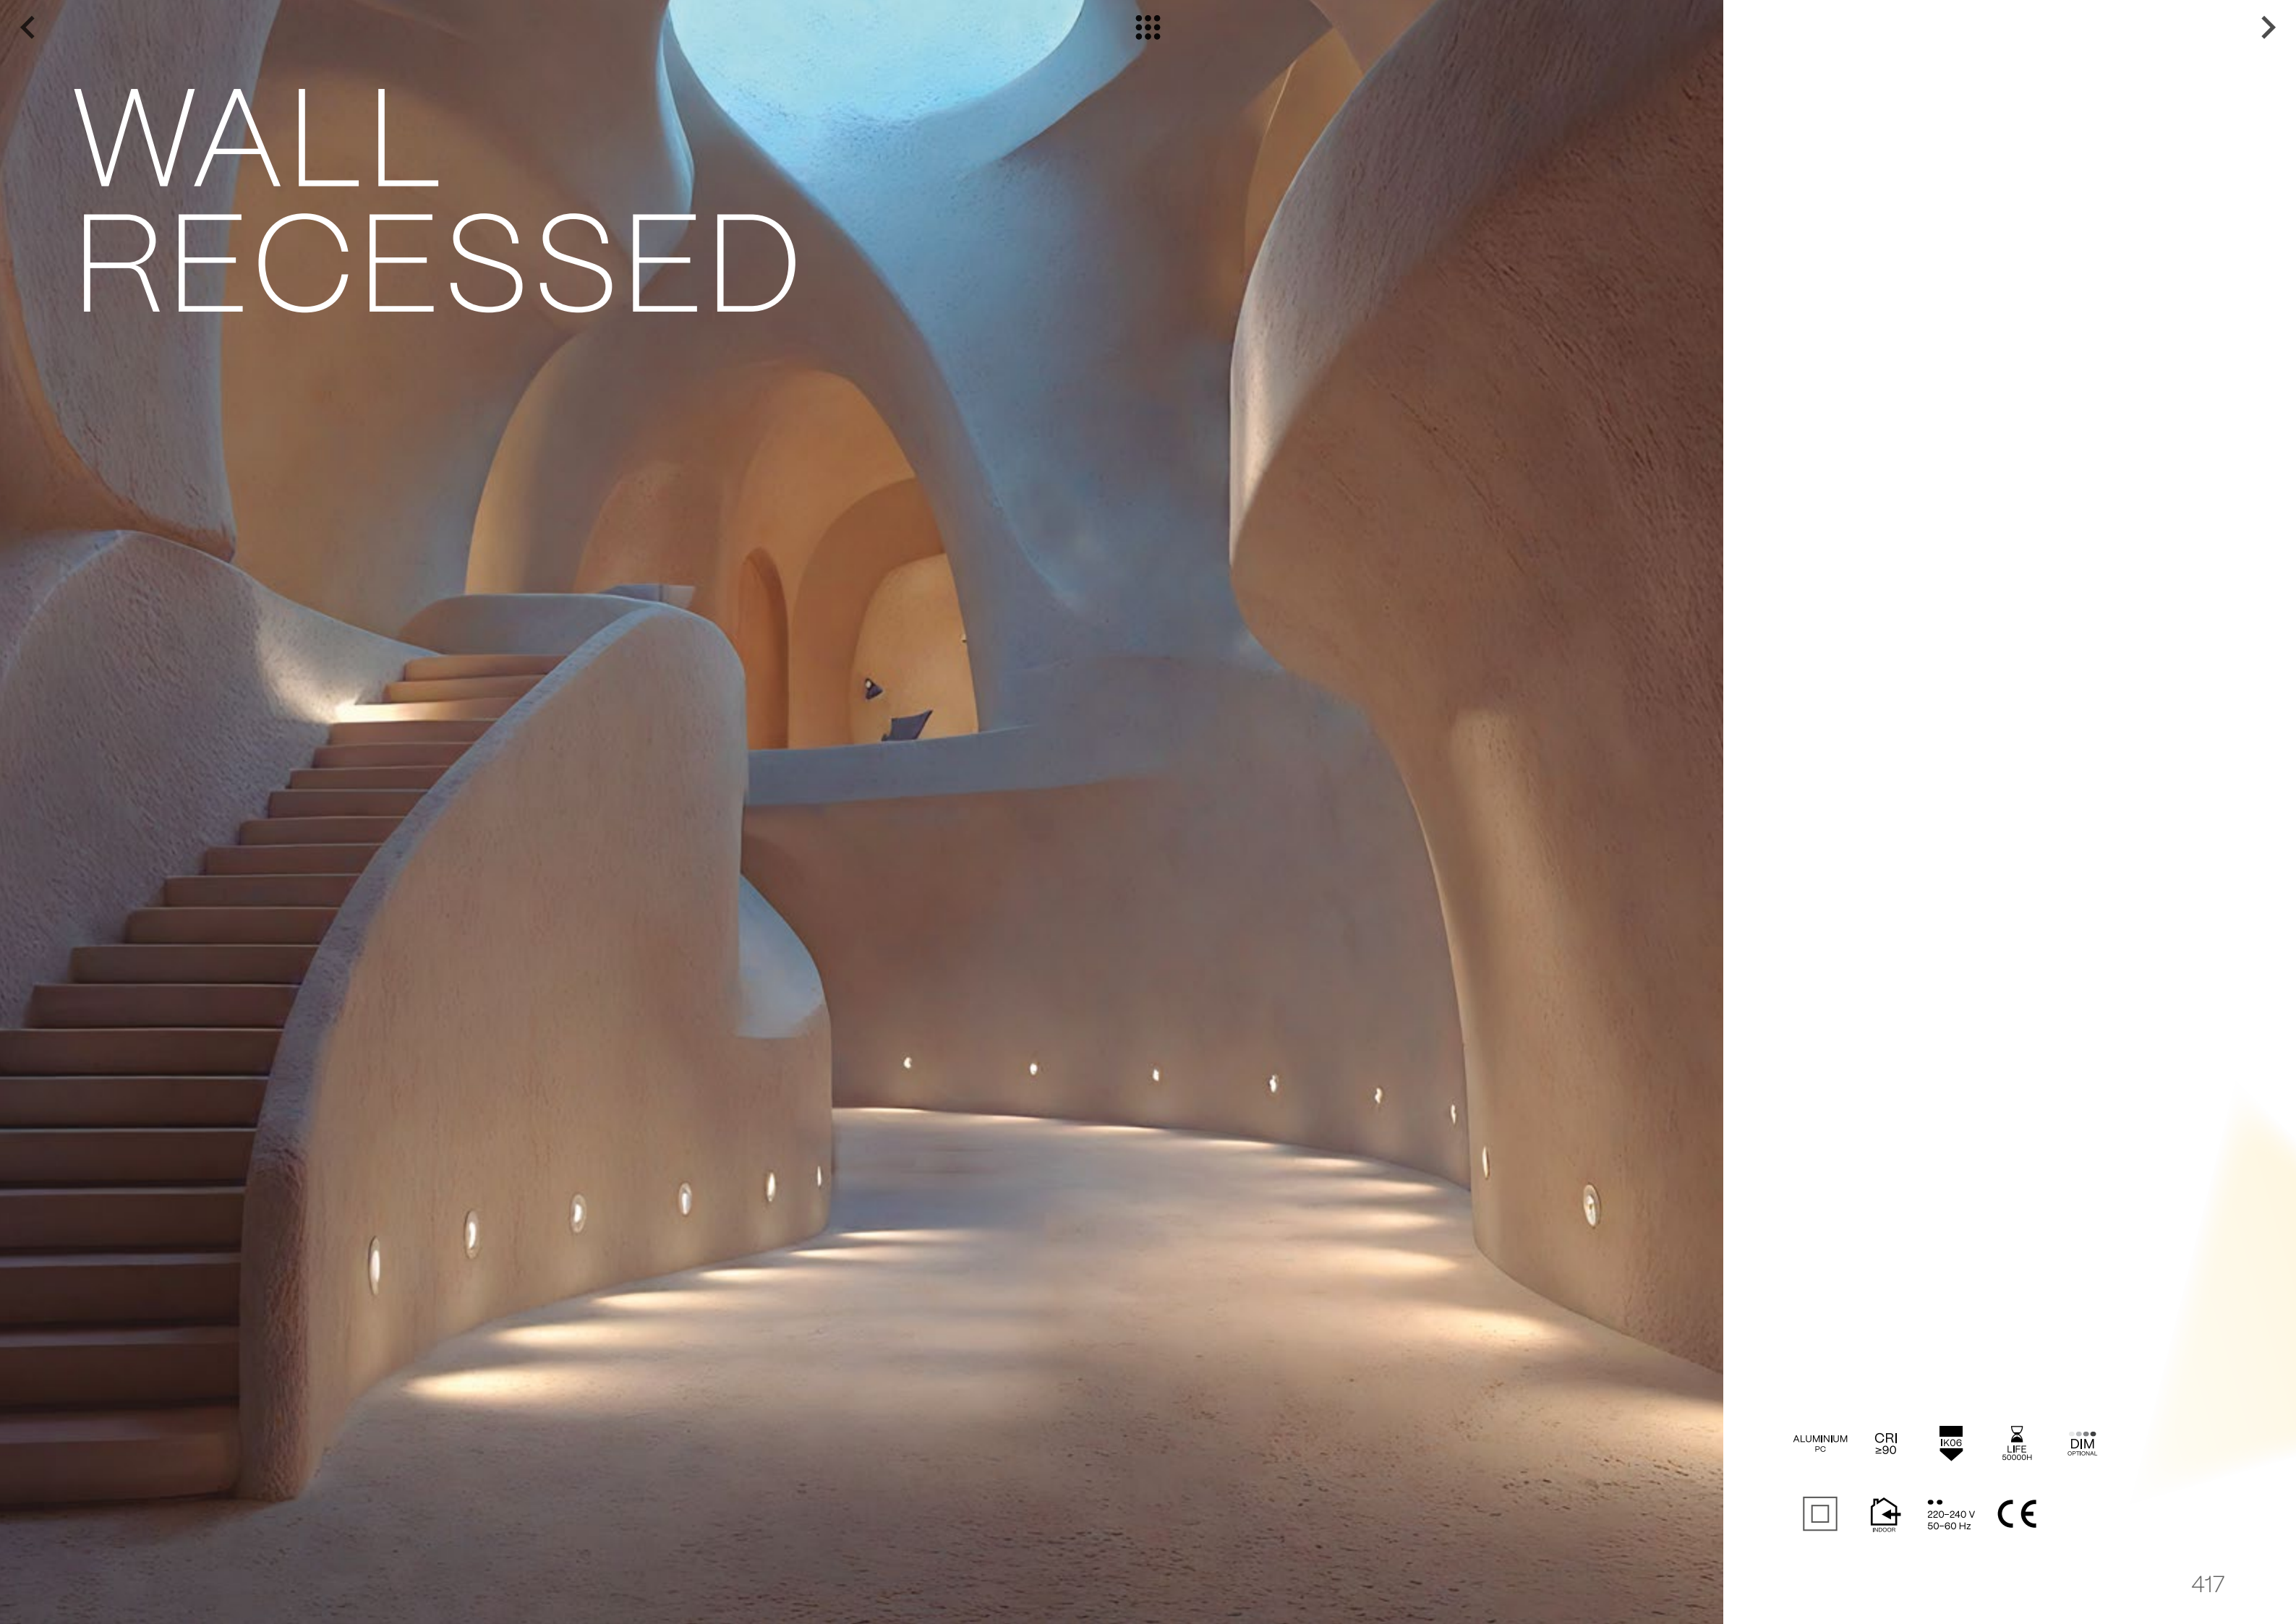

WALL RECESSED

ALUMINIUM
PC

CRI
≥90

IK08

LIFE
50000h

DIM
OPTIONAL



220-240 V
50-60 Hz



WALL RECESSED

MAGRIT


WALL SURFACE		POWER STANDARD	
		MAGRIT Ø46	
		700 mA	2 W 202 - 233 - 251 lm
		2700 K	535EB7 142O
		3000 K	535EB7 143O
	25°	4000 K	535EB7 145O

ADIMA

WALL SURFACE		POWER STANDARD	
		ADIMA Ø34	
		700 mA	2 W 202 - 233 - 251 lm
		2700 K	536EB7 142O
		3000 K	536EB7 143O
	25°	4000 K	536EB7 145O

ADIMA SQ

WALL SURFACE		POWER STANDARD	
		ADIMA SQ 32 x 32	
		700 mA	2 W 202 - 233 - 251 lm
		2700 K	537EB7 142O
		3000 K	537EB7 143O
	25°	4000 K	537EB7 145O



The data shown corresponds to raw values.

- Cut hole
- Cut hole
- Minimum height of the false ceiling
- Side light

FINISH
B · Black
W · White

DIMM OPTIONS
O · On-Off
D · Dali
P · Push

ON DEMAND OPTIONS
 Special finishes


WALL RECESSED

KLEE

WALL SURFACE		POWER STANDARD	
		KLEE Ø40	
		700 mA	2 W 202 - 233 - 251 lm
		2700 K	538EB7 142O
		3000 K	538EB7 143O
	25°	4000 K	538EB7 145O

KLEE SQ

WALL SURFACE		POWER STANDARD	
		KLEE SQ 40 x 40	
		700 mA	2 W 202 - 233 - 251 lm
		2700 K	539EB7 142O
		3000 K	539EB7 143O
	25°	4000 K	539EB7 145O



The data shown corresponds to raw values.

- Cut hole
- Cut hole
- Minimum height of the false ceiling
- Side light

FINISH
B · Black
W · White

DIMM OPTIONS
O · On-Off
D · Dali
P · Push

ON DEMAND OPTIONS
 Special finishes



Confort a través de la luz y el sonido

Diseñada para mejorar el confort visual y acústico, la iluminación acústica integrada combina luz y absorción sonora como parte de un único sistema arquitectónico. Cada proyecto puede desarrollarse a medida, adaptando dimensiones, configuraciones y acabados a las necesidades espaciales y funcionales específicas.

Mediante paneles acústicos personalizados con iluminación integrada y discreta, se reduce la reverberación a la vez que se ofrece una iluminación controlada y de alta calidad. Un planteamiento flexible para interiores profesionales donde deben convivir confort, rendimiento y diseño.

Comfort through light and sound

Designed to enhance both visual and acoustic comfort, integrated acoustic lighting combines light and sound absorption as part of a single architectural system. Each project can be developed to measure, adapting dimensions, configurations and finishes to meet specific spatial and functional requirements.

Through customised acoustic panels with integrated and discreet lighting, reverberation is reduced while controlled, high-quality illumination is provided. A flexible approach for professional interiors where comfort, performance and design must coexist.

ACOUSTIC

ACOUSTIC ALBERTA SOFT
PAG. 428

ACOUSTIC ALABAMA
PAG. 430

ACOUSTIC ALABAMA SQ
PAG. 430

ACOUSTIC ALARIK SLIM
PAG. 432

ACOUSTIC ALBA MINI
PAG. 436

ACOUSTIC ALBA
PAG. 438

ACOUSTIC LAMBDA
PAG. 442

ACOUSTIC ALBALINGGO MINI
PAG. 444

ACOUSTIC ALZIRA
PAG. 448

ACOUSTIC KLIMT FIX
PAG. 450

ACOUSTIC KLIMT FIX SQ
PAG. 450

ACOUSTIC ACCESORIES
PAG. 454

ACOUSTIC



COMFORT THROUGH LIGHT AND SOUND



BPM ACOUSTIC PROJECT
HOTEL MELIÁ ALICANTE



Integrated acoustic lighting combines illumination and sound absorption within a single architectural system, enhancing both visual and acoustic comfort.

We use **recycled PET acoustic panels**, made from 100% polyester fibre with at least 75% post-consumer recycled content.

The material, sourced from recovered plastic waste, is integrated as a responsible and efficient solution.

Each project can be developed **bespoke**, adapting dimensions, configurations and finishes.

Custom panels with **integrated, discreet lighting** reduce reverberation while delivering controlled, high-quality illumination.

La iluminación acústica integrada combina luz y absorción sonora en un único sistema arquitectónico, mejorando el confort visual y acústico del espacio.

*Utilizamos **paneles acústicos de PET reciclado**, compuestos al 100% por fibra de poliéster con al menos un 75% de contenido reciclado posconsumo.*

El material, procedente de residuos plásticos recuperados, se integra como una solución responsable y eficiente.

*Cada proyecto puede desarrollarse **a medida**, adaptando dimensiones, configuraciones y acabados.*

*Paneles personalizados con **iluminación integrada y discreta** reducen la reverberación mientras ofrecen una iluminación controlada y de alta calidad.*


SUSTAINABILITY, ACOUSTICS & LIGHTING IN ONE SOLUTION

CHOOSE THE ACOUSTIC COLOR YOU WANT.
DESIGN ANY SHAPE.
COMBINE IT HOWEVER YOU LIKE.
INTEGRATE LIGHT WHEREVER YOU IMAGINE.


COLORS




56




52




50




51




57



55



54



61



60

&
MORE



FIRE RATING
ASTM-E84 Class A
EN 13501 Bst0d



THERMAL INSULATION



DURABILITY



EASY INSTALLATION
Reduced labor costs



ACOUSTIC PERFORMANCE
and reverberation control
0,8 / α_w - 0,85 NRC



LIGHTWEIGHT



BREATHABLE



100% POLYESTER PET FIBER,
of 75% post-consumer
recycled content

SHAPES



Rectangle



Square



Circle




Oval



Triangle



Diamond



Hexagon




Custom

CUT PATTERNS



Circular




Linear




Wavy




Irregular




Regular



Geometric



Degraded



Custom

HOLES



10 mm



8 mm



6 mm



4 mm



2 mm



4 mm



6 mm



8 mm



PENDANT




SURFACE




WALL SURFACE


DESIGNS



Overlap



Assembly



Stepped



Intersection



Division



Custom

PRINT




Monocolor




Multicolor

LUMINAIRE INTEGRATION




Acoustic around the luminaire



Acoustic composition with luminaires



Acoustic above the luminaire



Custom

ACOUSTIC ALBERTA SOFT

ALUMINIUM SILICONE CRI ≥90 IK06 LIFE 50000H DIM OPTIONAL IP40

220-240 V 50-60 Hz


REMOTE INDOOR

CE








ACOUSTIC ALBERTA SOFT


1. PENDANT

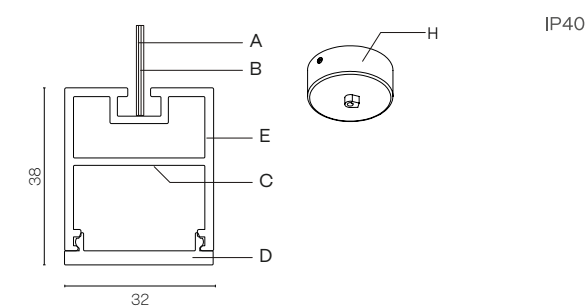

POWER HIGH

						
		Int. Ø286 - Ext. Ø350	Int. Ø386 - Ext. Ø450	Int. Ø586 - Ext. Ø650	Int. Ø886 - Ext. Ø950	Int. Ø1186 - Ext. Ø1250
	700 mA	56 W 5280 - 5316 - 5844 lm	76 W 7086 - 7121 - 7747 lm	88 W 8785 - 9040 - 9687 lm	132 W 13298 - 13519 - 14703 lm	176 W 17816 - 18118 - 18135 lm
Silicone	2700 K	556EC1 312	556ED1 312	556EF1 312	556EI1 312	556EK1 312
	3000 K	556EC1 313	556ED1 313	556EF1 313	556EI1 313	556EK1 313
	4000 K	556EC1 315	556ED1 315	556EF1 315	556EI1 315	556EK1 315

Silicone



LUMINAIRE INCLUDES

3 x Suspension cables 3m
1 x Feed Hose 3 x 0,75mm² (.125 1 Feed Hose 5 x 0,75mm²)
Electric system
Connection Box CB03 + Driver Box CB04.OP
Cover Kit

The data shown corresponds to raw values.

A - Aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser
E - Aluminium profile
H - Included connection box

 Down light

FINISH
K · Special color - White
L · Special color - Black

DIMM OPTIONS
O · On-Off
D · Dali
P · Push
V · 1,10v



ACOUSTIC ALABAMA

- ALUMINIUM
PC
- CRI
≥90
- IK06
- LIFE
50000h
- DIM
OPTIONAL
- IP40
-
- INTEGRATED
- INDOOR
- 220-240 V
50-60 Hz
- CE






ACOUSTIC ALABAMA / ALABAMA SQ


POWER STANDARD – ACOUSTIC ROUND ALABAMA

		 Ø800	 Ø1000	 Ø1200
Opal	 500 mA	17 W 2454 – 2907 – 3129 lm	17 W 2454 – 2907 – 3129 lm	17 W 2454 – 2907 – 3129 lm
	2700 K	557EB1  112 	557EE1  112 	557EH1  112 
	3000 K	557EB1  113 	557EE1  113 	557EH1  113 
	4000 K	557EB1  115 	557EE1  115 	557EH1  115 

POWER STANDARD – ACOUSTIC SQUARE ALABAMA

		 800 800	 1000 1000	 1200 1200
Opal	 500 mA	17 W 2454 – 2907 – 3129 lm	17 W 2454 – 2907 – 3129 lm	17 W 2454 – 2907 – 3129 lm
	2700 K	558EB1  112 	558EE1  112 	558EH1  112 
	3000 K	558EB1  113 	558EE1  113 	558EH1  113 
	4000 K	558EB1  115 	558EE1  115 	558EH1  115 

Opal



LUMINAIRE INCLUDES

- 3 x Suspension cables 3m
- NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm2
- DIM DOWN: 1 x Feed Hose 5 x 0,75mm2
- Connection box CB03 with luminaire's finish

The data shown corresponds to raw values.

 Down light

FINISH

- K · Special color – White
- L · Special color – Black

DIMM OPTIONS


- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

ACOUSTIC ALARIK SLIM




ACOUSTIC ALARIK SLIM

PENDANT

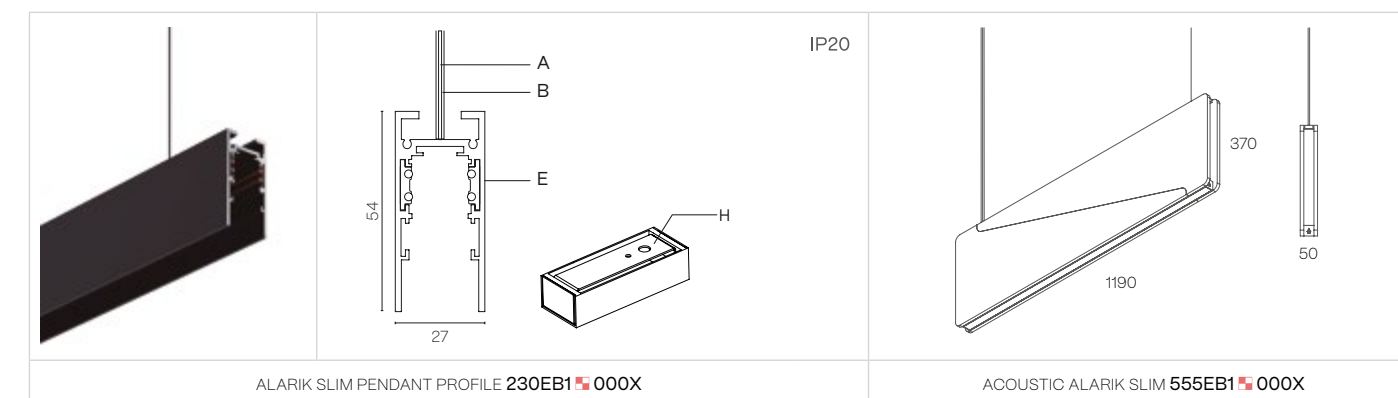

Multiple module configurations available. See page 166 for all Alarik Slim options, modules and power outputs.

MODULES

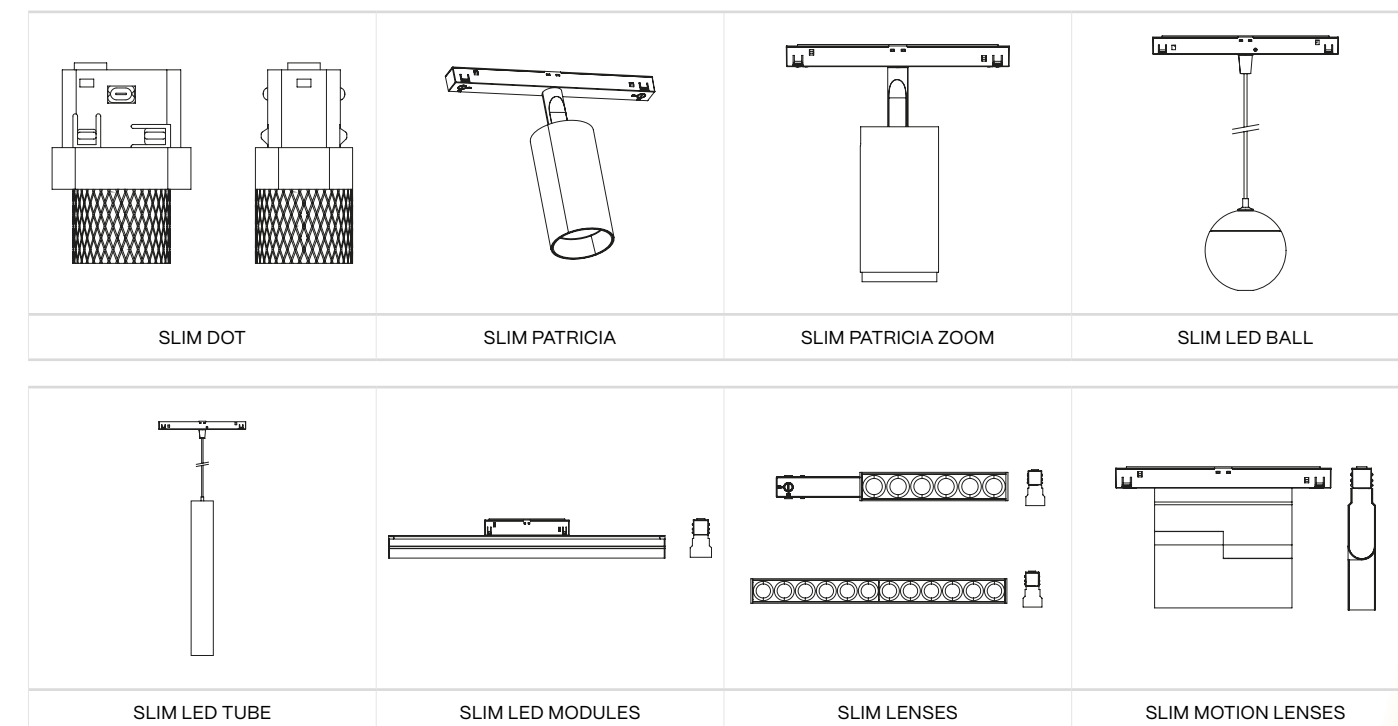

A - Aircraft cable (3 m)
B - Power cable
E - Aluminium profile
H - Included connection box

Down light

FINISH
K - Special color - White
L - Special color - Black

DIMM OPTIONS
O - On-Off
D - Dali
P - Push
V - 1,10v



ACOUSTIC ALBA MINI


ALUMINIUM PC CRI ≥90 IK06 LIFE 50000H DIM OPTIONAL IP40

INTEGRATED INDOOR 220-240 V 50-60 Hz CE




ACOUSTIC ALBA MINI

1. PENDANT

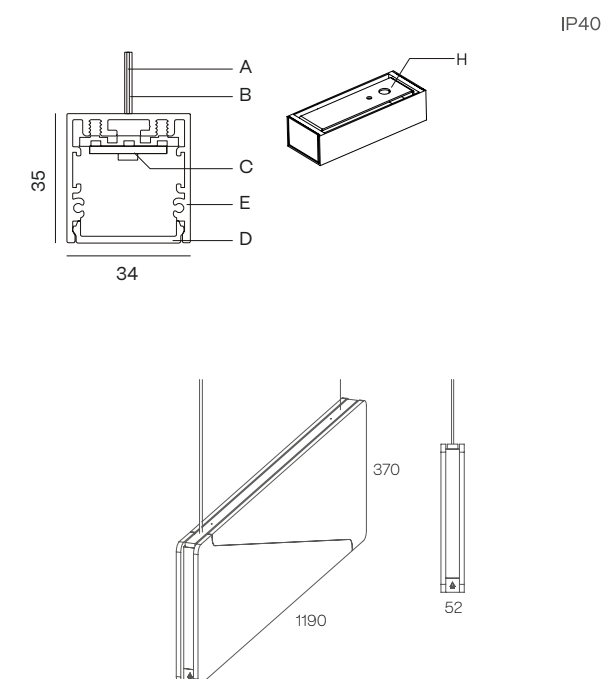

POWER STANDARD

		PENDANT	
Opal	500 mA	22 W 3272 - 3876 - 4172 lm	
	2700 K	554EB1 112	
	3000 K	554EB1 113	
	4000 K	554EB1 115	
Microprismatic	2700 K	554EB1 122	
	3000 K	554EB1 123	
	4000 K	554EB1 125	

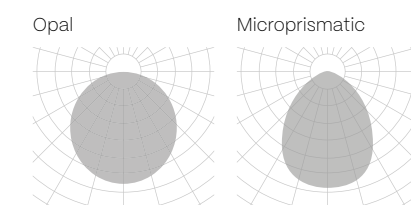

The data shown corresponds to raw values.

- A - Aircraft cable (3 m)
- B - Power cable
- C - LED module
- D - Diffuser
- E - Aluminium profile
- H - Included connection box

Down light

- FINISH**
- K - Special color - White
 - L - Special color - Black

- DIMM OPTIONS**
- O - On-Off
 - D - Dali
 - P - Push
 - V - 1.10v

LUMINAIRE INCLUDES
2 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm2
DIM DOWN: 1 x Feed Hose 5 x 0,75mm2
Diffuser
Cover Kit
Connection Box CB09.12

ACOUSTIC ALBA

ALUMINIUM PC CRI ≥90 IK06 LIFE 50000H DIM OPTIONAL IP40


INTEGRATED INDOOR 220-240 V 50-60 Hz CE

Designed by **Rafa Ortega**
Diseñado por **Rafa Ortega**




ACOUSTIC ALBA

1. PENDANT

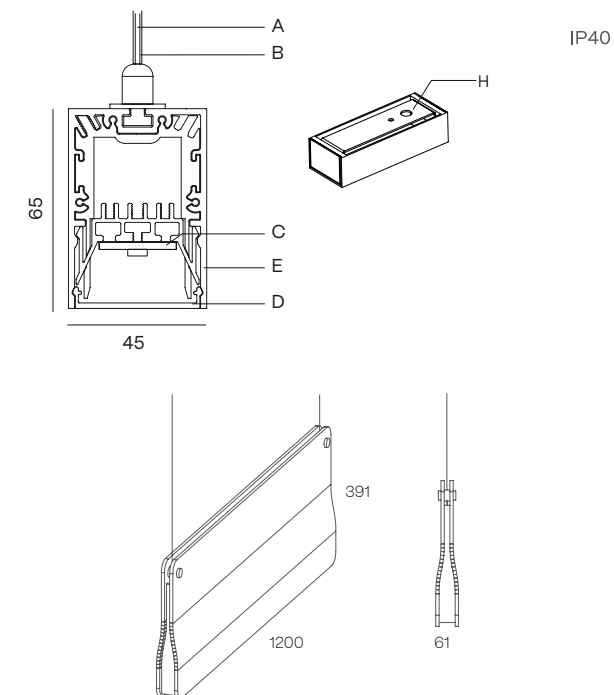


2. SURFACE

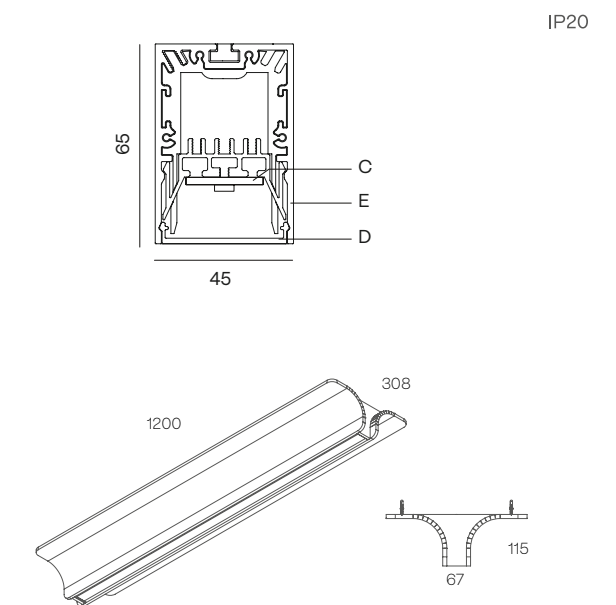

POWER STANDARD

		PENDANT	SURFACE
Opal	500 mA	22 W 3272 - 3876 - 4172 lm	22 W 3272 - 3876 - 4172 lm
	2700 K	551EB1 112	551EB3 112
	3000 K	551EB1 113	551EB3 113
	4000 K	551EB1 115	551EB3 115
Microprismatic	2700 K	551EB1 122	551EB3 122
	3000 K	551EB1 123	551EB3 123
	4000 K	551EB1 125	551EB3 125

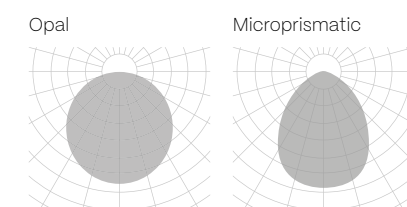

The data shown corresponds to raw values.

A - Aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser
E - Aluminium profile
H - Included connection box

Down light

LUMINAIRE INCLUDES
2 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm2
DIM DOWN: 1 x Feed Hose 5 x 0,75mm2
Diffuser - Cover Kit
Connection Box CB09.12
Surface mounting kit

FINISH
K - Special color - White
L - Special color - Black

DIMM OPTIONS
O - On-Off
D - Dali
P - Push
V - 1.10v



02 | ACOUSTIC ALABAMA SUPER SLIM



ACOUSTIC LAMBDA


ALUMINIUM PC
CRI ≥90
IK06
LIFE 50000H
DIM OPTIONAL
IP40

INTEGRATED
INDOOR
220-240 V
50-60 Hz
CE




ACOUSTIC LAMBDA

1. PENDANT

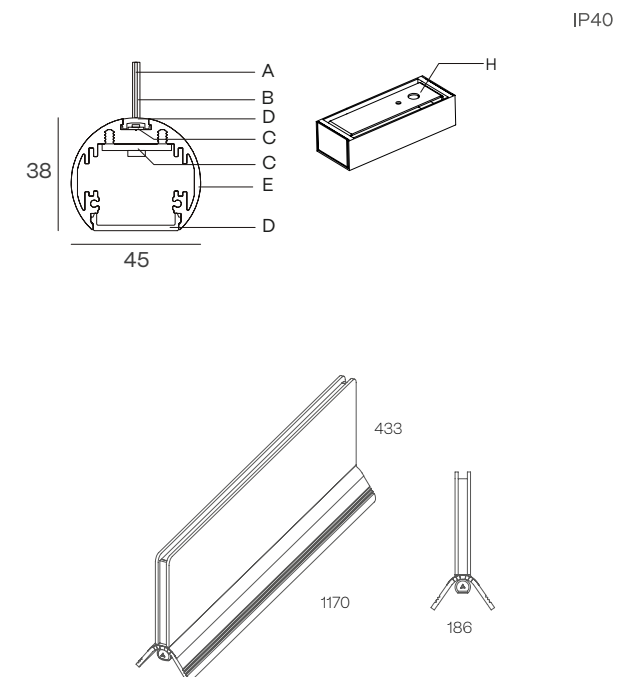


2. SURFACE

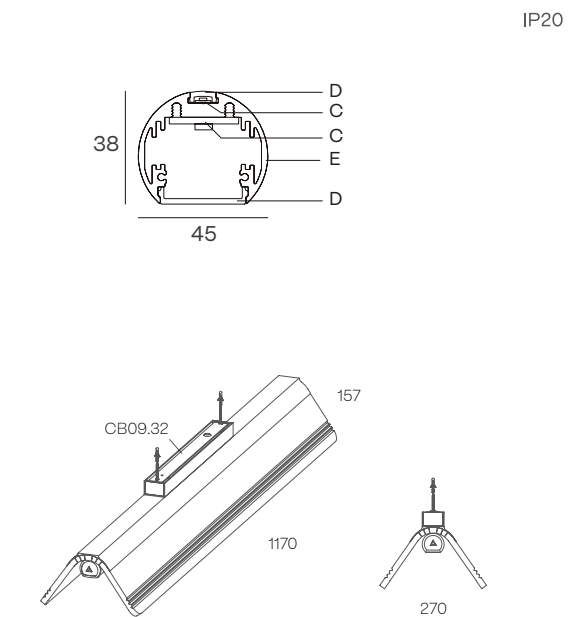

POWER STANDARD

		PENDANT	SURFACE
Opal	500 mA	22 W 3272 - 3876 - 4172 lm	22 W 3272 - 3876 - 4172 lm
	2700 K	553EB1 112 ✖	553EB3 112 ✖
	3000 K	553EB1 113 ✖	553EB3 113 ✖
	4000 K	553EB1 115 ✖	553EB3 115 ✖
Microprismatic	2700 K	553EB1 122 ✖	553EB3 122 ✖
	3000 K	553EB1 123 ✖	553EB3 123 ✖
	4000 K	553EB1 125 ✖	553EB3 125 ✖

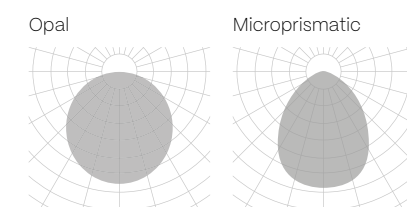

The data shown corresponds to raw values.

A - Aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser
E - Aluminium profile
H - Included connection box

Down light

LUMINAIRE INCLUDES
2 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Diffuser
Cover Kit
Connection Box CB09.12
Surface mounting kit

FINISH
K - Special color - White
L - Special color - Black

DIMM OPTIONS
O - On-Off
D - Dali
P - Push
V - 1.10v

ACOUSTIC ALBA LINGGO MINI

ALUMINIUM
PC

CRI
≥90

IK06

LIFE
50000H

DIM
OPTIONAL

IP40


⊕

REMOTE

INDOOR

220-240 V
50-60 Hz



CE

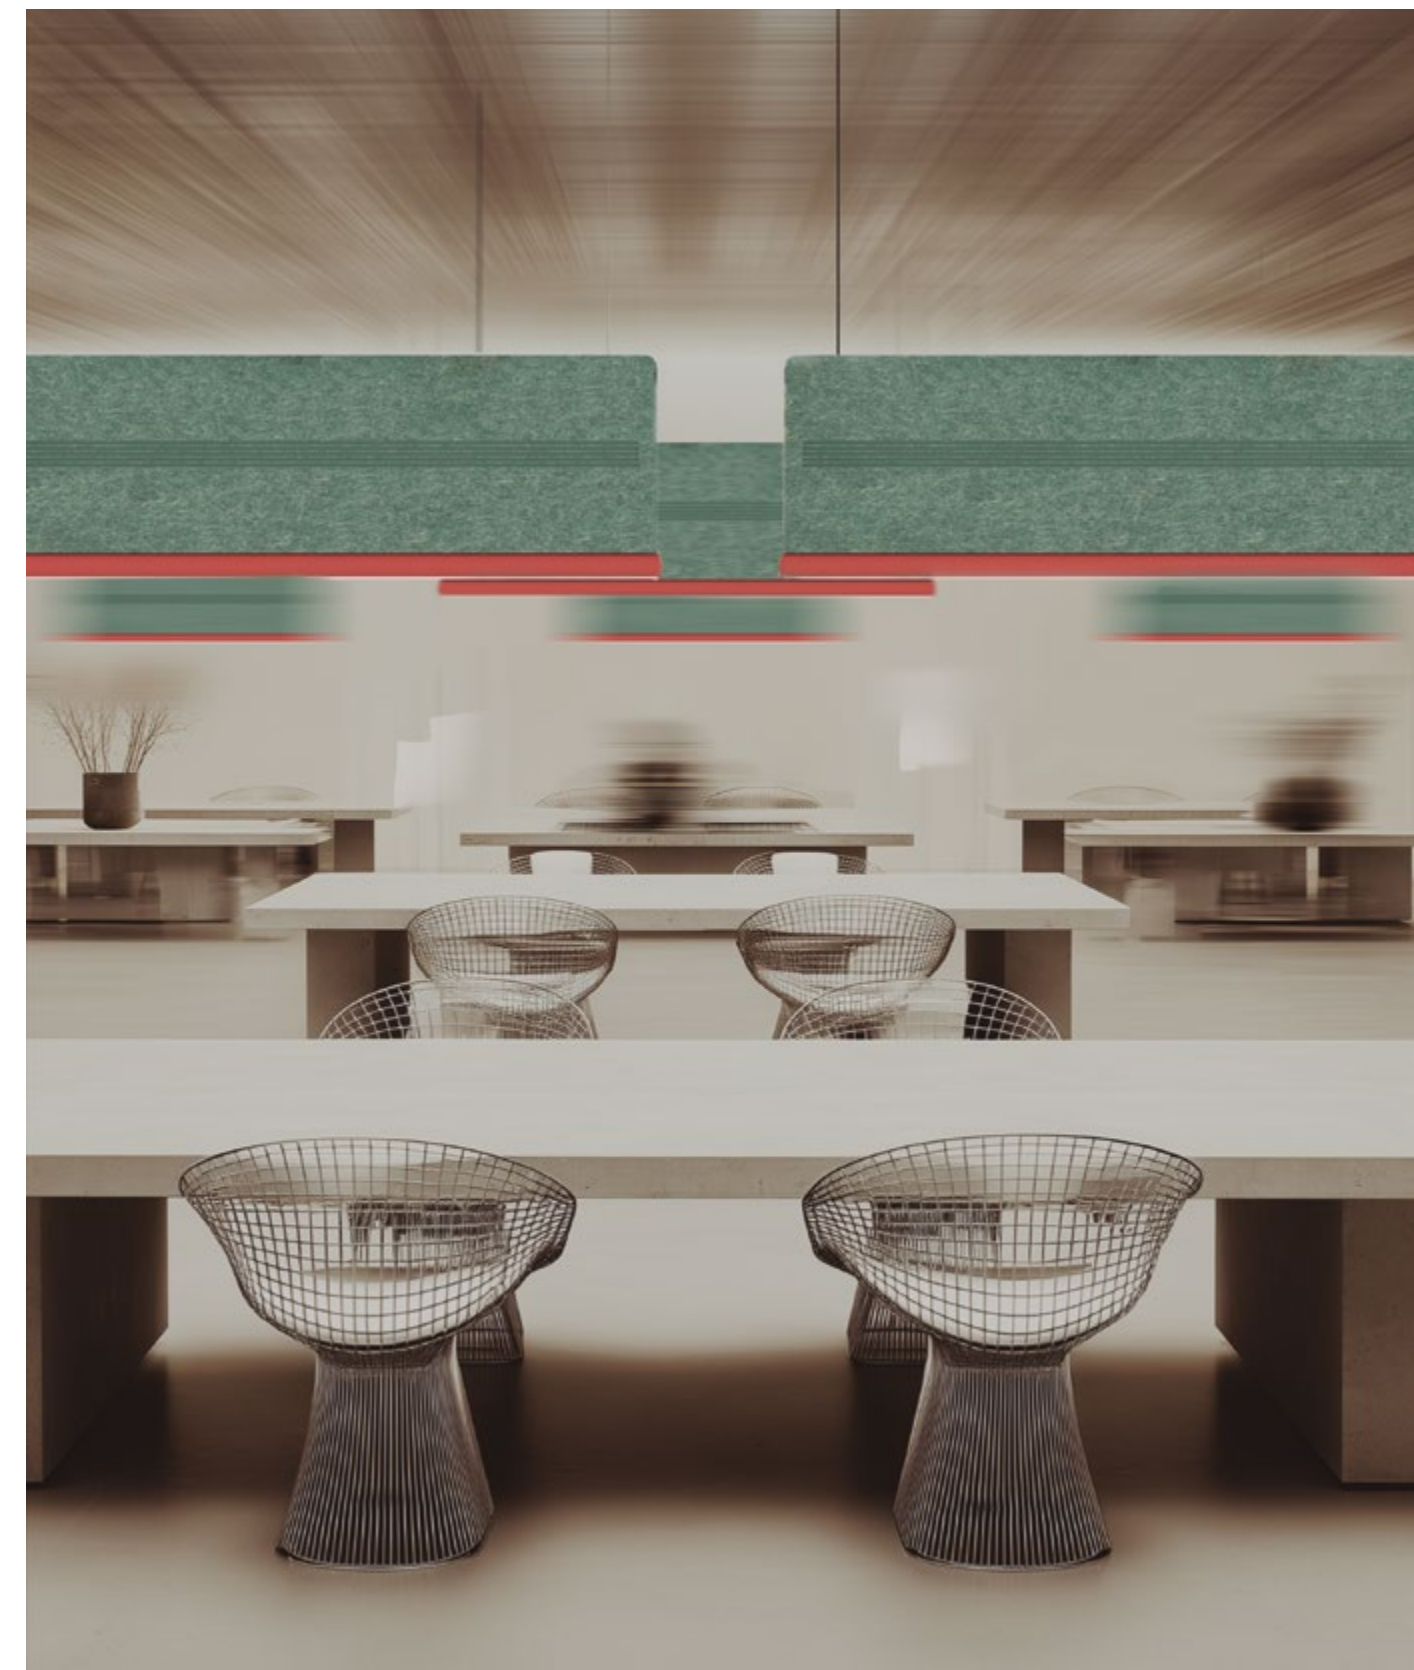

ACOUSTIC LINGGO MINI

1. PENDANT


IP40

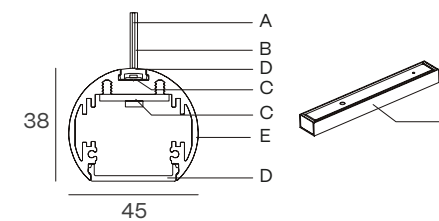


POWER STANDARD

		PENDANT	
Opal	500 mA	22 W 3272 - 3876 - 4172 lm	
	2700 K	552EB1 112	
	3000 K	552EB1 113	
	4000 K	552EB1 115	
Microprismatic	2700 K	552EB1 122	
	3000 K	552EB1 123	
	4000 K	552EB1 125	

Opal



Microprismatic



The data shown corresponds to raw values.

A - Aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser
E - Aluminium profile
H - Included connection box

Down light

LUMINAIRE INCLUDES


2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
Diffuser
Cover Kit
Connection Box (CB09.32)

FINISH


K - Special color - White
L - Special color - Black

DIMM OPTIONS

O - On-Off
D - Dali
P - Push
V - 1.10v

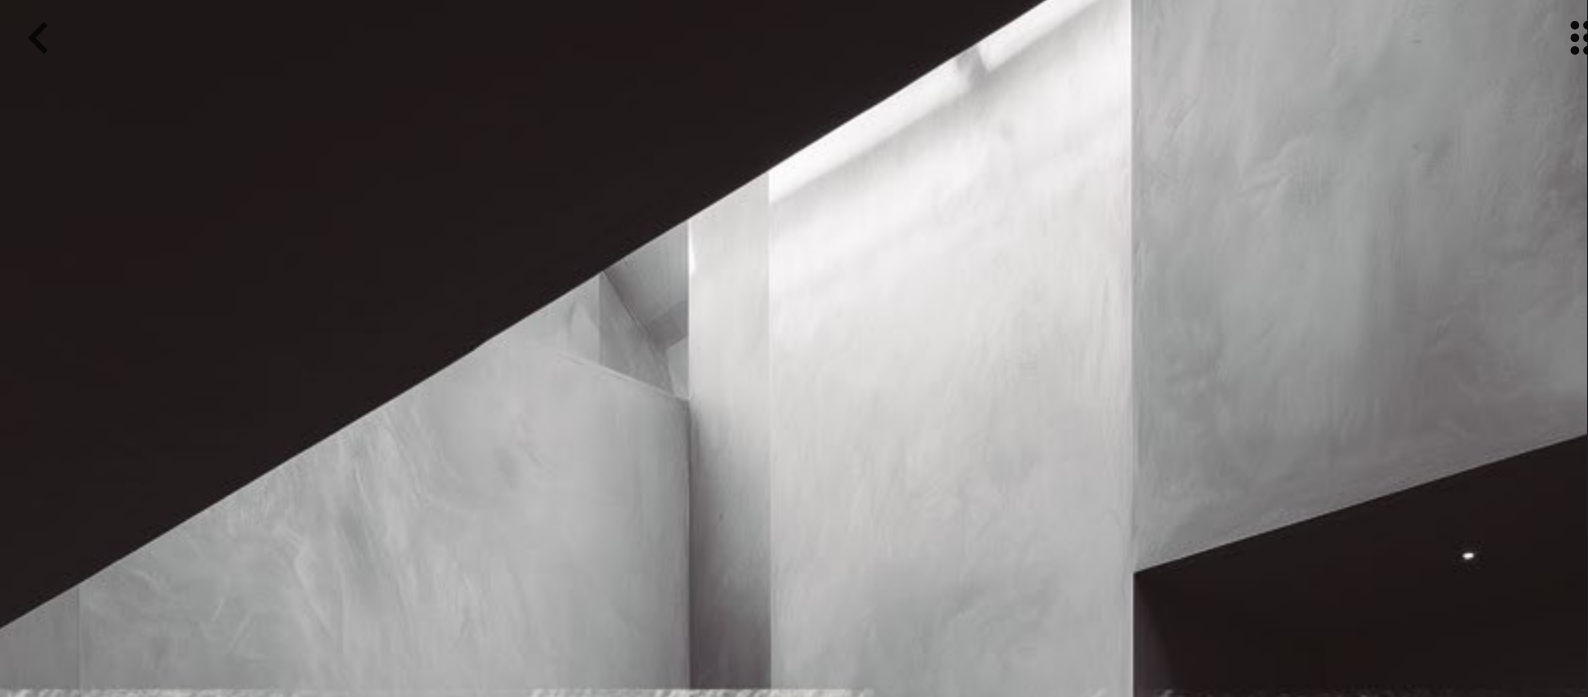

ALARIK NANO ACOUSTIC SYSTEM - CONCEPT DESIGN

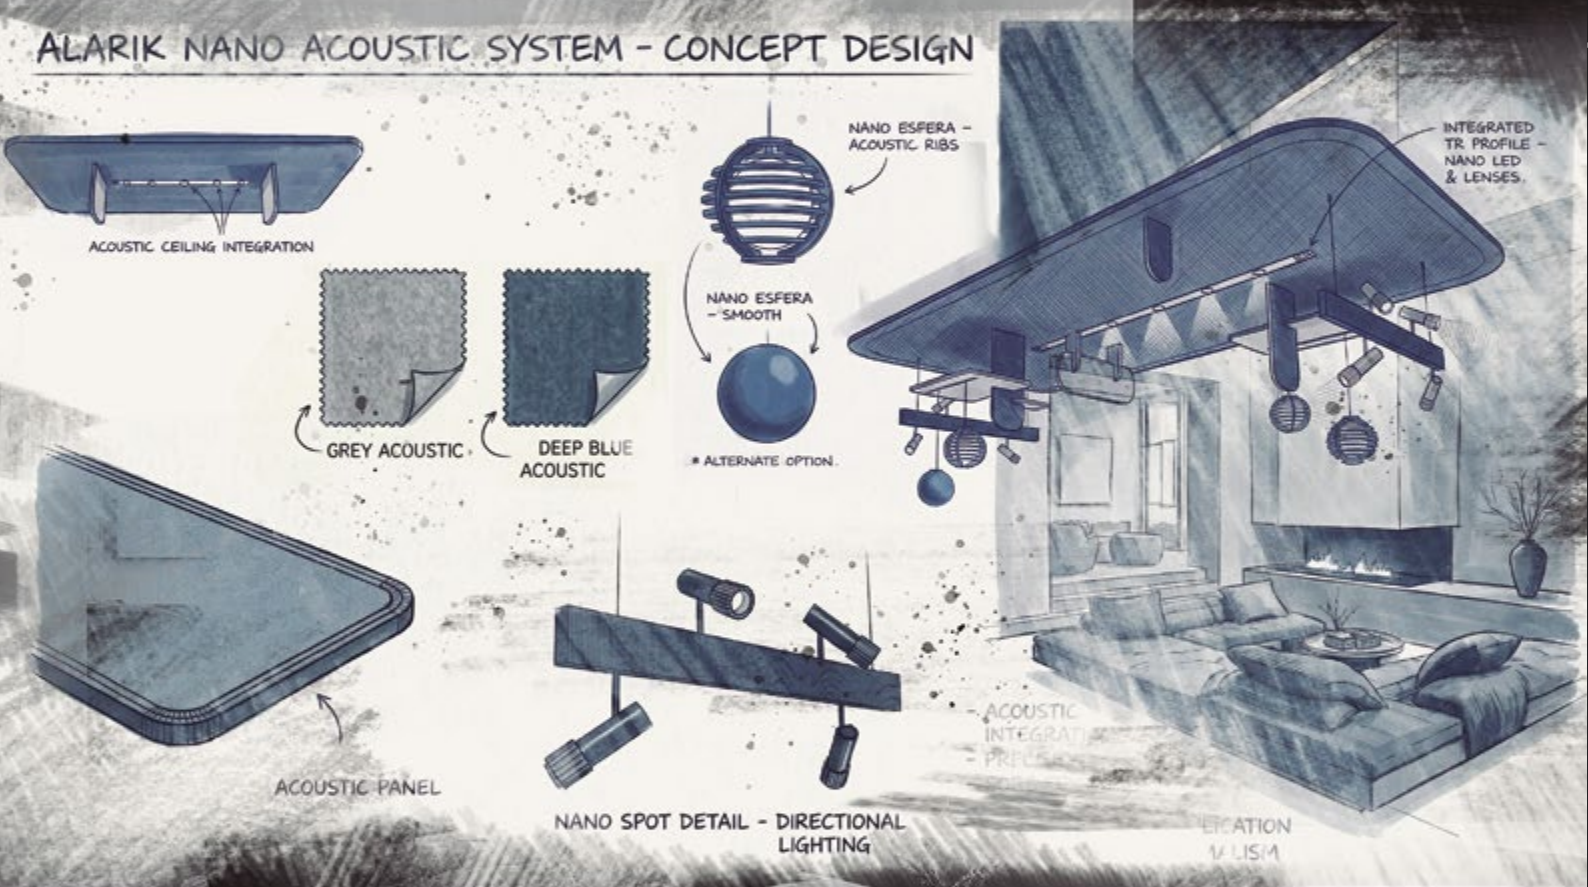

ACOUSTIC ALZIRA




Designed by **Rafa Ortega**
Diseñado por **Rafa Ortega**




ACOUSTIC ALZIRA

1. PENDANT

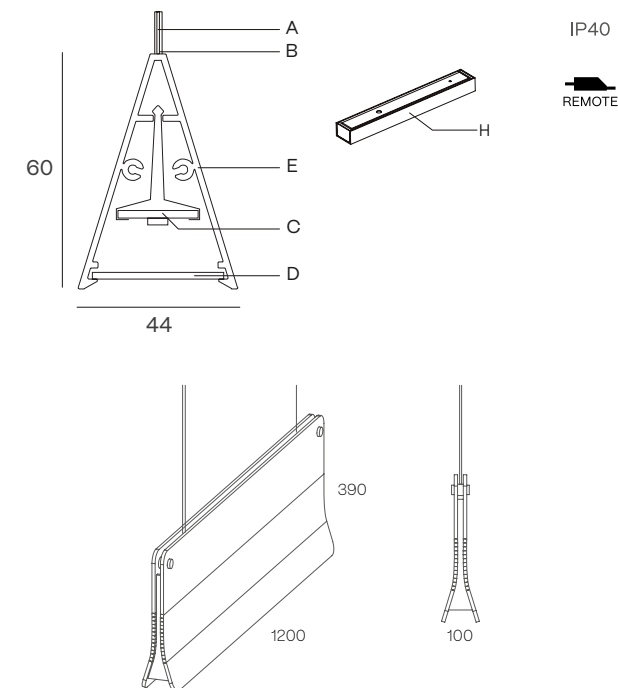


2. WALL SURFACE

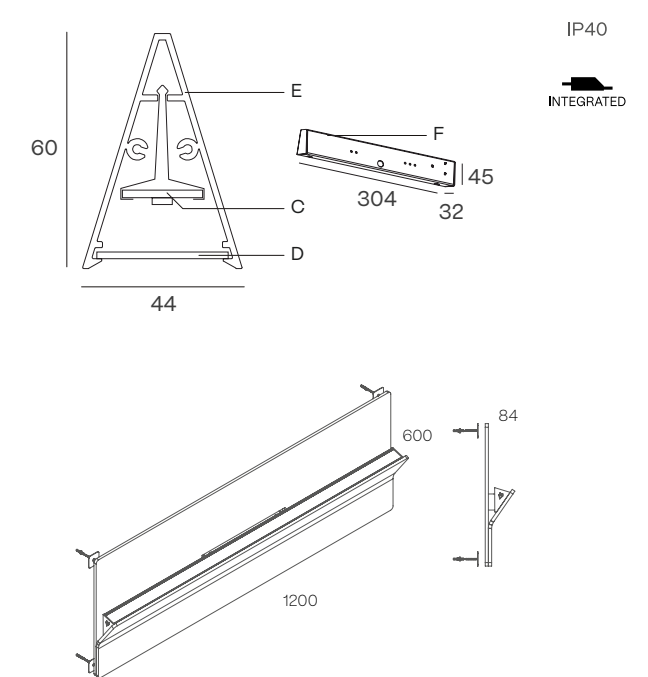

POWER STANDARD

		PENDANT	WALL SURFACE
Opal	500 mA	22 W 3272 - 3876 - 4172 lm	22 W 3272 - 3876 - 4172 lm
	2700 K	550EB1 112	550EB7 112
	3000 K	550EB1 113	550EB7 113
	4000 K	550EB1 115	550EB7 115
Microprismatic	2700 K	550EB1 122	550EB7 122
	3000 K	550EB1 123	550EB7 123
	4000 K	550EB1 125	550EB7 125

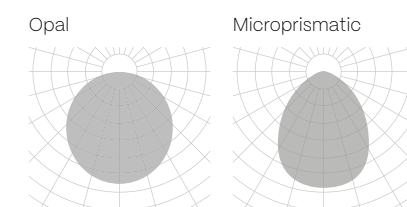

The data shown corresponds to raw values.

LUMINAIRE INCLUDES
2 x suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm2
Connection Box (CB09.32)
Cover Kit
Diffuser

A - Aircraft cable (3 m)
B - Power cable
C - LED module
D - Diffuser
E - Aluminium profile
F - Mounting kit
H - Included connection box

Down light


FINISH
K - Special color - White
L - Special color - Black

DIMM OPTIONS
O - On-Off
D - Dali
P - Push
V - 1,10v

ACOUSTIC KLIMT FIX



ALUMINIUM PC
CRI ≥90
IK06
LIFE 50000h
DIM OPTIONAL
IP20

□
REMOTE
INDOOR
220-240 V 50-60 Hz
CE



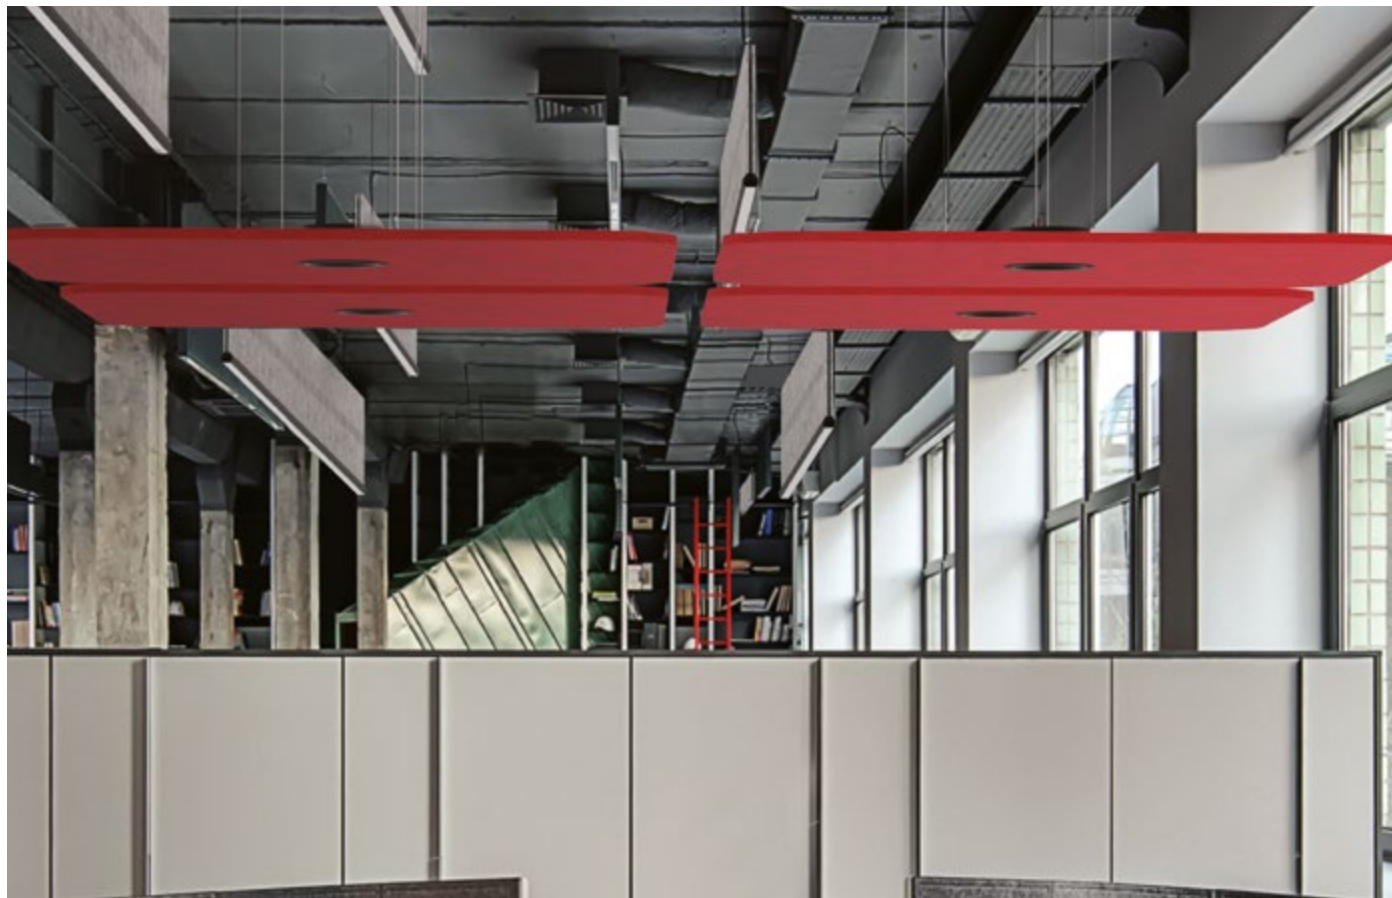



ACOUSTIC KLIMT FIX / KLIMT FIX SQ

POWER STANDARD – ACOUSTIC ROUND KLIMT FIX

				
	500 mA	12 W 1735 – 1766 – 1844 lm	12 W 1735 – 1766 – 1844 lm	12 W 1735 – 1766 – 1844 lm
15° – 25° – 38° – 60°	2700 K	559EB1 1 1 2 ✖	559EE1 1 1 2 ✖	559EH1 1 1 2 ✖
	3000 K	559EB1 1 1 3 ✖	559EE1 1 1 3 ✖	559EH1 1 1 3 ✖
	4000 K	559EB1 1 1 5 ✖	559EE1 1 1 5 ✖	559EH1 1 1 5 ✖

POWER STANDARD – ACOUSTIC SQUARE KLIMT FIX

				
	500 mA	12 W 1735 – 1766 – 1844 lm	12 W 1735 – 1766 – 1844 lm	12 W 1735 – 1766 – 1844 lm
15° – 25° – 38° – 60°	2700 K	560EB1 1 1 2 ✖	560EE1 1 1 2 ✖	560EH1 1 1 2 ✖
	3000 K	560EB1 1 1 3 ✖	560EE1 1 1 3 ✖	560EH1 1 1 3 ✖
	4000 K	560EB1 1 1 5 ✖	560EE1 1 1 5 ✖	560EH1 1 1 5 ✖

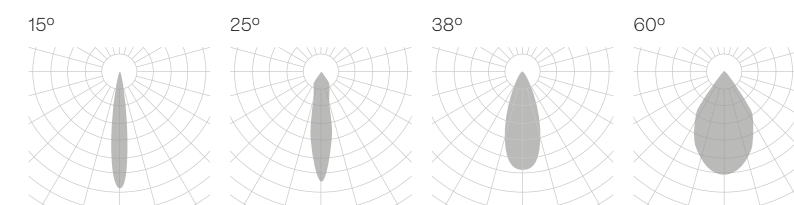

The data shown corresponds to raw values.


 Down light

 **FINISH**
K · Special color – White
L · Special color – Black

 **BEAM ANGLE**
2 · 15°
4 · 25°
5 · 38°
7 · 60°

 **DIMM OPTIONS**
O · On-Off
D · Dali
P · Push
V · 1.10v

LUMINAIRE INCLUDES
3 x Suspension cables 3m
1 x Feed Hose 3 x 0,75mm²
Connection box CB03 BK or WH finish

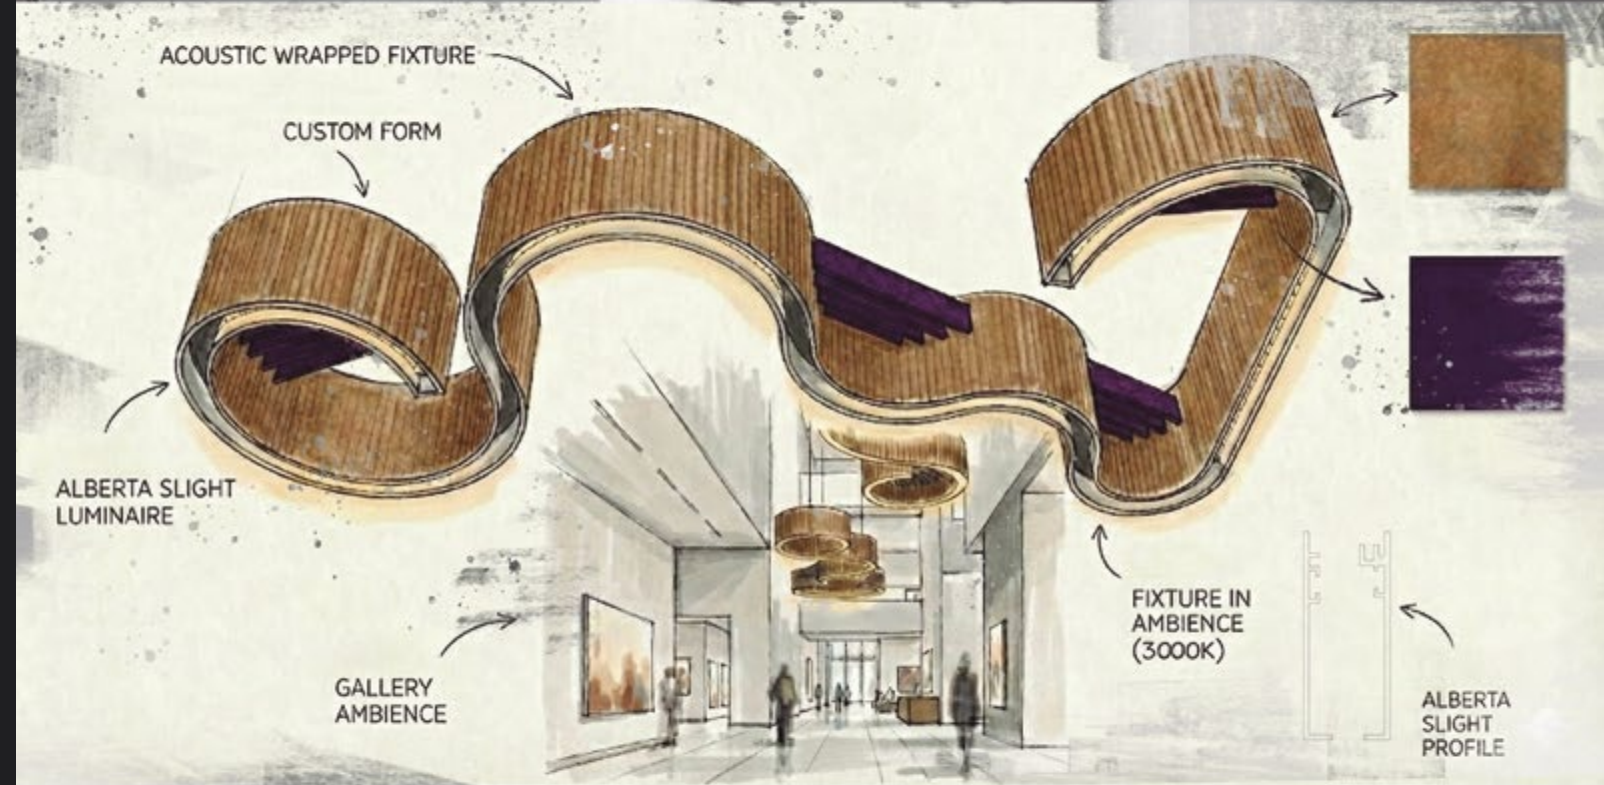

04 | ACOUSTIC ALBERTA SLIGHT CUSTOM





ACOUSTIC ACCESSORIES






ACOUSTIC ACCESSORIES



PENDANT ACCESSORIES

 Ø800	 Ø1000	 Ø1200	 800x800	 1000x1000	 1200x1200
AC.RD.01.PN. 	AC.RD.02.PN. 	AC.RD.03.PN. 	AC.SQ.01.PN. 	AC.SQ.02.PN. 	AC.SQ.03.PN. 
	 2400 300 2400 600	 2400 600		 2400 300 2400 600	 2400 600
	AC.VT.01.PN. 	AC.VT.02.PN. 		AC.FL.01.PN. 	AC.FL.02.PN. 

SURFACE ACCESSORIES

 Ø800	 Ø1000	 Ø1200	 800x800	 1000x1000	 1200x1200
AC.RD.01.SR. 	AC.RD.02.SR. 	AC.RD.03.SR. 	AC.SQ.01.SR. 	AC.SQ.02.SR. 	AC.SQ.03.SR. 
	 2400 300 2400 600	 2400 600		 2400 300 2400 600	 2400 600
	AC.VT.01.PN. 	AC.VT.02.SR. 		AC.FL.01.SR. 	AC.FL.02.SR. 

MD PANEL

	 600 600	 1200 600
	AC.MD.01.RF. 	AC.MD.02.RF. 

 **FINISH**
S - Special color



La luz más allá del interior

Diseñada para integrarse de forma natural en el entorno exterior, la luz prolonga la intención arquitectónica más allá del interior. Recorridos, volúmenes y superficies se definen con precisión, permitiendo que los espacios exteriores se comprendan, se utilicen y se vivan también de noche.

Desarrollada para responder a las condiciones del exterior, la iluminación combina una construcción robusta con una distribución controlada de la luz, garantizando confort visual, durabilidad y una transición fluida entre la arquitectura interior y exterior.

Light beyond the interior

Designed to integrate naturally into outdoor environments, light extends architectural intent beyond interior spaces. Paths, volumes and surfaces are defined with precision, allowing exterior spaces to be read, used and experienced after dark.

Developed to respond to outdoor conditions, outdoor lighting combines robust construction with controlled light distribution, ensuring visual comfort, durability and a seamless transition between interior and exterior architecture.

OUTDOOR

WALL ARA OUT

PAG. 460

WALL ZAHARA OUT

PAG. 462

WALL DRACO OUT

PAG. 464

OUTDOOR





WALL ARA OUT

CRISMOSIL

CRI ≥90

IK08

LIFE 50000H

DIM OPTIONAL

INTEGRATED

OUTDOOR


220-240 V
50-60 Hz

CE



WALL ARA OUT

L172

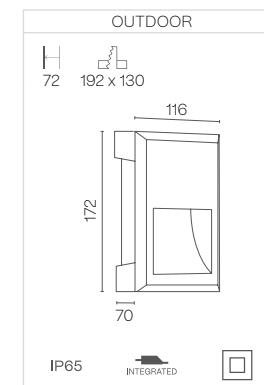

POWER STANDARD – Wall recessed installation

		L172	
Opal	310 mA	4 W 389 – 401 – 436 lm	
	2700 K	685EB7X112O	
	3000 K	685EB7X113O	
	4000 K	685EB7X115O	

The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling

Down light

LUMINAIRE INCLUDES
Recessed mounting kit



WALL ZAHARA OUT

CEMENT

CRI ≥90

IK08

LIFE 50000H

DIM OPTIONAL

INTEGRATED

OUTDOOR


220-240 V
50-60 Hz

CE



WALL ZAHARA OUT

L381

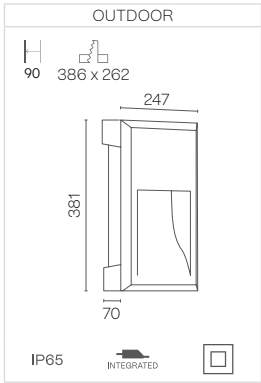

POWER STANDARD – Wall recessed installation

		L381	
Opal	550 mA	9 W 484 – 510 – 534 lm	
	2700 K	687EB7X112O	
	3000 K	687EB7X113O	
	4000 K	687EB7X115O	

The data shown corresponds to raw values.

Cut hole

Minimum height of the false ceiling

Down light

LUMINAIRE INCLUDES
Recessed mounting kit



WALL DRACO OUT

CEMENT

CRI ≥90

IK08

LIFE 50000H

DIM OPTIONAL

INTEGRATED

OUTDOOR


220-240 V
50-60 Hz

CE



WALL DRACO OUT

L370

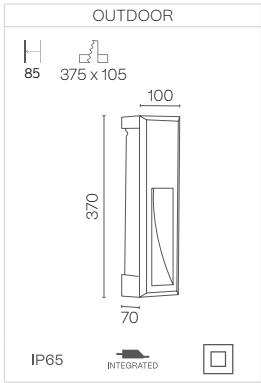

POWER STANDARD – Wall recessed installation

		L370	
Opal	290 mA	5 W 465 – 480 – 525 lm	
	2700 K	686EB7X112O	
	3000 K	686EB7X113O	
	4000 K	686EB7X115O	

The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling

Down light

LUMINAIRE INCLUDES
Recessed mounting kit



Cuando la luz se convierte en materia

Desarrollado y elaborado artesanalmente en España, Crismosil® es el material exclusivo de BPM Lighting, creado para integrar la luz de forma natural en la arquitectura. La combinación de yeso técnico, fibra de vidrio y resinas acrílicas ofrece la resistencia del aluminio junto a una estética pura, continua y arquitectónica.

Cada pieza se fabrica a mano con precisión, permitiendo una personalización total en formas, colores y texturas. Más que un material, Crismosil® refleja el compromiso de BPM Lighting con el diseño, la artesanía y una producción responsable y local.

Crismosil® · When light becomes matter

Developed and handcrafted in Spain, Crismosil® is BPM Lighting's exclusive material, created to integrate light seamlessly into architecture. By combining technical plaster, fiberglass and acrylic resins, it achieves the strength of aluminium with a pure, continuous and architectural aesthetic.

Each piece is handmade with precision, allowing full customisation in shapes, colours and textures. More than a material, Crismosil® embodies BPM Lighting's approach to design, craftsmanship and responsible, local production.

CRISMOSIL

NUVOL

PAG. 470

WAVE FAMILY

PAG. 474

SAND

PAG. 480

MENORCA FAMILY

PAG. 486

ALBA PRO CRISMOSIL

PAG. 494

ZENIT FAMILY

PAG. 500

VEGA FAMILY

PAG. 518

ESPIGA FAMILY

PAG. 528

ORBIT FAMILY

PAG. 538

DRACO FAMILY


PAG. 544

TYRA FAMILY

PAG. 552

CRISMOSIL



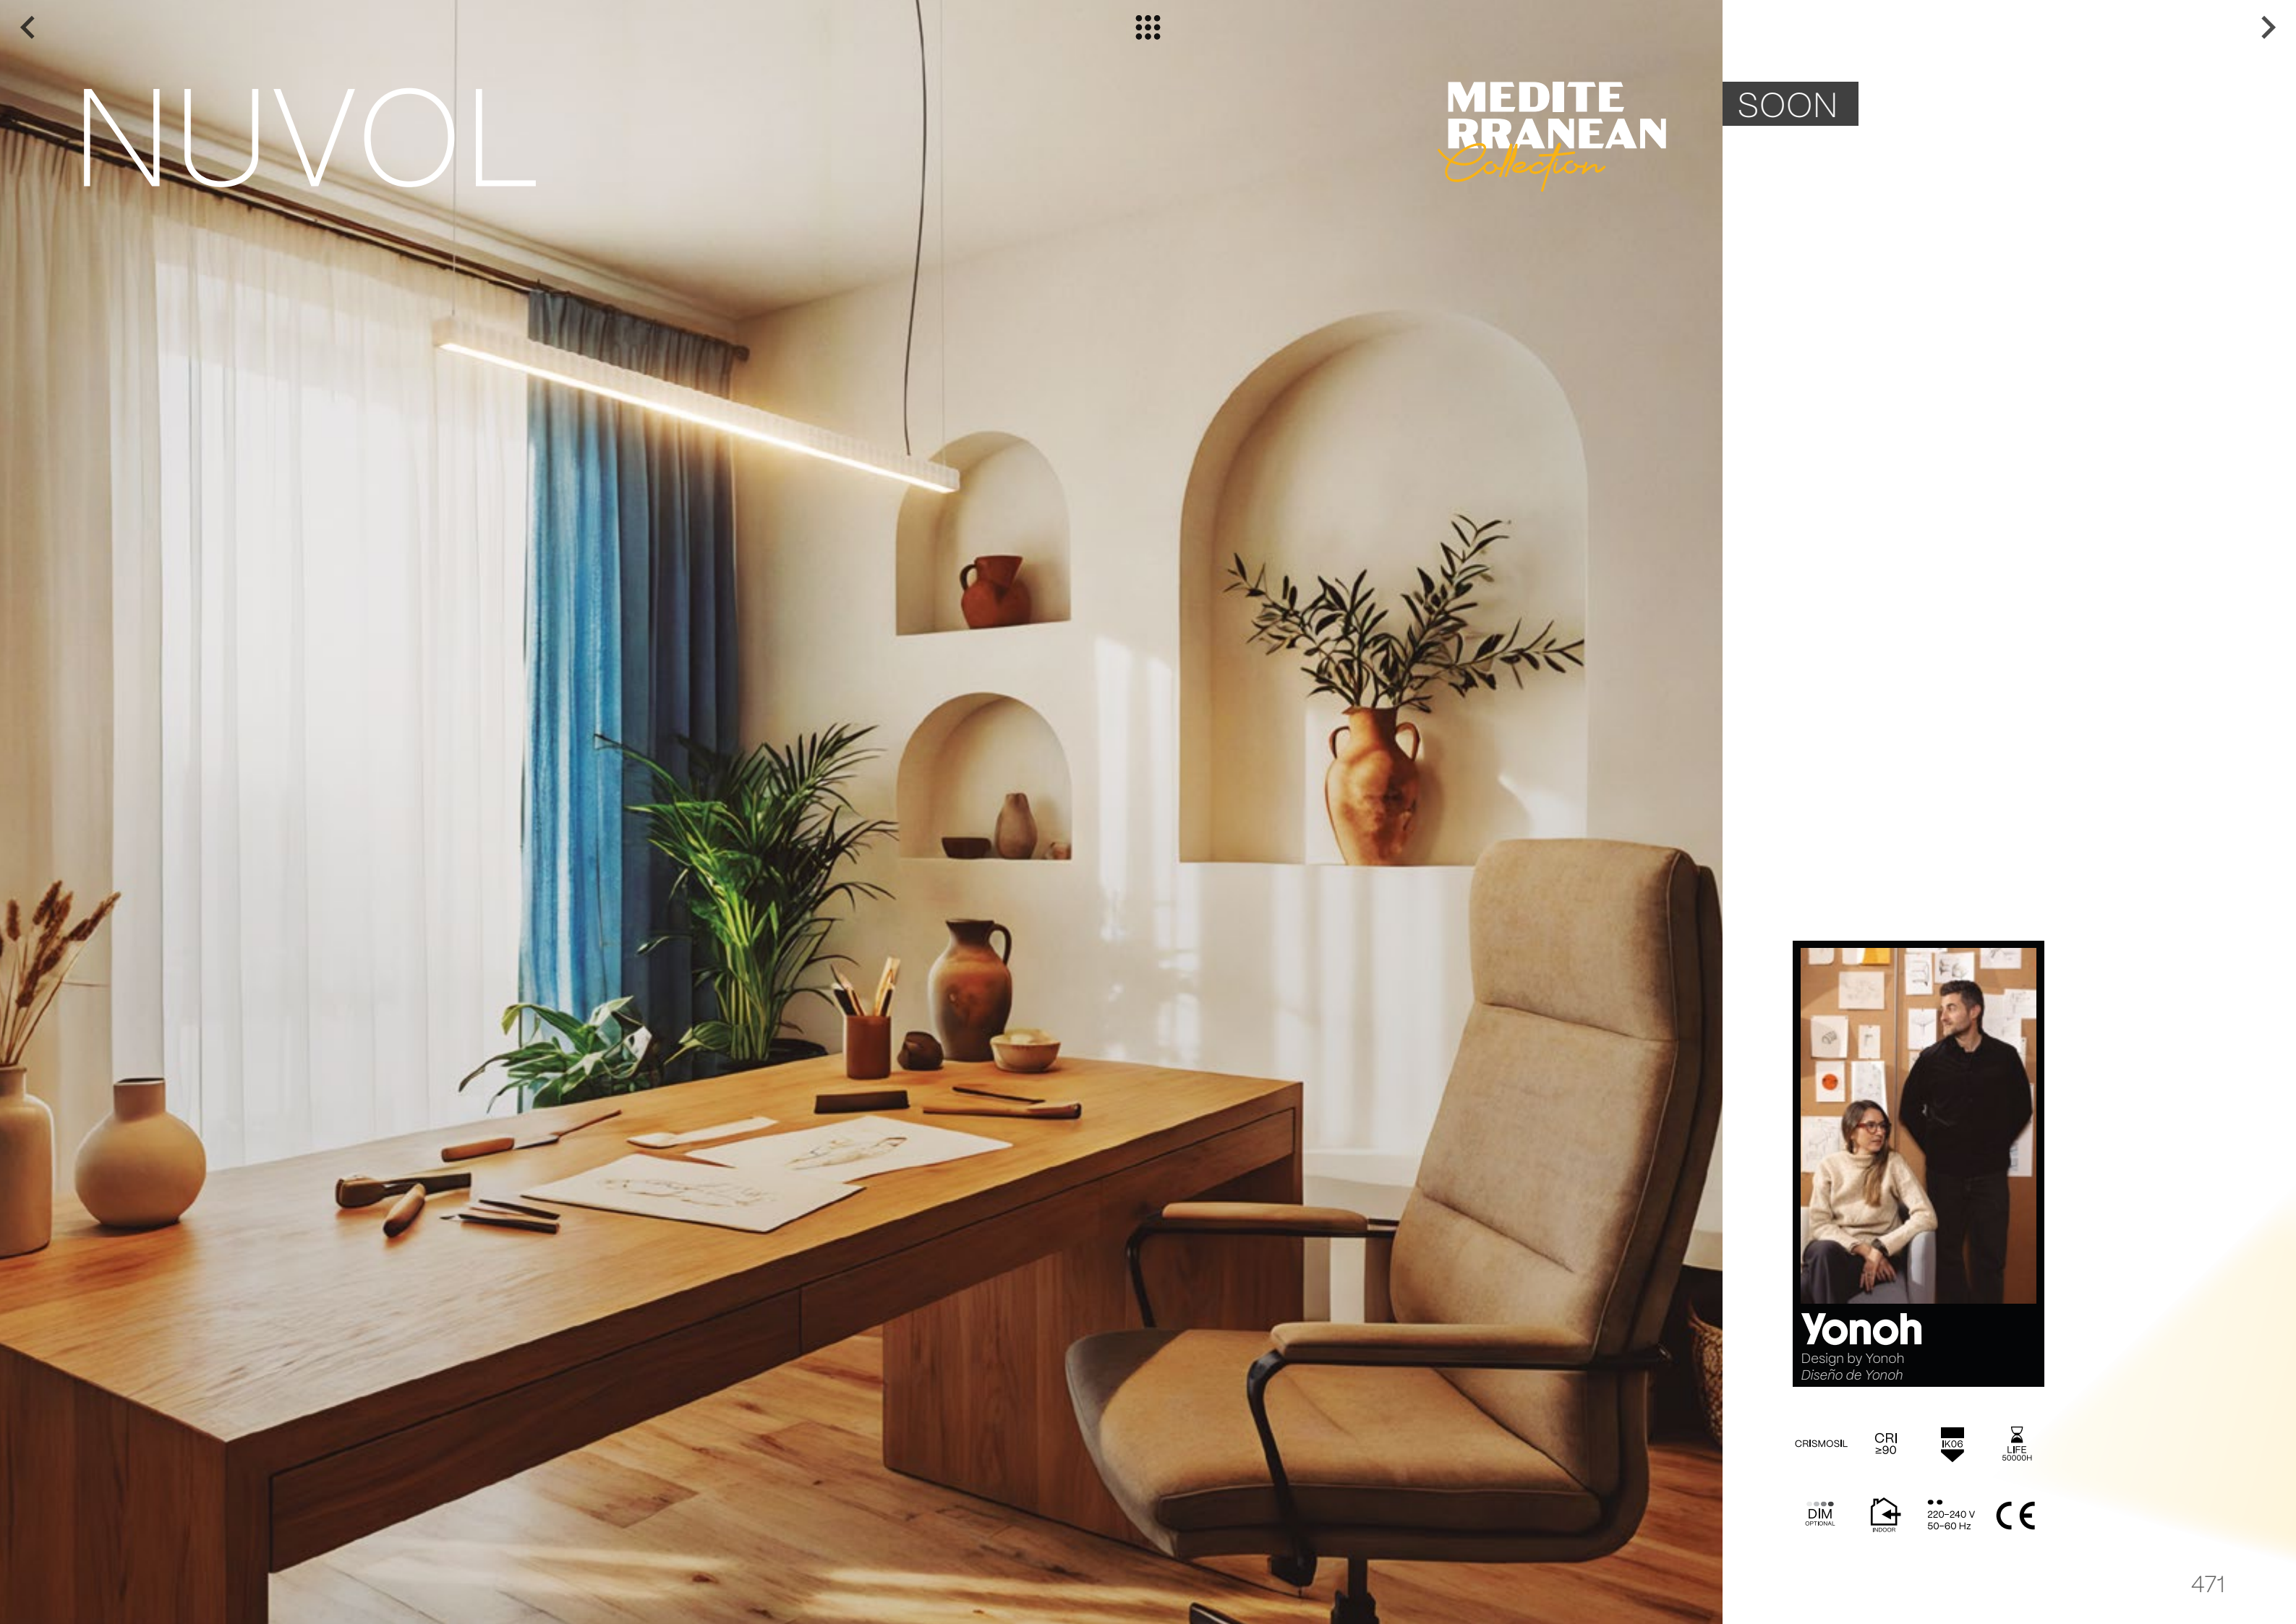

NUVOL

MEDITE
RRANEAN
Collection

SOON



CRISMOSIL

CRI

≥90

IK06

LIFE

50000h


DIM
OPTIONAL

INDOOR


220-240 V
50-60 Hz

CE

1. PENDANT

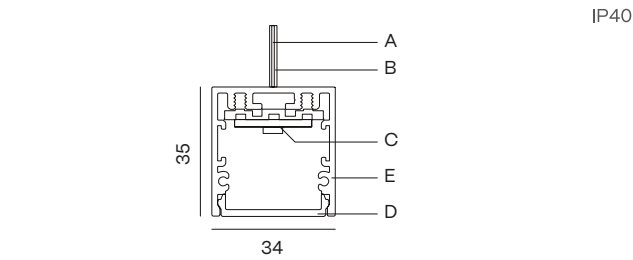

Section detail



- ELECTRIC SYSTEM LENGTH mm.**

843 · 1124 · 1405 · 1686
- A** – Aircraft cable (3 m)

B – Power cable

C – LED module

D – Diffuser

E – Aluminium profile

POWER STANDARD

		1405	
Opal	500 mA	28 W 4090 – 4845 – 5215 lm	
	2700 K	635EL1 112	
	3000 K	635EL1 113	
	4000 K	635EL1 115	
Microprismatic	2700 K	635EL1 122	
	3000 K	635EL1 123	
	4000 K	635EL1 125	

POWER HIGH

		1405	
Opal	500 mA	56 W 8430 – 9690 – 10430 lm	
	2700 K	635EL1 312	
	3000 K	635EL1 313	
	4000 K	635EL1 315	
Microprismatic	2700 K	635EL1 322	
	3000 K	635EL1 323	
	4000 K	635EL1 325	

The data shown corresponds to raw values.

- FINISH**

B · Black

W · White

S · Special color
- DIMM OPTIONS**

O · On–Off

D · Dali

P · Push

V · 1.10v
- Down light

WAVE FAMILY

MEDITERRANEAN
Collection



Yonoh
Design by Yonoh
Diseño de Yonoh

CRISMOSIL

CRI
≥90

IK06

LIFE
50000H

DIM
OPTIONAL



REMOTE



220-240 V
50-60 Hz







WAVE

NEW

1. PENDANT

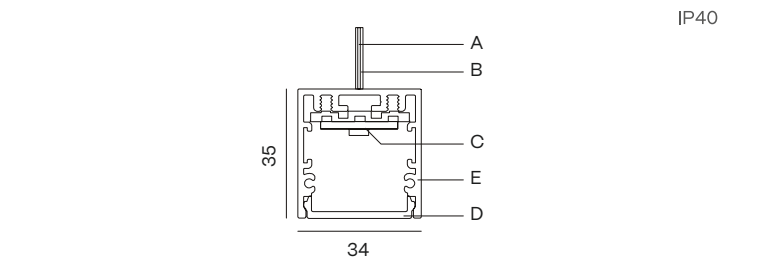

ELECTRIC SYSTEM LENGTH mm.	
1405	
843 / 1124 (Cominig soon)	
	A – Aircraft cable (3 m)
	B – Power cable
	C – LED module
	D – Diffuser
	E – Aluminium profile

WAVE

POWER STANDARD

		1405	
	500 mA	28 W 4090 – 4845 – 5215 lm	
	2700 K	665EL1 112	
	3000 K	665EL1 113	
	4000 K	665EL1 115	
Microprismatic	2700 K	665EL1 122	
	3000 K	665EL1 123	
	4000 K	665EL1 125	

POWER HIGH

		1405	
	500 mA	56 W 8430 – 9690 – 10430 lm	
	2700 K	665EL1 312	
	3000 K	665EL1 313	
	4000 K	665EL1 315	
Microprismatic	2700 K	665EL1 322	
	3000 K	665EL1 323	
	4000 K	665EL1 325	


The data shown corresponds to raw values.

FINISH	DIMM OPTIONS	Down light
B · Black	O · On-Off	
W · White	D · Dali	
S · Special color	P · Push	
	V · 1.10v	

WAVE SOFT

NEW

.01

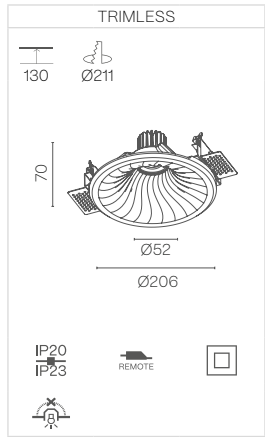


POWER STANDARD

			.01
			BPM50
40°	2700 K		250 mA 8 W 1358 – 1380 – 1445 lm
	3000 K		664EB6W152 ✖
	3000 K		664EB6W153 ✖
60°	4000 K		664EB6W155 ✖
	2700 K		664EB6W172 ✖
	3000 K		664EB6W173 ✖
	4000 K		664EB6W175 ✖

POWER HIGH

			.01
			BPM300
40°	2700 K		350 mA 12 W 1784 – 1820 – 1866 lm
	2700 K		664EB6W352 ✖
	3000 K		664EB6W353 ✖
60°	4000 K		664EB6W355 ✖
	2700 K		664EB6W372 ✖
	3000 K		664EB6W373 ✖
	4000 K		664EB6W375 ✖

Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- DIMM OPTIONS
 - On-Off
 - D · Dali
 - P · Push
 - V · 1.10v


- Down light
- LUMINAIRE INCLUDES
 - Recessed with frame mounting kit

- ON DEMAND OPTIONS
 - Wireless control options
 - Wall washer lens 15° beam angle

WAVE DOME

NEW

.01

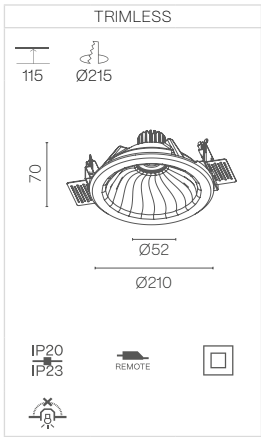


POWER STANDARD

			.01
			BPM50
40°	2700 K		250 mA 8 W 1358 – 1380 – 1445 lm
	2700 K		663EB6W152 ✖
	3000 K		663EB6W153 ✖
60°	4000 K		663EB6W155 ✖
	2700 K		663EB6W172 ✖
	3000 K		663EB6W173 ✖
	4000 K		663EB6W175 ✖

POWER HIGH

			.01
			BPM300
40°	2700 K		350 mA 12 W 1784 – 1820 – 1866 lm
	2700 K		663EB6W352 ✖
	3000 K		663EB6W353 ✖
60°	4000 K		663EB6W355 ✖
	2700 K		663EB6W372 ✖
	3000 K		663EB6W373 ✖
	4000 K		663EB6W375 ✖

Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- DIMM OPTIONS
 - On-Off
 - D · Dali
 - P · Push
 - V · 1.10v

- Down light
- LUMINAIRE INCLUDES
 - Recessed with frame mounting kit

- ON DEMAND OPTIONS
 - Wireless control options
 - Wall washer lens 15° beam angle

SAND

MEDITE
RRANEAN
Collection



CRISMOSIL

CRI
≥90

IK08

LIFE
50000H

DIM
OPTIONAL



REMOTE




220-240 V
50-60 Hz




SAND

NEW

.01

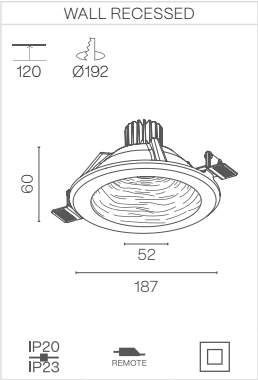

Cut-away detail



This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens
15° beam angle


SAND

POWER STANDARD

		.01	
		250 mA 8 W 1358 - 1380 - 1445 lm	
	2700 K	645EB6W152	
	3000 K	645EB6W153	
	4000 K	645EB6W155	
	2700 K	645EB6W172	
	3000 K	645EB6W173	
	4000 K	645EB6W175	

POWER HIGH

		.01	
		350 mA 12 W 1784 - 1820 - 1866 lm	
	2700 K	645EB6W352	
	3000 K	645EB6W353	
	4000 K	645EB6W355	
	2700 K	645EB6W372	
	3000 K	645EB6W373	
	4000 K	645EB6W375	

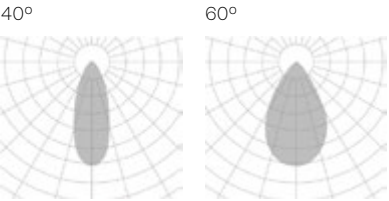

The data shown corresponds to raw values.

- DIMM OPTIONS**
- Down light
 - O** · On-Off
 - D** · Dali
 - P** · Push
 - V** · 1.10v

CRISMOSIL® SHAPED BY THE MEDITERRANEAN



MEDITERRANEAN COLLECTION
NUVOL FAMILY | 468
WAVE FAMILY | 472
SAND FAMILY | 478



NUVOL, WAVE & SAND, designed by Yonoh, explore the expressive potential of Crismosil® through reliefs inspired by sea waves, sand and clouds, elements that reflect our Mediterranean essence.

Surfaces that convey movement, lightness and continuity. Matter is shaped through organic rhythms that interact with light, creating depth, nuance and a calm, immersive sensory experience.

These new forms translate the Mediterranean landscape into architecture, strengthening the connection between design, nature and space, while adding identity and warmth to every project.

Light shaped by the landscape.

NUVOL, WAVE & SAND, diseñadas por Yonoh, exploran el potencial expresivo de Crismosil® a través de relieves inspirados en las olas del mar, la arena y las nubes, elementos que reflejan nuestra esencia mediterránea.

Superficies que evocan movimiento, ligereza y continuidad. La materia se modela con ritmos orgánicos que interactúan con la luz, generando profundidad, matices y una experiencia sensorial serena y envolvente.

Estas nuevas formas trasladan el paisaje mediterráneo a la arquitectura, reforzando el vínculo entre diseño, naturaleza y espacio, y aportando identidad y calidez a cada proyecto.

Luz modelada por el paisaje.




MENORCA FAMILY

- CRISMOSIL
- CRI ≥90
- IK06
- LIFE 50000H
- DIM OPTIONAL
- TW
- IP20
IP43
- INTEGRATED
- 220-240 V
50-60 Hz
- CE


MENORCA DEEP STRAIGHT

TRIMLESS

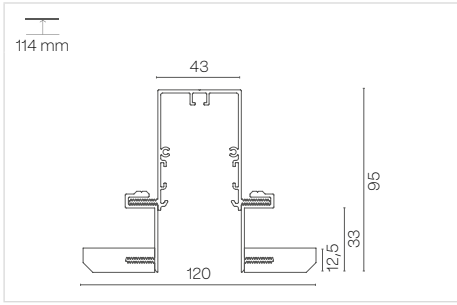


Total length = electrical system + 10mm + cover kit mm
 (Total length + 5 mm) x 125 mm

COVER KIT



FK555

JOINTS



UA16




UR03

POWER STANDARD

		843	1124	1405	1686	1967	2248
	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
	2700 K	625EH6W112	625EJ6W112	625EL6W112	625EN6W112	625EP6W112	625ER6W112
	3000 K	625EH6W113	625EJ6W113	625EL6W113	625EN6W113	625EP6W113	625ER6W113
	4000 K	625EH6W115	625EJ6W115	625EL6W115	625EN6W115	625EP6W 115	625ER6W115
	2700 K	625EH6W122	625EJ6W122	625EL6W122	625EN6W122	625EP6W122	625ER6W122
	3000 K	625EH6W123	625EJ6W123	625EL6W123	625EN6W123	625EP6W123	625ER6W123
	4000 K	625EH6W125	625EJ6W125	625EL6W125	625EN6W125	625EP6W125	625ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
	2700 K	625EH6W312	625EJ6W312	625EL6W312	625EN6W312	625EP6W312	625ER6W312
	3000 K	625EH6W313	625EJ6W313	625EL6W313	625EN6W313	625EP6W313	625ER6W313
	4000 K	625EH6W315	625EJ6W315	625EL6W315	625EN6W315	625EP6W315	625ER6W315
	2700 K	625EH6W322	625EJ6W322	625EL6W322	625EN6W322	625EP6W322	625ER6W322
	3000 K	625EH6W323	625EJ6W323	625EL6W323	625EN6W323	625EP6W323	625ER6W323
	4000 K	625EH6W325	625EJ6W325	625EL6W325	625EN6W325	625EP6W325	625ER6W325

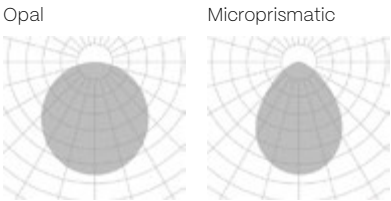

The MENORCA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.
This product must be painted by the customer.

ON DEMAND OPTIONS

- CRI 80
- Special color temperatures
- RGB
- Emergency lighting
- Motion detection
- Wireless control options


DIMM OPTIONS

- O** · On-Off
D · Dali
P · Push
V · 1.10v

Down light


MENORCA DEEP TILT

TRIMLESS

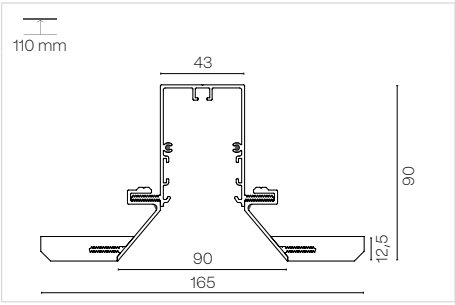


Total length = electrical system + 10mm + cover kit mm
 (Total length + 5 mm) x 170 mm

COVER KIT



CK10

JOINTS



UA08




UR03

POWER STANDARD

		843	1124	1405	1686	1967	2248
	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
	2700 K	626EH6W112	626EJ6W112	626EL6W112	626EN6W112	626EP6W112	626ER6W112
	3000 K	626EH6W113	626EJ6W113	626EL6W113	626EN6W113	626EP6W113	626ER6W113
	4000 K	626EH6W115	626EJ6W115	626EL6W115	626EN6W115	626EP6W 115	626ER6W115
	2700 K	626EH6W122	626EJ6W122	626EL6W122	626EN6W122	626EP6W122	626ER6W122
	3000 K	626EH6W123	626EJ6W123	626EL6W123	626EN6W123	626EP6W123	626ER6W123
	4000 K	626EH6W125	626EJ6W125	626EL6W125	626EN6W125	626EP6W125	626ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
	2700 K	626EH6W312	626EJ6W312	626EL6W312	626EN6W312	626EP6W312	626ER6W312
	3000 K	626EH6W313	626EJ6W313	626EL6W313	626EN6W313	626EP6W313	626ER6W313
	4000 K	626EH6W315	626EJ6W315	626EL6W315	626EN6W315	626EP6W315	626ER6W315
	2700 K	626EH6W322	626EJ6W322	626EL6W322	626EN6W322	626EP6W322	626ER6W322
	3000 K	626EH6W323	626EJ6W323	626EL6W323	626EN6W323	626EP6W323	626ER6W323
	4000 K	626EH6W325	626EJ6W325	626EL6W325	626EN6W325	626EP6W325	626ER6W325

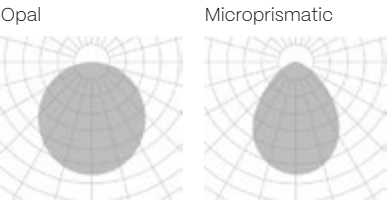

The MENORCA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.
This product must be painted by the customer.

ON DEMAND OPTIONS

- CRI 80
- Special color temperatures
- RGB
- Emergency lighting
- Motion detection
- Wireless control options


DIMM OPTIONS

- O** · On-Off
D · Dali
P · Push
V · 1.10v

Down light


MENORCA DEEP WAVE

TRIMLESS

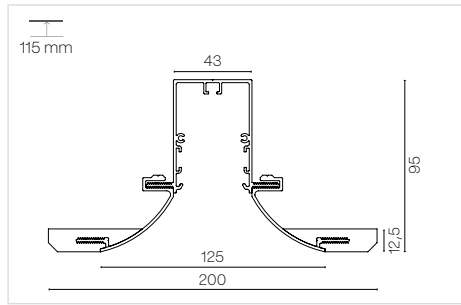


Total length = electrical system + 10mm + cover kit mm
 (Total length + 5 mm) x 205 mm

COVER KIT



CK10

JOINTS



UA06




UR03

POWER STANDARD

		843	1124	1405	1686	1967	2248
	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
	Opal	2700 K	627EH6W112	627EJ6W112	627EL6W112	627EN6W112	627EP6W112
		3000 K	627EH6W113	627EJ6W113	627EL6W113	627EN6W113	627EP6W113
		4000 K	627EH6W115	627EJ6W115	627EL6W115	627EN6W115	627EP6W 115
Microprismatic	2700 K	627EH6W122	627EJ6W122	627EL6W122	627EN6W122	627EP6W122	627ER6W122
	3000 K	627EH6W123	627EJ6W123	627EL6W123	627EN6W123	627EP6W123	627ER6W123
	4000 K	627EH6W125	627EJ6W125	627EL6W125	627EN6W125	627EP6W125	627ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
	Opal	2700 K	627EH6W312	627EJ6W312	627EL6W312	627EN6W312	627EP6W312
		3000 K	627EH6W313	627EJ6W313	627EL6W313	627EN6W313	627EP6W313
		4000 K	627EH6W315	627EJ6W315	627EL6W315	627EN6W315	627EP6W315
Microprismatic	2700 K	627EH6W322	627EJ6W322	627EL6W322	627EN6W322	627EP6W322	627ER6W322
	3000 K	627EH6W323	627EJ6W323	627EL6W323	627EN6W323	627EP6W323	627ER6W323
	4000 K	627EH6W325	627EJ6W325	627EL6W325	627EN6W325	627EP6W325	627ER6W325

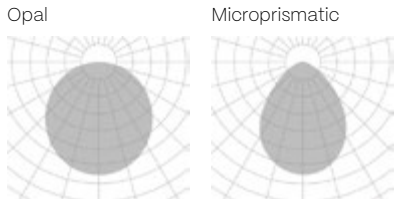

The MENORCA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.
This product must be painted by the customer.

ON DEMAND OPTIONS

- CRI 80
- Special color temperatures
- RGB
- Emergency lighting
- Motion detection
- Wireless control options


DIMM OPTIONS

- O** · On-Off
D · Dali
P · Push
V · 1.10v

Down light


MENORCA EDGE

TRIMLESS

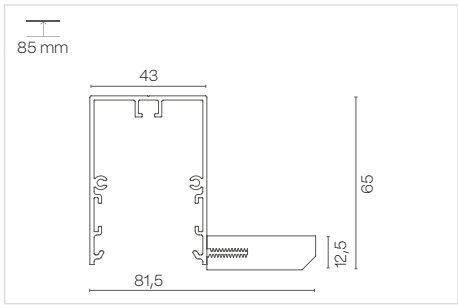


Total length = electrical system + 10mm + cover kit mm
 (Total length + 5 mm) x 87 mm

COVER KIT



FK553

JOINTS



UA10




UR03

POWER STANDARD

		843	1124	1405	1686	1967	2248
	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
	Opal	2700 K	628EH6W112	628EJ6W112	628EL6W112	628EN6W112	628EP6W112
		3000 K	628EH6W113	628EJ6W113	628EL6W113	628EN6W113	628EP6W113
		4000 K	628EH6W115	628EJ6W115	628EL6W115	628EN6W115	628EP6W 115
Microprismatic	2700 K	628EH6W122	628EJ6W122	628EL6W122	628EN6W122	628EP6W122	628ER6W122
	3000 K	628EH6W123	628EJ6W123	628EL6W123	628EN6W123	628EP6W123	628ER6W123
	4000 K	628EH6W125	628EJ6W125	628EL6W125	628EN6W125	628EP6W125	628ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
	Opal	2700 K	628EH6W312	628EJ6W312	628EL6W312	628EN6W312	628EP6W312
		3000 K	628EH6W313	628EJ6W313	628EL6W313	628EN6W313	628EP6W313
		4000 K	628EH6W315	628EJ6W315	628EL6W315	628EN6W315	628EP6W315
Microprismatic	2700 K	628EH6W322	628EJ6W322	628EL6W322	628EN6W322	628EP6W322	628ER6W322
	3000 K	628EH6W323	628EJ6W323	628EL6W323	628EN6W323	628EP6W323	628ER6W323
	4000 K	628EH6W325	628EJ6W325	628EL6W325	628EN6W325	628EP6W325	628ER6W325

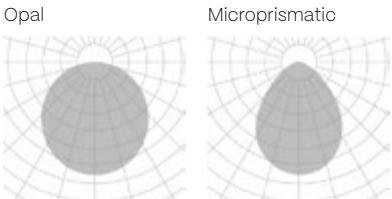

The MENORCA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.
This product must be painted by the customer.

ON DEMAND OPTIONS

- CRI 80
- Special color temperatures
- RGB
- Emergency lighting
- Motion detection
- Wireless control options


DIMM OPTIONS

- O** · On-Off
D · Dali
P · Push
V · 1.10v

Down light


MENORCA FLAT

TRIMLESS

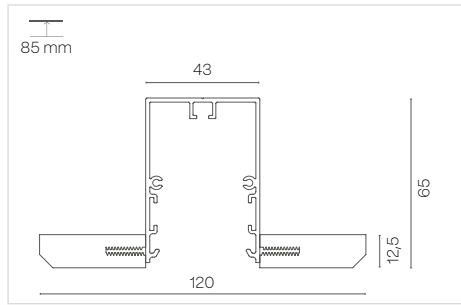


Total length = electrical system + 10mm + cover kit mm
 (Total length + 5 mm) x 125 mm

COVER KIT



JOINTS




POWER STANDARD

		843	1124	1405	1686	1967	2248
	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
Opal	2700 K	629EH6W112	629EJ6W112	629EL6W112	629EN6W112	629EP6W112	629ER6W112
	3000 K	629EH6W113	629EJ6W113	629EL6W113	629EN6W113	629EP6W113	629ER6W113
	4000 K	629EH6W115	629EJ6W115	629EL6W115	629EN6W115	629EP6W 115	629ER6W115
Microprismatic	2700 K	629EH6W122	629EJ6W122	629EL6W122	629EN6W122	629EP6W122	629ER6W122
	3000 K	629EH6W123	629EJ6W123	629EL6W123	629EN6W123	629EP6W123	629ER6W123
	4000 K	629EH6W125	629EJ6W125	629EL6W125	629EN6W125	629EP6W125	629ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
Opal	2700 K	629EH6W312	629EJ6W312	629EL6W312	629EN6W312	629EP6W312	629ER6W312
	3000 K	629EH6W313	629EJ6W313	629EL6W313	629EN6W313	629EP6W313	629ER6W313
	4000 K	629EH6W315	629EJ6W315	629EL6W315	629EN6W315	629EP6W315	629ER6W315
Microprismatic	2700 K	629EH6W322	629EJ6W322	629EL6W322	629EN6W322	629EP6W322	629ER6W322
	3000 K	629EH6W323	629EJ6W323	629EL6W323	629EN6W323	629EP6W323	629ER6W323
	4000 K	629EH6W325	629EJ6W325	629EL6W325	629EN6W325	629EP6W325	629ER6W325

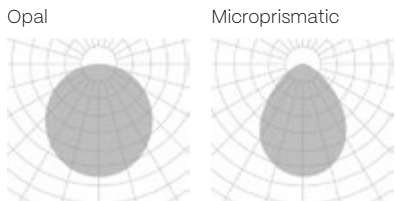

The MENORCA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.


The data shown corresponds to raw values.
This product must be painted by the customer.

- ON DEMAND OPTIONS**
 - CRI 80
 - Special color temperatures
 - RGB
 - Emergency lighting
 - Motion detection
 - Wireless control options

- DIMM OPTIONS**
 - On-Off
 - Dali
 - Push
 - 1.10v
- Down light


MENORCA WASHER

TRIMLESS

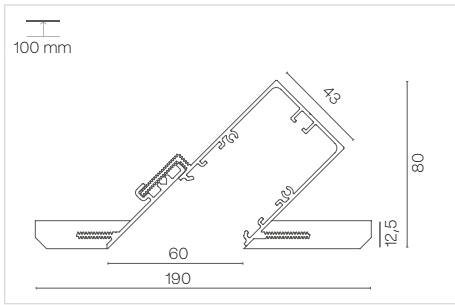

Total length = electrical system + 10mm + cover kit mm
 (Total length + 5 mm) x 195 mm

COVER KIT



JOINTS




POWER STANDARD

		843	1124	1405	1686	1967	2248
	500 mA	17 W 2454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm	33 W 4908 - 5814 - 6258 lm	39 W 5726 - 6783 - 7301 lm	45 W 6544 - 7752 - 8344 lm
Opal	2700 K	630EH6W112	630EJ6W112	630EL6W112	630EN6W112	630EP6W112	630ER6W112
	3000 K	630EH6W113	630EJ6W113	630EL6W113	630EN6W113	630EP6W113	630ER6W113
	4000 K	630EH6W115	630EJ6W115	630EL6W115	630EN6W115	630EP6W 115	630ER6W115
Microprismatic	2700 K	630EH6W122	630EJ6W122	630EL6W122	630EN6W122	630EP6W122	630ER6W122
	3000 K	630EH6W123	630EJ6W123	630EL6W123	630EN6W123	630EP6W123	630ER6W123
	4000 K	630EH6W125	630EJ6W125	630EL6W125	630EN6W125	630EP6W125	630ER6W125

POWER HIGH

		843	1124	1405	1686	1967	2248
	500 mA	33 W 4908 - 5814 - 6258 lm	45 W 6544 - 7752 - 8344 lm	56 W 8180 - 9690 - 10430 lm	67 W 9816 - 11628 - 12516 lm	78 W 11452 - 13566 - 14602 lm	89 W 13088 - 15504 - 16688 lm
Opal	2700 K	630EH6W312	630EJ6W312	630EL6W312	630EN6W312	630EP6W312	630ER6W312
	3000 K	630EH6W313	630EJ6W313	630EL6W313	630EN6W313	630EP6W313	630ER6W313
	4000 K	630EH6W315	630EJ6W315	630EL6W315	630EN6W315	630EP6W315	630ER6W315
Microprismatic	2700 K	630EH6W322	630EJ6W322	630EL6W322	630EN6W322	630EP6W322	630ER6W322
	3000 K	630EH6W323	630EJ6W323	630EL6W323	630EN6W323	630EP6W323	630ER6W323
	4000 K	630EH6W325	630EJ6W325	630EL6W325	630EN6W325	630EP6W325	630ER6W325

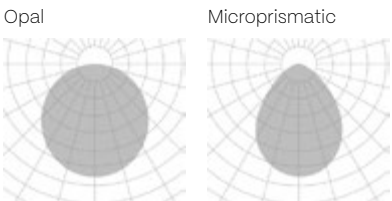

The MENORCA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

The data shown corresponds to raw values.
This product must be painted by the customer.

- ON DEMAND OPTIONS**
 - CRI 80
 - Special color temperatures
 - RGB
 - Emergency lighting
 - Motion detection
 - Wireless control options

- DIMM OPTIONS**
 - On-Off
 - Dali
 - Push
 - 1.10v
- Down light




ALBA PRO CRISMOSIL

SOON

- CRISMOSIL
- CRI ≥90
- IK06
- LIFE 50000H
- DIM OPTIONAL
- TW
- ⚡
- ⌚
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE
- ⚡


LIGHT MODULES

SOON

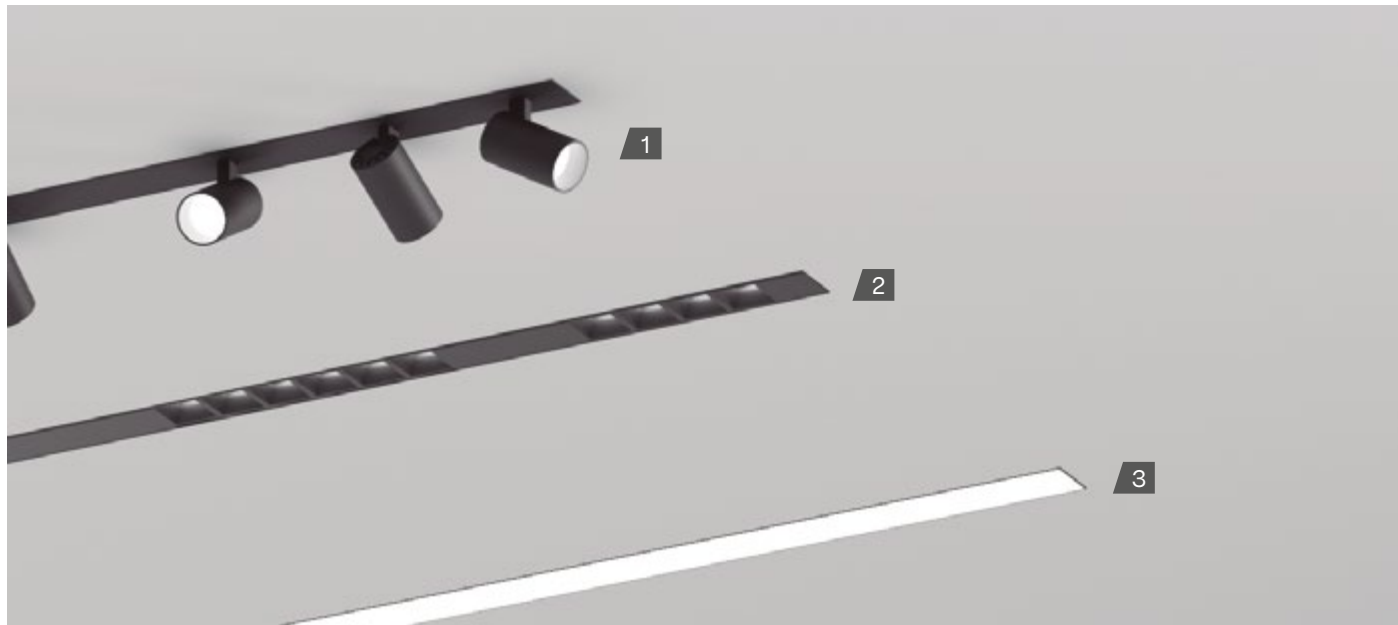

1. SPOTLIGHT

IP40			
		POWER STANDARD	POWER HIGH
	700 mA	6 W 878 – 889 – 930 lm	6 W 886 – 898 – 939 lm
15°	2700 K	260EX9 122X	260EX9 322X
	3000 K	260EX9 123X	260EX9 323X
	4000 K	260EX9 125X	260EX9 325X
24°	2700 K	260EX9 132X	260EX9 332X
	3000 K	260EX9 133X	260EX9 333X
	4000 K	260EX9 135X	260EX9 335X
38°	2700 K	260EX9 152X	260EX9 352X
	3000 K	260EX9 153X	260EX9 353X
	4000 K	260EX9 155X	260EX9 355X

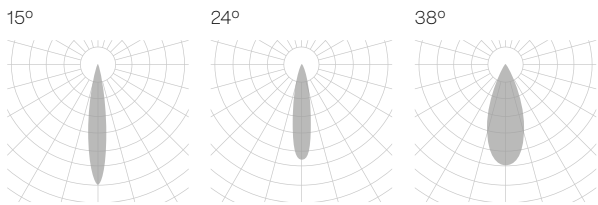

The data shown corresponds to raw values.

- Down light
- FINISH

B · Black

W · White


LIGHT MODULES – Configurable custom luminaire

2. MODULE LENSES – POWER STANDARD

IP40			
		29 mm	80 mm
	350 mA	4 W 575 – 600 – 625 lm	7 W 1000 – 1050 – 1055 lm
65°	2700 K	257EX9 172X	258EX9 172X
	3000 K	257EX9 173X	258EX9 173X
	4000 K	257EX9 175X	258EX9 175X
90°	2700 K	257EX9 172X	258EX9 172X
	3000 K	257EX9 173X	258EX9 173X
	4000 K	257EX9 175X	258EX9 175X
Asymetric	2700 K	257EX9 142X	258EX9 142X
	3000 K	257EX9 143X	258EX9 143X
	4000 K	257EX9 155X	258EX9 155X

3. MODULE LIGHT – POWER STANDARD

IP40			
		Opal	Microprismatic
		280 mm	280 mm
	700 mA	8 W 1178 – 1388 – 1493 lm	8 W 1178 – 1388 – 1493 lm
Power standard	2700 K	259EX9W112X	259EX9W122X
	3000 K	259EX9W113X	259EX9W123X
	4000 K	259EX9W115X	259EX9W125X

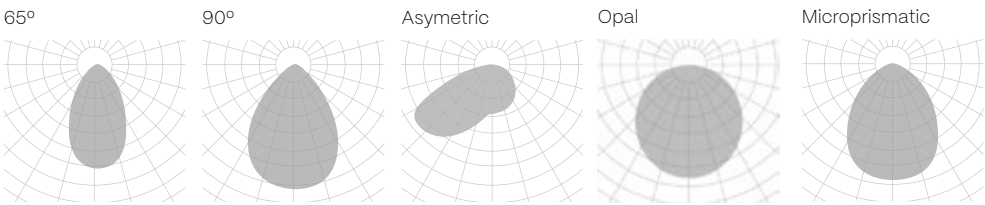

The data shown corresponds to raw values.

- Down light
- FINISH

B · Black

W · White

S · Special color
- DIMM OPTIONS

O · On-Off

D · Dali

P · Push

V · 1.10v

2. MODULE LENSES – POWER HIGH


IP40			
		29 mm	80 mm
	700 mA	8 W 1115 – 1165 – 1220 lm	14 W 1950 – 2040 – 2050 lm
65°	2700 K	257EX9 372X	258EX9 372X
	3000 K	257EX9 373X	258EX9 373X
	4000 K	257EX9 375X	258EX9 375X
90°	2700 K	257EX9 372X	258EX9 372X
	3000 K	257EX9 373X	258EX9 373X
	4000 K	257EX9 375X	258EX9 375X
Asymetric	2700 K	257EX9 342X	258EX9 342X
	3000 K	257EX9 343X	258EX9 343X
	4000 K	257EX9 355X	258EX9 355X

3. MODULE LIGHT – POWER HIGH

IP40			
		Opal	Microprismatic
		280 mm	280 mm
	700 mA	16 W 2213 – 2664 – 2866 lm	16 W 2213 – 2664 – 2866 lm
Power high	2700 K	259EX9W312X	259EX9W322X
	3000 K	259EX9W313X	259EX9W323X
	4000 K	259EX9W315X	259EX9W325X

PROFILES for modules

TRIMLESS

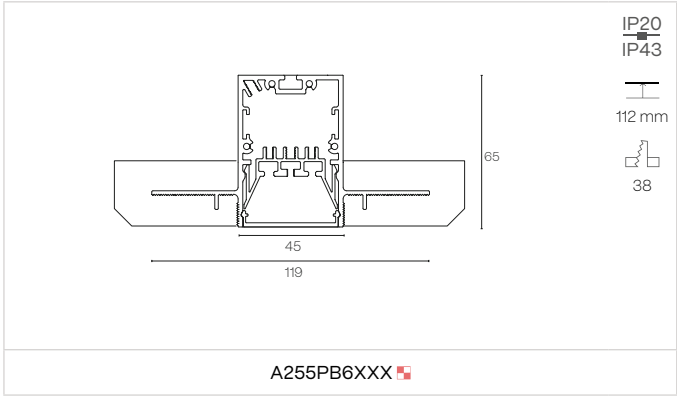

Total length = Electrical system length + 2 x 10 mm (Ends) + 2 x 2 mm (Cover Kit)
(Total length + 2 mm) x 65 mm

GENERAL COMPONENTS

COVER KIT	OPAQUE
Trimless	
A255CB6XXX	A255PBXXXX

ALBA DRIVER FOR CUSTOM PRODUCT - POWER STANDARD			
Electric system Length 281 mm	1 MODULE	4 W	DR10163.01.ST.
Electric system Length 562 mm	2 - 4 MODULES	8 to 16 W	DR10163.02.ST.
Electric system Length 843 mm	5 - 9 MODULES	20 to 36 W	DR10163.03.ST.
Electric system Length 1124 mm	10 - 17 MODULES	40 to 68 W	DR10163.04.ST.
Electric system Length 1405 mm	18 - 19 MODULES	72 to 76 W	DR10163.05.ST.

ALBA DRIVER FOR CUSTOM PRODUCT - POWER HIGH			
Electric system Length 281 mm	1 MODULE	8 W	DR10163.01.HI.
Electric system Length 562 mm	2 - 4 MODULES	16 W	DR10163.02.HI.
Electric system Length 843 mm	5 - 9 MODULES	24 to 32 W	DR10163.03.HI.
Electric system Length 1124 mm	10 - 17 MODULES	40 to 64 W	DR10163.04.HI.
Electric system Length 1405 mm	18 - 19 MODULES	72 to 88 W	DR10163.05.HI.

This product must be painted by the customer.

ON DEMAND OPTIONS

Special color temperatures

Custom dimensions

CRI 80

Emergency lighting

Motion detection

Wireless control options

RGB

FINISH

B · Black

W · White

S · Special color

DIMM OPTIONS

O · On-Off

D · Dali

P · Push

V · 1.10v

CLOSED LUMINAIRE

POWER STANDARD – Closed luminaire

		843	1124	1405
	24 V	4 W 387 - 405 - 425 lm	6 W 622 - 634 - 666 lm	8 W 824 - 840 - 882 lm
	500 mA	17 W 1454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm
Opal	2700 K	255EH6 112	255EJ6 112	255EL6 112
	3000 K	255EH6 113	255EJ6 113	255EL6 113
	4000 K	255EH6 115	255EJ6 115	255EL6 115
Microprismatic	2700 K	255EH6 122	255EJ6 122	255EL6 122
	3000 K	255EH6 123	255EJ6 123	255EL6 123
	4000 K	255EH6 125	255EJ6 125	255EL6 125


The ALBA family is available in multiple sizes.
This page shows a selection of them.
For other sizes and technical specifications, see page 194.

POWER HIGH – Closed luminaire

		843	1124	1405
	24 V	4 W 387 - 405 - 425 lm	6 W 622 - 634 - 666 lm	8 W 824 - 840 - 882 lm
	500 mA	17 W 1454 - 2907 - 3129 lm	22 W 3272 - 3876 - 4172 lm	28 W 4090 - 4845 - 5215 lm
Opal	2700 K	255EH6 312	255EJ6 312	255EL6 312
	3000 K	255EH6 313	255EJ6 313	255EL6 313
	4000 K	255EH6 315	255EJ6 315	255EL6 315
Microprismatic	2700 K	255EH6 322	255EJ6 322	255EL6 322
	3000 K	255EH6 323	255EJ6 323	255EL6 323
	4000 K	255EH6 325	255EJ6 325	255EL6 325


Closed luminaire with 4 opaques and 3 lens modules

		POWER STANDARD	POWER HIGH
		1098 mm (TR)	
		350 mA · 12 W 1725 - 1800 - 1875 lm	700 mA · 24 W 3345 - 3495 - 3660 lm
	65°	256EX6 172	256EX6 372
65°	2700 K	256EX6 172	256EX6 372
	3000 K	256EX6 173	256EX6 373
	4000 K	256EX6 175	256EX6 375

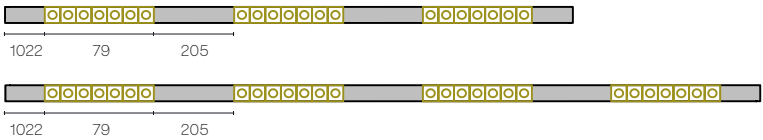

Closed luminaire with 5 opaques and 4 lens modules

		POWER STANDARD	POWER HIGH
		1463 mm (TR)	
		350 mA · 16 W 2300 - 2400 - 2500 lm	700 mA · 32 W 4460 - 4660 - 4880 lm
	65°	256EY6 172	256EY6 372
65°	2700 K	256EY6 172	256EY6 372
	3000 K	256EY6 173	256EY6 373
	4000 K	256EY6 175	256EY6 375

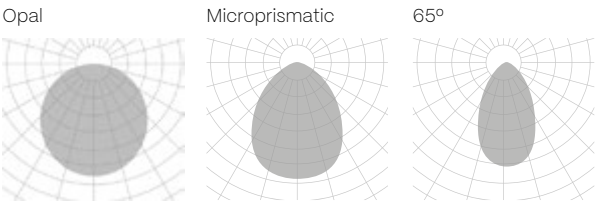

The data shown corresponds to raw values.

FINISH

B · Black

W · White

S · Special color

DIMM OPTIONS

O · On-Off

D · Dali

P · Push

V · 1.10v



ZENIT FAMILY



CRISMOSIL

CRI
≥90




220-240 V
50-60 Hz



ZENIT

.00

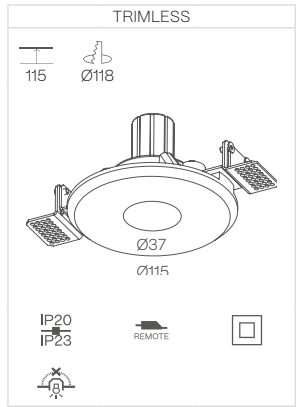

NEW


POWER STANDARD

		.00	.01
		350 mA 3 W 489 - 496 - 518 lm	250 mA 8 W 1358 - 1380 - 1445 lm
24°	2700 K	670EA6W132 ✖	-
	3000 K	670EA6W133 ✖	-
	4000 K	670EA6W135 ✖	-
40°	2700 K	670EA6W152 ✖	670EB6W152 ✖
	3000 K	670EA6W153 ✖	670EB6W153 ✖
	4000 K	670EA6W155 ✖	670EB6W155 ✖
60°	2700 K	670EA6W172 ✖	670EB6W172 ✖
	3000 K	670EA6W173 ✖	670EB6W173 ✖
	4000 K	670EA6W175 ✖	670EB6W175 ✖

POWER GU5.3

		.01
		Max. 8 W LED
-		670EB6W4XXX

Cut-away detail




The data shown corresponds to raw values.
This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ✖ **DIMM OPTIONS**
- · On-Off
- D · Dali
- P · Push
- V · 1.10v

.01

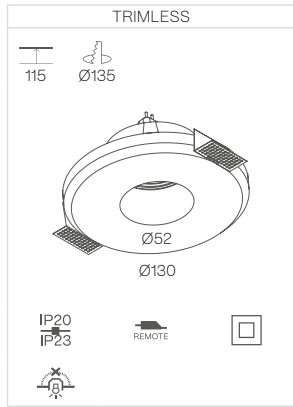


POWER HIGH

		.01
		350 mA 12 W 1784 - 1820 - 1866 lm
40°	2700 K	670EB6W352 ✖
	3000 K	670EB6W353 ✖
	4000 K	670EB6W355 ✖
60°	2700 K	670EB6W372 ✖
	3000 K	670EB6W373 ✖
	4000 K	670EB6W375 ✖

POWER GU10

		.01
		Max. 8 W LED
.GU		670EB6W5XXX

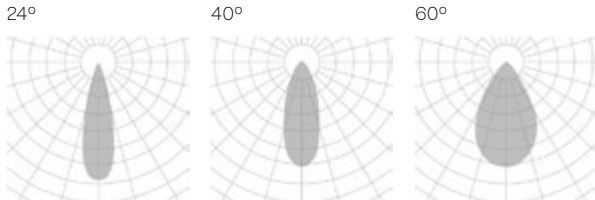


- Down light
- LUMINAIRE INCLUDES**
- Recessed with frame mounting kit
- CEILING THICKNESS**
- 7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens
- 15° beam angle

ZENIT RING

NEW


.01

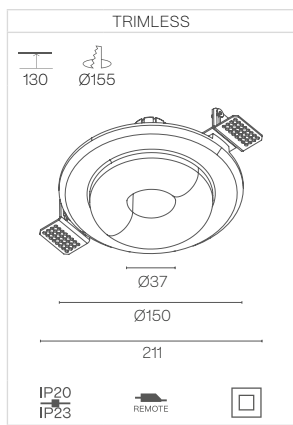

POWER STANDARD

		.00
		350 mA 3 W 489 - 496 - 518 lm
24°	2700 K	600EA6W132 ✖
	3000 K	600EA6W133 ✖
	4000 K	600EA6W135 ✖
40°	2700 K	600EA6W152 ✖
	3000 K	600EA6W153 ✖
	4000 K	600EA6W155 ✖
60°	2700 K	600EA6W172 ✖
	3000 K	600EA6W173 ✖
	4000 K	600EA6W175 ✖


Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- ✖ **DIMM OPTIONS**
- · On-Off
- D · Dali
- P · Push
- V · 1.10v

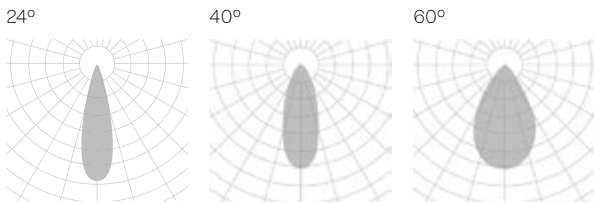


- Down light
- LUMINAIRE INCLUDES**
- Recessed with frame mounting kit
- CEILING THICKNESS**
- 7-22 mm


- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens
- 15° beam angle

ZENIT DEEP


.00

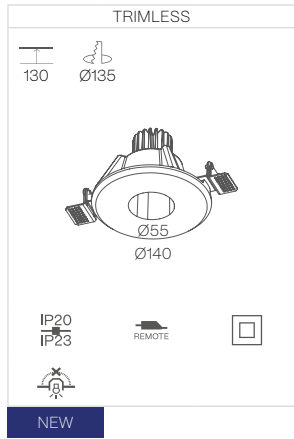

.01

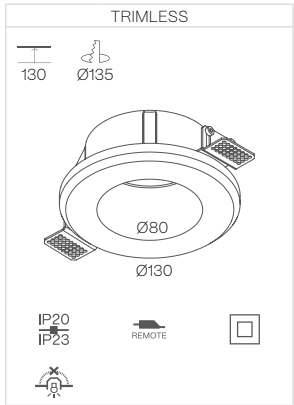

Cut-away detail 00 & 01

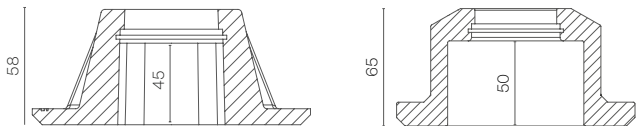

This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v

- Down light
- LUMINAIRE INCLUDES**
- Recessed with frame mounting kit
- CEILING THICKNESS**
- 7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
- Wall washer lens
- 15° beam angle


ZENIT DEEP

POWER STANDARD

		.00	.01
	40°	250 mA 8 W 1358 – 1380 – 1445 lm	250 mA 8 W 1358 – 1380 – 1445 lm
		2700 K 671EA6W152	2700 K 671EB6W152
		3000 K 671EA6W153	3000 K 671EB6W153
	60°	4000 K 671EA6W155	4000 K 671EB6W155
		2700 K 671EA6W172	2700 K 671EB6W172
		3000 K 671EA6W173	3000 K 671EB6W173
	60°	4000 K 671EA6W175	4000 K 671EB6W175

POWER GU5.3

		.01
		Max. 8 W LED
-		671EB6W4XXX

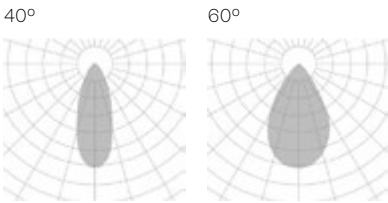

The data shown corresponds to raw values.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- DIMM OPTIONS**
- O** · On-Off
- D** · Dali
- P** · Push
- V** · 1.10v


POWER GU10

		.01
		Max. 8 W LED
.GU		671EB6W5XXX

- Down light
- LUMINAIRE INCLUDES**
- Recessed with frame mounting kit
- CEILING THICKNESS**
- 7-22 mm

ZENIT DEEP TWINS

.01

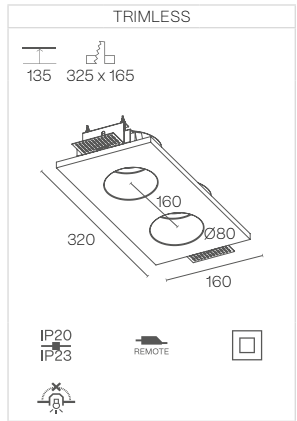

POWER STANDARD

.01		
		
250 mA 32 W 2716 – 2760 – 2890 lm		
40°	2700 K	673EB6W152 ✖
	3000 K	673EB6W153 ✖
	4000 K	673EB6W155 ✖
60°	2700 K	673EB6W172 ✖
	3000 K	673EB6W173 ✖
	4000 K	673EB6W175 ✖

POWER HIGH

.01		
		
350 mA 48 W 3568 – 3640 – 3732 lm		
40°	2700 K	673EB6W352 ✖
	3000 K	673EB6W353 ✖
	4000 K	673EB6W355 ✖
60°	2700 K	673EB6W372 ✖
	3000 K	673EB6W373 ✖
	4000 K	673EB6W375 ✖


POWER GU5.3

.01		
		
Max. 2 × 8 W LED		
-		673EB6W4XXX

POWER GU10

.01		
		
Max. 2 × 8 W LED		
.GU		673EB6W5XXX

Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material


- ✖ **DIMM OPTIONS**
- O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v

-  Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
-  **CEILING THICKNESS**
7-22 mm

-  **ON DEMAND OPTIONS**
-  Wireless control options
 -  Wall washer lens
15° beam angle

ZENIT MOVE

.01

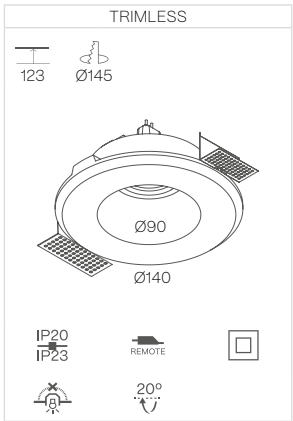


POWER STANDARD

.01		
		
250 mA 8 W 1358 – 1380 – 1445 lm		
40°	2700 K	674EB6W152 ✖
	3000 K	674EB6W153 ✖
	4000 K	674EB6W155 ✖
60°	2700 K	674EB6W172 ✖
	3000 K	674EB6W173 ✖
	4000 K	674EB6W175 ✖

POWER GU5.3

.01		
		
Max. 8 W LED		
-		674EB6W4XXX

Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material


- ✖ **DIMM OPTIONS**
- O · On-Off
 - D · Dali
 - P · Push
 - V · 1.10v

-  Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
-  **CEILING THICKNESS**
7-22 mm

-  **ON DEMAND OPTIONS**
-  Wireless control options
 -  Wall washer lens
15° beam angle

ZENIT MOVE SQ

.01

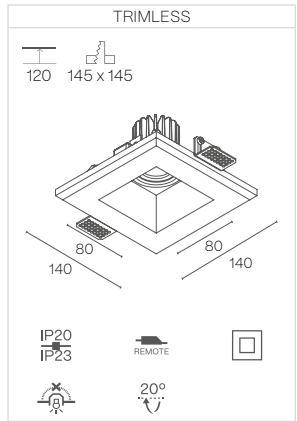


POWER STANDARD

.01		
BPM50		
250 mA 8 W 1358 – 1380 – 1445 lm		
40°	2700 K	675EB6W152
	3000 K	675EB6W153
	4000 K	675EB6W155
60°	2700 K	675EB6W172
	3000 K	675EB6W173
	4000 K	675EB6W175

POWER GU5.3

.01		
GU5.3		
Max. 8 W LED		
-		675EB6W4XXX

Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material


- DIMM OPTIONS**
- On-Off
 - D · Dali
 - P · Push
 - V · 1.10v

- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

ZENIT ORTO

.01

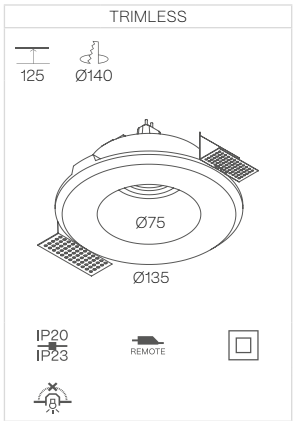


POWER STANDARD

.01		
BPM50		
250 mA 8 W 1358 – 1380 – 1445 lm		
40°	2700 K	676EB6W152
	3000 K	676EB6W153
	4000 K	676EB6W155
60°	2700 K	676EB6W172
	3000 K	676EB6W173
	4000 K	676EB6W175

POWER GU5.3

.01		
GU5.3		
Max. 8 W LED		
-		676EB6W4XXX

Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

- DIMM OPTIONS**
- On-Off
 - D · Dali
 - P · Push
 - V · 1.10v


- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
- CEILING THICKNESS**
7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle




ZENIT SIDEREA


.00

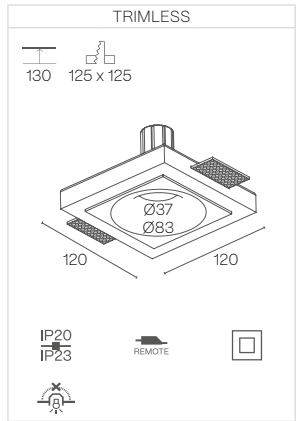

.01

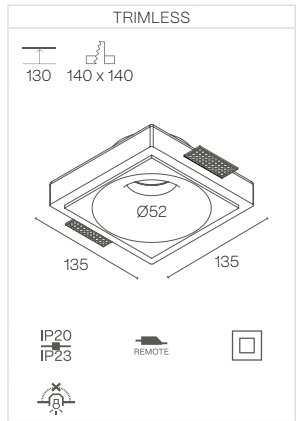

Cut-away detail



This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

CEILING THICKNESS
7-22 mm

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

ZENIT SIDEREA

POWER STANDARD

		.00	.01
		BPM30	BPM50
	24°	350 mA 3 W 489 – 496 – 518 lm	250 mA 8 W 1358 – 1380 – 1445 lm
		2700 K 677EA6W132	–
		3000 K 677EA6W133	–
	40°	4000 K 677EA6W135	–
		2700 K 677EA6W152	677EB6W152
		3000 K 677EA6W153	677EB6W153
	60°	4000 K 677EA6W155	677EB6W155
		2700 K 677EA6W172	677EB6W172
		3000 K 677EA6W173	677EB6W173
	60°	4000 K 677EA6W175	677EB6W175

POWER HIGH


		.01
		BPM300
	40°	350 mA 12 W 1784 – 1820 – 1866 lm
		2700 K 677EB6W352
		3000 K 677EB6W353
	60°	4000 K 677EB6W355
		2700 K 677EB6W372
		3000 K 677EB6W373
	60°	4000 K 677EB6W375

POWER GU5.3

		.01
		GU5.3
	–	Max. 8 W LED
		677EB6W4XXX

POWER GU10

		.01
		GU10
	.GU	Max. 8 W LED
		677EB6W5XXX

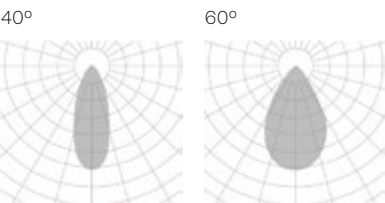


The data shown corresponds to raw values.

- DIMM OPTIONS**
- On-Off
 - Dali
 - Push
 - 1.10v
- Down light


ZENIT SIDEREA ASYMETRIC

.01

.02

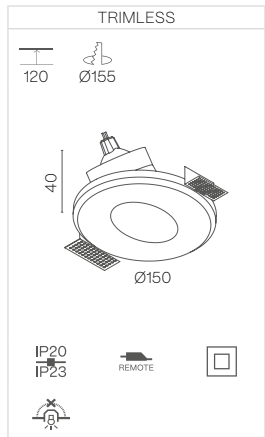


CEILING THICKNESS
7-22 mm

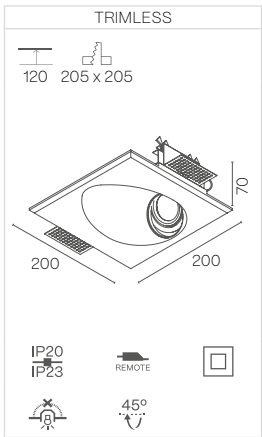


CEILING THICKNESS
10-20 mm

.03

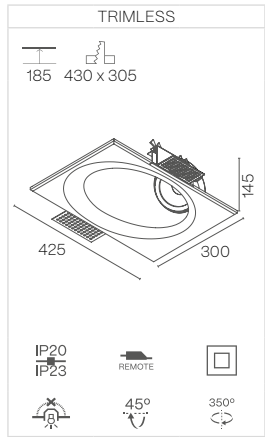

CEILING THICKNESS
10-20 mm

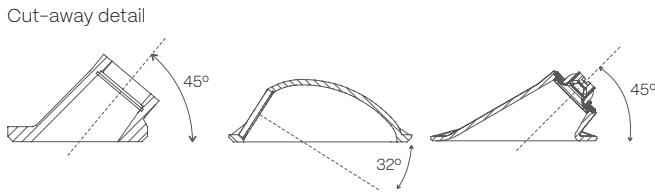

This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS
- Wireless control options
- Wall washer lens 15° beam angle

ZENIT SIDEREA ASYMETRIC

POWER STANDARD

		.01	.02	.03
		BPM50	BPM50	BPM3181
		250 mA 8 W 1358 - 1380 - 1445 lm	250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm
40°	2700 K	650EB6W152	650EE6W152	650EH6W152
	3000 K	650EB6W153	650EE6W153	650EH6W153
	4000 K	650EB6W155	650EE6W155	650EH6W155
60°	2700 K	650EB6W172	650EE6W172	650EH6W172
	3000 K	650EB6W173	650EE6W173	650EH6W173
	4000 K	650EB6W175	650EE6W175	650EH6W175

POWER GU5.3

		.01	.02
		GU5 3	GU5 3
		Max. 8 W LED	Max. 8 W LED
-		650EB6W4XXX	650EE6W4XXX

POWER GU10


		.01	.02
		GU10	GU10
		Max. 8 W LED	Max. 8 W LED
.GU		650EB6W5XXX	650EE6W5XXX

The data shown corresponds to raw values.

- DIMM OPTIONS
 - On-Off
 - Dali
 - Push
 - 1.10v
- Down light

ZENIT SQ

.01

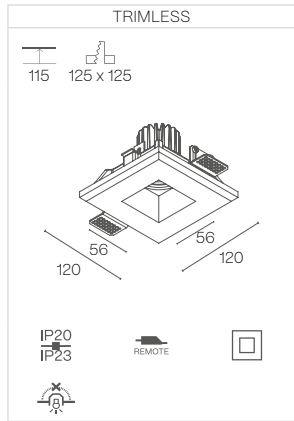

POWER STANDARD

.01		
 BPM50		
250 mA 8 W 1358 – 1380 – 1445 lm		
40°	2700 K	678EB6W152 ✖
	3000 K	678EB6W153 ✖
	4000 K	678EB6W155 ✖
60°	2700 K	678EB6W172 ✖
	3000 K	678EB6W173 ✖
	4000 K	678EB6W175 ✖

POWER HIGH

.01		
 BPM300		
350 mA 12 W 1784 – 1820 – 1866 lm		
40°	2700 K	678EB6W352 ✖
	3000 K	678EB6W353 ✖
	4000 K	678EB6W355 ✖
60°	2700 K	678EB6W372 ✖
	3000 K	678EB6W373 ✖
	4000 K	678EB6W375 ✖


POWER GU5.3

.01	
 GU5.3	
	Max. 8 W LED
-	678EB6W4XXX

POWER GU10

.01	
 GU10	
	Max. 8 W LED
.GU	678EB6W5XXX

Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material

-  **DIMM OPTIONS**
- · On-Off

D · Dali

P · Push

V · 1.10v

-  Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
-  **CEILING THICKNESS**
7-22 mm


-  **ON DEMAND OPTIONS**
-  Wireless control options

 Wall washer lens
15° beam angle

ZENIT STONE

NEW


.00

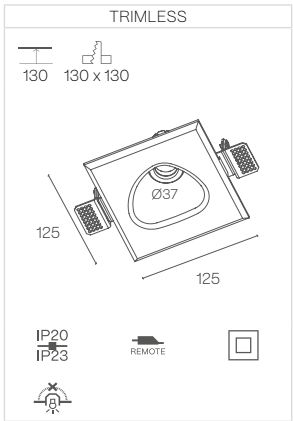

POWER STANDARD

		.00	.01
		 BPM30	 BPM50
		350 mA 3 W 489 – 496 – 518 lm	250 mA 8 W 1358 – 1380 – 1445 lm
24°	2700 K	679EA6W132 ✖	-
	3000 K	679EA6W133 ✖	-
	4000 K	679EA6W135 ✖	-
40°	2700 K	679EA6W152 ✖	679EB6W152 ✖
	3000 K	679EA6W153 ✖	679EB6W153 ✖
	4000 K	679EA6W155 ✖	679EB6W155 ✖
60°	2700 K	679EA6W172 ✖	679EB6W172 ✖
	3000 K	679EA6W173 ✖	679EB6W173 ✖
	4000 K	679EA6W175 ✖	679EB6W175 ✖

.01

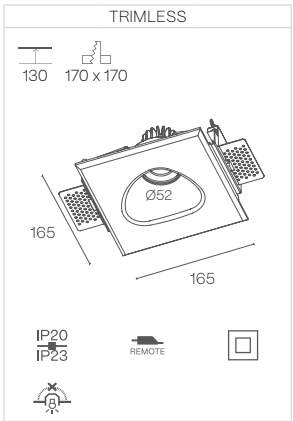


POWER HIGH

.01		
 BPM300		
350 mA 12 W 1784 – 1820 – 1866 lm		
40°	2700 K	679EB6W352 ✖
	3000 K	679EB6W353 ✖
	4000 K	679EB6W355 ✖
60°	2700 K	679EB6W372 ✖
	3000 K	679EB6W373 ✖
	4000 K	679EB6W375 ✖

POWER GU5.3

.01	
 GU5.3	
	Max. 8 W LED
-	679EB6W4XXX

Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material

-  **DIMM OPTIONS**
- · On-Off

D · Dali

P · Push

V · 1.10v


-  Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
-  **CEILING THICKNESS**
7-22 mm

-  **ON DEMAND OPTIONS**
-  Wireless control options

 Wall washer lens
15° beam angle

ZENIT ZUBIA

.01

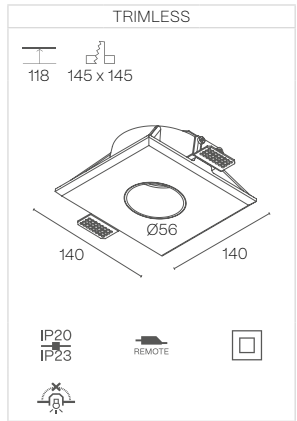

POWER STANDARD


			.01
			
			250 mA 8 W 1358 – 1380 – 1445 lm
	2700 K		680EB6W152 ✖
	3000 K		680EB6W153 ✖
	4000 K		680EB6W155 ✖
	2700 K		680EB6W172 ✖
	3000 K		680EB6W173 ✖
	4000 K		680EB6W175 ✖

POWER HIGH

			.01
			
			350 mA 12 W 1784 – 1820 – 1866 lm
	2700 K		680EB6W352 ✖
	3000 K		680EB6W353 ✖
	4000 K		680EB6W355 ✖
	2700 K		680EB6W372 ✖
	3000 K		680EB6W373 ✖
	4000 K		680EB6W375 ✖

POWER GU5.3

			.01
			
			Max. 8 W LED
-			680EB6W4XXX



It can be mounted in any position from recessed up to 35mm protruding.

The data shown corresponds to raw values.
This product must be painted by the customer.

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material


-  **DIMM OPTIONS**
-  On-Off
-  Dali
-  Push
-  1.10v

-  Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
-  **CEILING THICKNESS**
7-22 mm

-  **ON DEMAND OPTIONS**
-  Wireless control options
-  Wall washer lens
15° beam angle

ZENIT ZUBIA SQ

.01

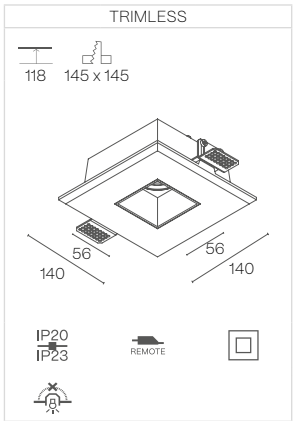

POWER STANDARD


			.01
			
			250 mA 8 W 1358 – 1380 – 1445 lm
	2700 K		681EB6W152 ✖
	3000 K		681EB6W153 ✖
	4000 K		681EB6W155 ✖
	2700 K		681EB6W172 ✖
	3000 K		681EB6W173 ✖
	4000 K		681EB6W175 ✖

POWER HIGH

			.01
			
			350 mA 12 W 1784 – 1820 – 1866 lm
	2700 K		681EB6W352 ✖
	3000 K		681EB6W353 ✖
	4000 K		681EB6W355 ✖
	2700 K		681EB6W372 ✖
	3000 K		681EB6W373 ✖
	4000 K		681EB6W375 ✖

POWER GU5.3

			.01
			
			Max. 8 W LED
-			680EB6W4XXX



It can be mounted in any position from recessed up to 35mm protruding.

The data shown corresponds to raw values.
This product must be painted by the customer.

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material

-  **DIMM OPTIONS**
-  On-Off
-  Dali
-  Push
-  1.10v

-  Down light
- LUMINAIRE INCLUDES**
Recessed with frame mounting kit
-  **CEILING THICKNESS**
7-22 mm

-  **ON DEMAND OPTIONS**
-  Wireless control options
-  Wall washer lens
15° beam angle



VEGA FAMILY



CRISMOSIL

CRI
≥90

IK08

LIFE
50000h

DIM
OPTIONAL



REMOTE




220-240 V
50-60 Hz




VEGA

.01

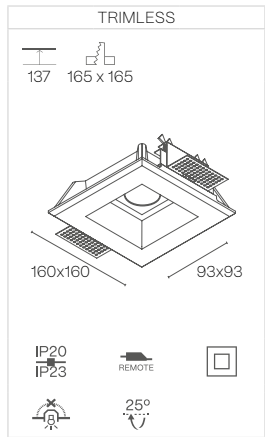


.02

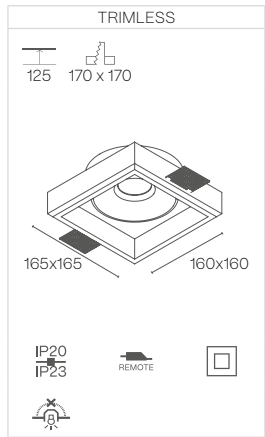

CEILING THICKNESS
10-20 mm

CEILING THICKNESS
13 mm

Cut-away detail



This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS
- Wireless control options
- Wall washer lens 15° beam angle

VEGA

POWER STANDARD

		.01	.02
		BPM50	BPM3181
		250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm
40°	2700 K	654EB6W152	654EE6W152
	3000 K	654EB6W153	654EE6W153
	4000 K	654EB6W155	654EE6W155
60°	2700 K	654EB6W172	654EE6W172
	3000 K	654EB6W173	654EE6W173
	4000 K	654EB6W175	654EE6W175

POWER HIGH

		.01
		BPM300
		350 mA 12 W 1784 - 1820 - 1866 lm
40°	2700 K	654EB6W352
	3000 K	654EB6W353
	4000 K	654EB6W355
60°	2700 K	654EB6W372
	3000 K	654EB6W373
	4000 K	654EB6W375

POWER GU5.3


		.01	.02
		GU5.3	GU5.3
		Max. 8 W LED	Max. 8 W LED
		654EB6W4XXX	654EE6W4XXX

POWER GU10

		.01	.02
		GU10	GU10
		Max. 8 W LED	Max. 8 W LED
		.GU 654EB6WXXX	.GU 654EE6W5XXX

POWER GX8.5

		.02
		GX8.5
		Max. 20 W LED
		.CD 654EE6W6XXX

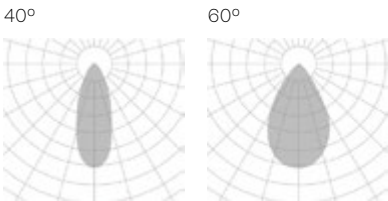


The data shown corresponds to raw values.

- DIMM OPTIONS
- On-Off
- D · Dali
- P · Push
- V · 1.10v
- Down light


VEGA ADHARA

.01

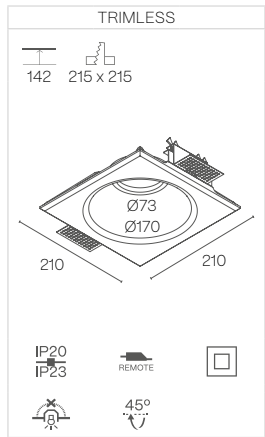


CEILING THICKNESS
10-20 mm

.02

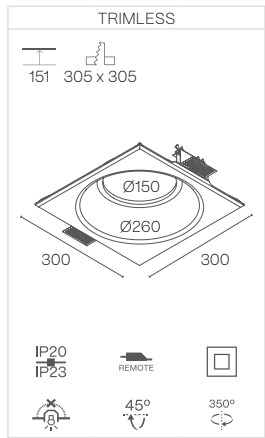

CEILING THICKNESS
13 mm

Cut-away detail



This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

ON DEMAND OPTIONS

- Wireless control options
- Wall washer lens 15° beam angle

VEGA ADHARA

POWER STANDARD

		.01	.02
		BPM50	BPM3181
		250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm
40°	2700 K	655EB6W152	655EE6W152
	3000 K	655EB6W153	655EE6W153
	4000 K	655EB6W155	655EE6W155
60°	2700 K	655EB6W172	655EE6W172
	3000 K	655EB6W173	655EE6W173
	4000 K	655EB6W175	655EE6W175

POWER HIGH

		.01
		BPM300
		350 mA 12 W 1784 - 1820 - 1866 lm
40°	2700 K	655EB6W352
	3000 K	655EB6W353
	4000 K	655EB6W355
60°	2700 K	655EB6W372
	3000 K	655EB6W373
	4000 K	655EB6W375

POWER GU5.3


		.01	.02
		GU5.3	GU5.3
		Max. 8 W LED	Max. 8 W LED
		655EB6W4XXX	655EE6W4XXX

POWER GU10

		.01	.02
		GU10	GU10
		Max. 8 W LED	Max. 8 W LED
		655EB6W5XXX	655EE6W5XXX

POWER GX8.5

		.02
		GX8.5
		Max. 20 W LED
		655EE6W6XXX

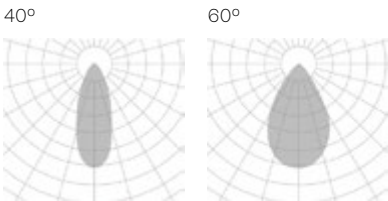

The data shown corresponds to raw values.


DIMM OPTIONS

- On-Off
- D · Dali
- P · Push
- V · 1.10v


Down light

VEGA TWINS

.01

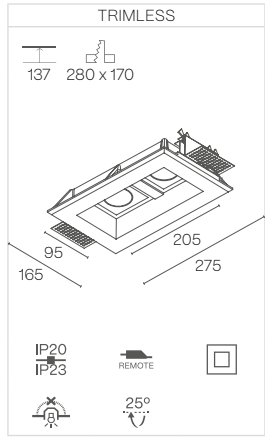

.02

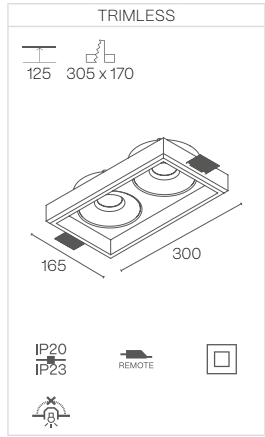

CEILING THICKNESS
10-20 mm

CEILING THICKNESS
13 mm

Cut-away detail



This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS
- Wireless control options
 - Wall washer lens 15° beam angle

VEGA TWINS

POWER STANDARD

		.01	.02
		BPM50	BPM3181
40°		250 mA 32 W 2716 – 2760 – 2890 lm	500 mA 72 W 2710 – 3076 – 3444 lm
	2700 K	656EB6W152	656EE6W152
	3000 K	656EB6W153	656EE6W153
60°	4000 K	656EB6W155	656EE6W155
	2700 K	656EB6W172	656EE6W172
	3000 K	656EB6W173	656EE6W173
	4000 K	656EB6W175	656EE6W175

POWER HIGH

		.01
		BPM300
40°		350 mA 48 W 3568 – 3640 – 3732 lm
	2700 K	656EB6W352
	3000 K	656EB6W353
60°	4000 K	656EB6W355
	2700 K	656EB6W372
	3000 K	656EB6W373
	4000 K	656EB6W375

POWER GU5.3


		.01	.02
		GU5.3	GU5.3
		Max. 2 × 8 W LED	Max. 2 × 20 W LED
		656EB6W4XXX	656EE6W4XXX

POWER GU10

		.01	.02
		GU10	GU10
		Max. 2 × 8 W LED	Max. 2 × 20 W LED
.GU		656EB6W5XXX	656EE6W5XXX

POWER GX8.5

		.02
		GX8.5
		Max. 2 × 20 W LED
.CD		656EE6W6XXX

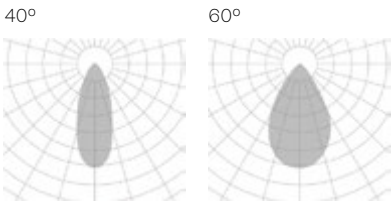


The data shown corresponds to raw values.


- DIMM OPTIONS
- On-Off
 - D · Dali
 - P · Push
 - V · 1.10v
- Down light

VEGA ZETA

.01

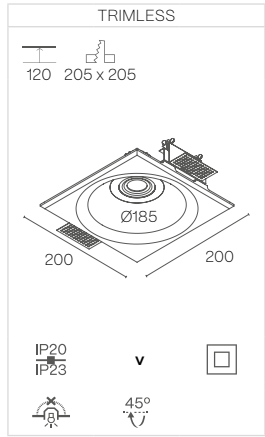

CEILING THICKNESS
10-20 mm

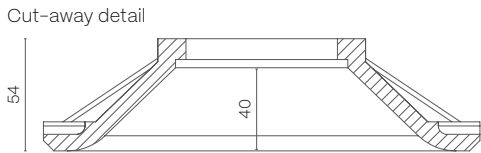

This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS
- Wireless control options
 - Wall washer lens 15° beam angle

VEGA ZETA

POWER STANDARD

		.01
		BPM50
		250 mA 8 W 1358 – 1380 – 1445 lm
40°	2700 K	657EB6W152
	3000 K	657EB6W153
	4000 K	657EB6W155
60°	2700 K	657EB6W172
	3000 K	657EB6W173
	4000 K	657EB6W175

POWER GU5.3


		.01
		GU5.3
		Max. 20 W LED
-		657EB6W4XXX

POWER HIGH

		.01
		BPM300
		350 mA 12 W 1784 – 1820 – 1866 lm
40°	2700 K	657EB6W352
	3000 K	657EB6W353
	4000 K	657EB6W355
60°	2700 K	657EB6W372
	3000 K	657EB6W373
	4000 K	657EB6W375

POWER GU10

		.01
		GU10
		Max. 20 W LED
.GU		657EB6W5XXX

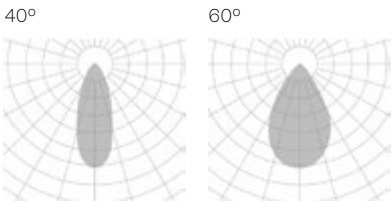

The data shown corresponds to raw values.

- DIMM OPTIONS
- On-Off
 - D · Dali
 - P · Push
 - V · 1.10v

Down light



ESPIGA FAMILY



CRISMOSIL

CRI
≥90

IK08

LIFE
50000H

DIM
OPTIONAL



REMOTE

INDOOR


220-240 V
50-60 Hz

CE


ESPIGA SOFT

.01

.02

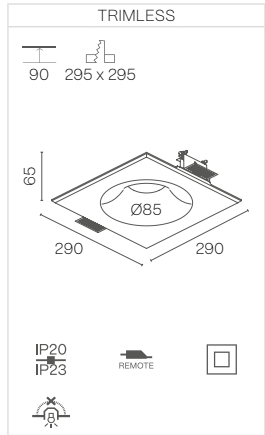


CEILING THICKNESS
10-20 mm

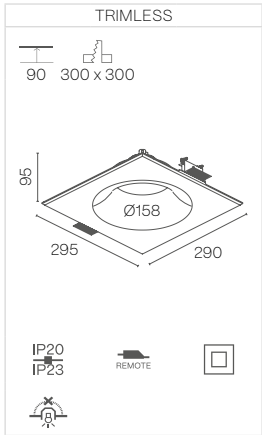

CEILING THICKNESS
10-20 mm

.03

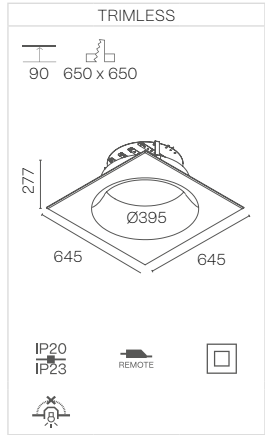

CEILING THICKNESS
13 mm

This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS
- Wireless control options
 - Wall washer lens 15° beam angle

ESPIGA SOFT

POWER STANDARD

		.01	.02	.03
		BPM50	BPM3181	-
Opal		250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 16 W 2720 - 2767 - 2888 lm	500 mA 11 W 3272 - 3876 - 4172 lm
	2700 K	660EB6W112	660EE6W112	660EH6W112
	3000 K	660EB6W113	660EE6W113	660EH6W113
	4000 K	660EB6W115	660EE6W115	660EH6W115

POWER HIGH

		.01	.03
		BPM300	-
Opal		350 mA 12 W 1784 - 1820 - 1866 lm	500 mA 22 W 6544 - 7752 - 8344 lm
	2700 K	660EB6W312	660EH6W312
	3000 K	660EB6W313	660EH6W313
	4000 K	660EB6W315	660EH6W315


POWER GU5.3

		.01
		GU5.3
		Max. 8 W LED
-		660EB6W4XXX

POWER GU10

		.01
		GU10
		Max. 8 W LED
.GU		660EB6W5XXX


Opal




The data shown corresponds to raw values.

- DIMM OPTIONS
- On-Off
 - Dali
 - Push
 - 1.10v
- Down light


.01

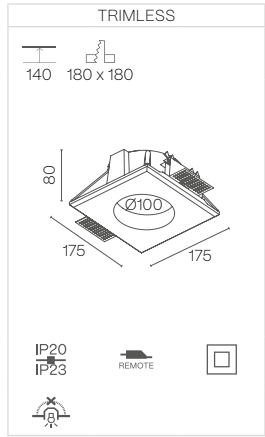

.02

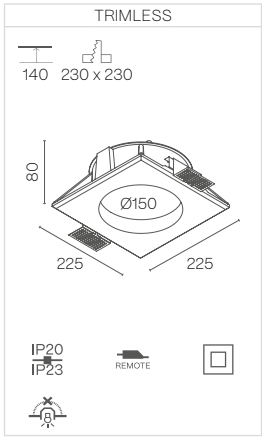


.03

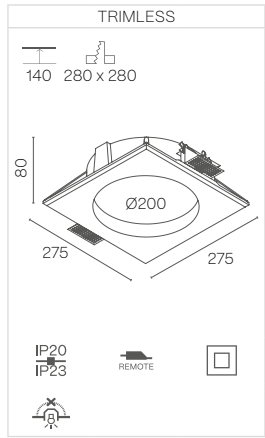

CEILING THICKNESS
10-20 mm

Cut-away detail



This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling
- Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

- ON DEMAND OPTIONS**
- Wireless control options
 - Wall washer lens 15° beam angle

POWER STANDARD

		.01	.02	.03
		BPM50	BPM3181	BPM200
		250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm	600 mA 25 W N/A - 1700 - 2040 lm
Opal	2700 K	610EB6W112	610EE6W112	610EH6W112
	3000 K	610EB6W113	610EE6W113	610EH6W113
	4000 K	610EB6W115	610EE6W115	610EH6W115

POWER HIGH

		.01	
		BPM300	
		350 mA 12 W 1784 - 1820 - 1866 lm	
Opal	2700 K	610EB6W312	
	3000 K	610EB6W313	
	4000 K	610EB6W315	

POWER GU5.3

		.01
		GU5.3
		Max. 8 W LED
-		610EB6W4XXX

POWER GU10

		.01
		GU10
		Max. 8 W LED
.GU		610EB6W5XXX

Opal



The data shown corresponds to raw values.

- DIMM OPTIONS**
- On-Off
 - Dali
 - Push
 - 1.10v

Down light




ESPIGA SQ


ESPIGA SQ

.01

.02

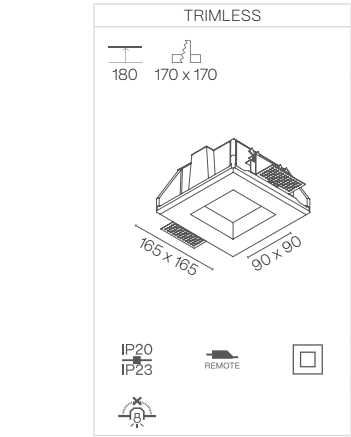


.03

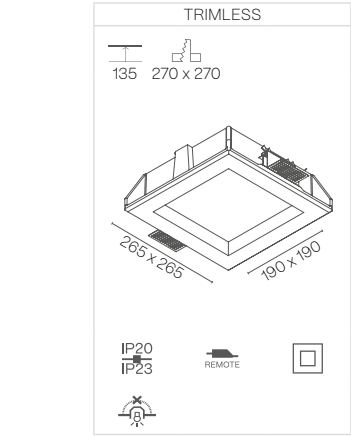

 **CEILING THICKNESS**
10-20 mm

Cut-away detail



This product can be painted by the customer.

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

 **ON DEMAND OPTIONS**

-  Wireless control options
-  Wall washer lens
15° beam angle

POWER STANDARD

		.01	.02	.03
		 BPM50	 BPM3181	 BPM200
	Opal	250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm	600 mA 25 W N/A - 1700 - 2040 lm
		2700 K 614EB6W112 	614EE6W112 	614EH6W112 
		3000 K 614EB6W113 	614EE6W113 	614EH6W113 
		4000 K 614EB6W115 	614EE6W115 	614EH6W115 

POWER HIGH

		.01	
		 BPM300	
	Opal	350 mA 12 W 1784 - 1820 - 1866 lm	
		2700 K 614EB6W312 	
		3000 K 614EB6W313 	
		4000 K 614EB6W315 	


POWER GU5.3

		.01
		 GU5 3
		Max. 8 W LED
		- 614EB6W4XXX

POWER GU10

		.01
		 GU10
		Max. 8 W LED
		.GU 614EB6W5XXX

Opal



The data shown corresponds to raw values.

 **DIMM OPTIONS**

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

 Down light


ESPIGA SIRIO

.01

.02




.03

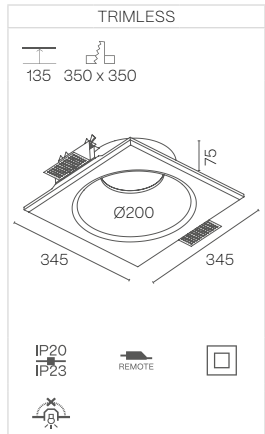

 **CEILING THICKNESS**
10-20 mm

Cut-away detail



This product must be painted by the customer.

-  Cut hole
-  Minimum height of the false ceiling
-  Luminaire not suitable to be covered with thermal insulating material

LUMINAIRE INCLUDES
Recessed with frame mounting kit

 ON DEMAND OPTIONS

-  Wireless control options
-  Wall washer lens
15° beam angle

ESPIGA SIRIO

POWER STANDARD

		.01	.02	.03
		 BPM50	 BPM3181	 BPM200
	Opal	250 mA 8 W 1358 - 1380 - 1445 lm	500 mA 18 W 1355 - 1538 - 1722 lm	600 mA 25 W N/A - 1700 - 2040 lm
		2700 K 612EB6W112 ✖	2700 K 612EE6W112 ✖	2700 K 612EH6W112 ✖
		3000 K 612EB6W113 ✖	3000 K 612EE6W113 ✖	3000 K 612EH6W113 ✖
		4000 K 612EB6W115 ✖	4000 K 612EE6W115 ✖	4000 K 612EH6W115 ✖

POWER HIGH

		.01	
		 BPM300	
	Opal	350 mA 12 W 1784 - 1820 - 1866 lm	
		2700 K 612EB6W312 ✖	
		3000 K 612EB6W313 ✖	
		4000 K 612EB6W315 ✖	

POWER GU5.3

		.01
		 GU5.3
		Max. 8 W LED
		- 612EB6W4XXX

POWER GU10

		.01
		 GU10
		Max. 8 W LED
		.GU 612EB6W5XXX

Opal



The data shown corresponds to raw values.

 DIMM OPTIONS

- O · On-Off
- D · Dali
- P · Push
- V · 1.10v

 Down light



ORBIT FAMILY

CRISMOSIL

CRI
≥90

IK08

LIFE
50000h

DIM
OPTIONAL



INTEGRATED




220-240 V
50-60 Hz



ORBIT

.01

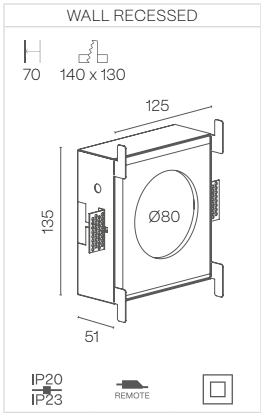

POWER STANDARD

		.01	
25°	700 mA	2 W 202 – 233 – 251 lm	
	2700 K	641EB7W142 ✖	
	3000 K	641EB7W143 ✖	
	4000 K	641EB7W145 ✖	

The data shown corresponds to raw values.
This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling

- ✖ DIMM OPTIONS
- O · On-Off

D · Dali


P · Push

V · 1.10v

- Down light
- LUMINAIRE INCLUDES
Recessed mounting kit

ORBIT ARA


.01

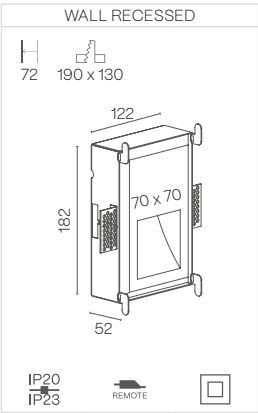

POWER STANDARD

		.01	
25°	700 mA	2 W 202 – 233 – 251 lm	
	2700 K	642EB7W142 ✖	
	3000 K	642EB7W143 ✖	
	4000 K	642EB7W145 ✖	

Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling

- ✖ DIMM OPTIONS
- O · On-Off

D · Dali


P · Push

V · 1.10v


- Down light
- LUMINAIRE INCLUDES
Recessed mounting kit

ORBIT NADIR


.00

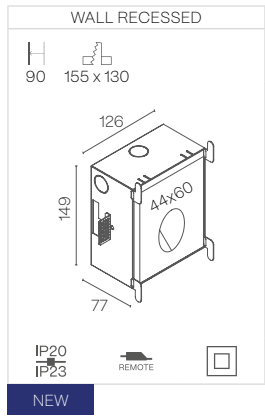


.01

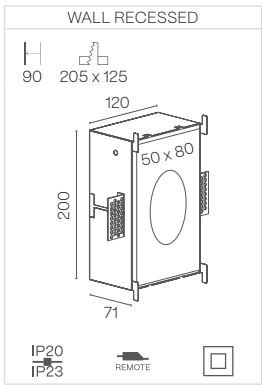

.02

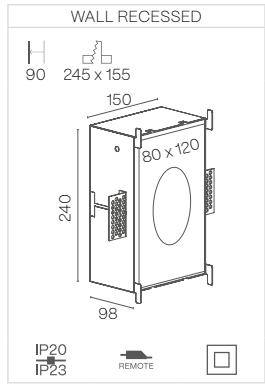

Cut-away detail

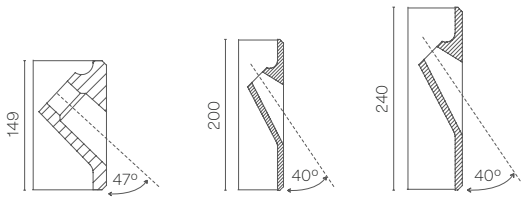

This product must be painted by the customer.

- Cut hole
- Minimum height of the false ceiling

ORBIT NADIR

POWER STANDARD

		.00	.01	.02
25°	700 mA	2,5 W 202 – 233 – 251 lm	2,5 W 202 – 233 – 251 lm	2,5 W 202 – 233 – 251 lm
	2700 K	640EA7W142	640EB7W142	640EE7W142
	3000 K	640EA7W143	640EB7W143	640EE7W143
	4000 K	640EA7W145	640EB7W145	640EE7W145

The data shown corresponds to raw values.

DIMM OPTIONS

- On-Off
- Dali
- Push
- 1.10v

Down light

LUMINAIRE INCLUDES
Recessed mounting kit



DRACO FAMILY

CRISMOSIL

CRI
≥90

IK08

LIFE
50000H

DIM
OPTIONAL

INDOOR


220-240 V
50-60 Hz

CE




DRACO

.00

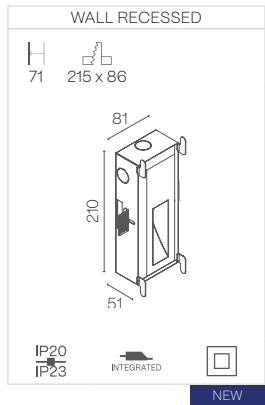


.02

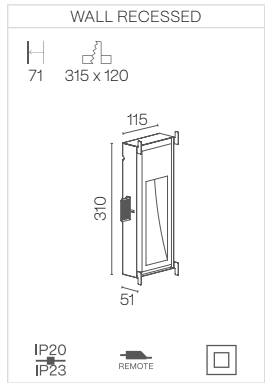

POWER STANDARD

		.00	.01	.02
	700 mA	2,5 W 202 – 233 – 251 lm	2,5 W 202 – 233 – 251 lm	2,5 W 202 – 233 – 251 lm
	2700 K	605EA7W142 ✖	605EB7W142 ✖	605EE7W142 ✖
	3000 K	605EA7W143 ✖	605EB7W143 ✖	605EE7W143 ✖
	4000 K	605EA7W145 ✖	605EB7W145 ✖	605EE7W145 ✖

Cut-away detail

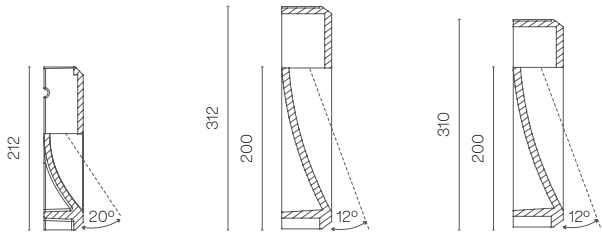

The data shown corresponds to raw values.
This product must be painted by the customer.

-  Cut hole
-  Minimum height of the false ceiling

- ✖ **DIMM OPTIONS**
- · On-Off

D · Dali


P · Push

V · 1.10v

-  Down light
- LUMINAIRE INCLUDES**
Recessed mounting kit

DRACO ORION

.01

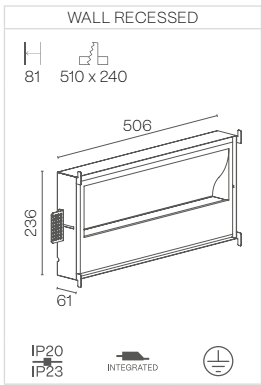


POWER STANDARD

		.01	
	500 mA	8 W 1227 – 1454 – 1565 lm	
	2700 K	606EB7W142 ✖	
	3000 K	606EB7W143 ✖	
	4000 K	606EB7W145 ✖	

POWER HIGH

		.01	
	500 mA	17 W 2454 – 2907 – 3129 lm	
	2700 K	606EB7W342 ✖	
	3000 K	606EB7W343 ✖	
	4000 K	606EB7W345 ✖	

Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

-  Cut hole
-  Minimum height of the false ceiling

- ✖ **DIMM OPTIONS**
- · On-Off

D · Dali

P · Push


V · 1.10v

-  Up light
- LUMINAIRE INCLUDES**
Recessed mounting kit

DRACO WALL ORION


.01

WALL SURFACE

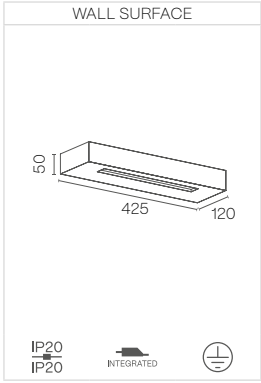


.02

WALL SURFACE

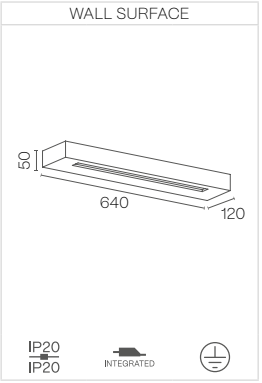

.03

WALL SURFACE

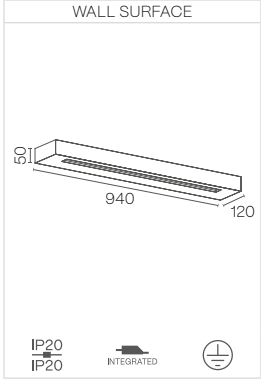

This product must be painted by the customer.

LUMINAIRE INCLUDES
Wall surface mounting kit

DRACO WALL ORION

POWER STANDARD

		.01	.02	.03
	500 mA	12 W 1636 – 1938 – 2086 lm	24 W 3272 – 3876 – 4172 lm	36 W 4908 – 5814 – 6258 lm
Opal	2700 K	662EB7W112	662EE7W112	662EH7W112
	3000 K	662EB7W113	662EE7W113	662EH7W113
	4000 K	662EB7W115	662EE7W115	662EH7W115

POWER HIGH

		.01	.02	.03
	500 mA	24 W 3272 – 3876 – 4172 lm	48 W 6544 – 7752 – 8344 lm	72 W 9816 – 11628 – 12516 lm
Opal	2700 K	662EB7W312	662EE7W312	662EH7W312
	3000 K	662EB7W313	662EE7W313	662EH7W313
	4000 K	662EB7W315	662EE7W315	662EH7W315

 DIMM OPTIONS

O · On–Off

D · Dali

P · Push

V · 1.10v

 Up/down light

The data shown corresponds to raw values.

DRACO TUCANA

.01

WALL RECESSED

70

315 x 150

145

310

50

IP20

IP23

INTEGRATED

.02

WALL RECESSED

91

390 x 255

250

385

71

IP20

IP23

INTEGRATED

POWER STANDARD

		.01	.02
		500 mA 3 W 409 – 421 – 438 lm	500 mA 3 W 409 – 485 – 522 lm
Opal	2700 K	607EB7W112	607EE7W112
	3000 K	607EB7W113	607EE7W113
	4000 K	607EB7W115	607EE7W115

POWER HIGH


		.01	.02
		700 mA 4 W 555 – 571 – 593 lm	500 mA 6 W 818 – 969 – 1043 lm
Opal	2700 K	607EB7W312	607EE7W312
	3000 K	607EB7W313	607EE7W313
	4000 K	607EB7W315	607EE7W315

* ELECTRIC CLASS II and DRIVER REMOTE when dimmable.
The data shown corresponds to raw values.
This product must be painted by the customer.

Cut hole
Minimum height of the false ceiling

DIMM OPTIONS
O · On-Off
D · Dali
P · Push
V · 1.10v

Up light
LUMINAIRE INCLUDES
Recessed mounting kit

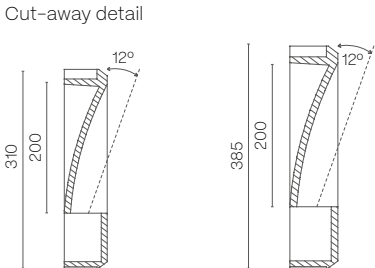

DRACO ZAHARA

.01

WALL RECESSED

91

385 x 255

250

378

71

IP20

IP23

INTEGRATED

.02

WALL RECESSED

91

390 x 315

310

385

71

IP20

IP23

INTEGRATED


POWER STANDARD

		.01	.02
	500 mA	3 W 409 – 485 – 522 lm	3 W 409 – 485 – 522 lm
Opal	2700 K	608EB7W112	608EE7W112
	3000 K	608EB7W113	608EE7W113
	4000 K	608EB7W115	608EE7W115

POWER HIGH

		.01	.02
	500 mA	6 W 818 – 969 – 1043 lm	6 W 818 – 969 – 1043 lm
Opal	2700 K	608EB7W312	608EE7W312
	3000 K	608EB7W313	608EE7W313
	4000 K	608EB7W315	608EE7W315

Cut-away detail



The data shown corresponds to raw values.
This product must be painted by the customer.

Cut hole
Minimum height of the false ceiling

DIMM OPTIONS
O · On-Off
D · Dali
P · Push
V · 1.10v

Up light
LUMINAIRE INCLUDES
Recessed mounting kit





TYRA FAMILY


TYRA

.01

.02

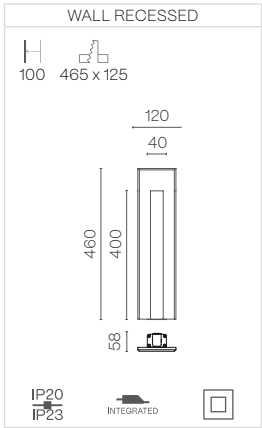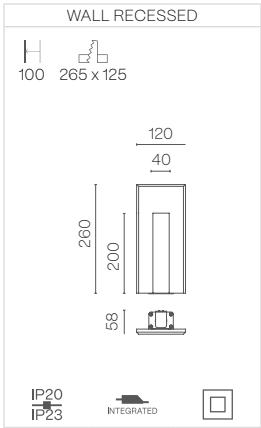

.03

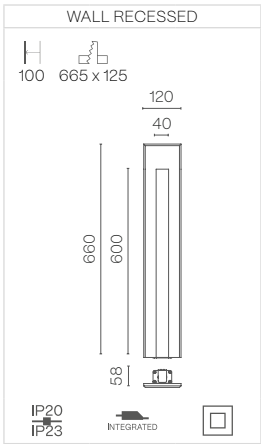

This product must be painted by the customer.

- 

Cut hole
- 

Minimum height of the false ceiling

LUMINAIRE INCLUDES
Recessed mounting kit

TYRA

POWER STANDARD

		.01	.02	.03
	700 mA	2 W 237 – 246 – 261 lm	2 W 237 – 246 – 261 lm	2 W 237 – 246 – 261 lm
	2700 K	652EB7W142 	652EE7W142 	652EH7W142 
	3000 K	652EB7W143 	652EE7W143 	652EH7W143 
	4000 K	652EB7W145 	652EE7W145 	652EH7W145 

The data shown corresponds to raw values.

-  **DIMM OPTIONS**
- O** · On-Off

D · Dali

P · Push

V · 1.10v

 Down light

.01

WALL RECESSED

100

265 x 150

145

65

260

200

85

IP20

IP23

INTEGRATED

.02

WALL RECESSED

100

465 x 150

145

65

460

400

85

IP20

IP23

INTEGRATED

.03

WALL RECESSED

100

665 x 150

145

65

660

600

85

IP20

IP23

INTEGRATED

This product must be painted by the customer.

Cut hole

Minimum height of the false ceiling

LUMINAIRE INCLUDES
Recessed mounting kit

556

TYRA FAMILY

POWER STANDARD

		.01	.02	.03
		6 W 502 – 537 – 580 lm	6 W 502 – 537 – 580 lm	6 W 502 – 537 – 580 lm
Opal	2700 K	624EB7W112	624EE7W112	624EH7W112
	3000 K	624EB7W113	624EE7W113	624EH7W113
	4000 K	624EB7W115	624EE7W115	624EH7W115

POWER HIGH

		.01	.02	.03
		9 W 713 – 750 – 825 lm	9 W 713 – 750 – 825 lm	9 W 713 – 750 – 825 lm
Opal	2700 K	624EB7W312	624EE7W312	624EH7W312
	3000 K	624EB7W313	624EE7W313	624EH7W313
	4000 K	624EB7W315	624EE7W315	624EH7W315

The data shown corresponds to raw values.

DIMM OPTIONS

On-Off

Dali

Push

1.10v


Down light




TECHNICAL INFORMATION

INFORMACIÓN TÉCNICA


CONNECTION BOXES

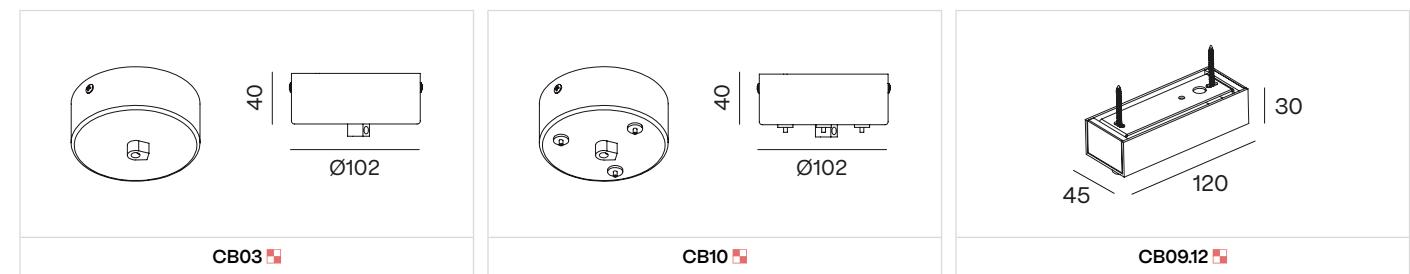

RECESSED CONNECTION BOXES




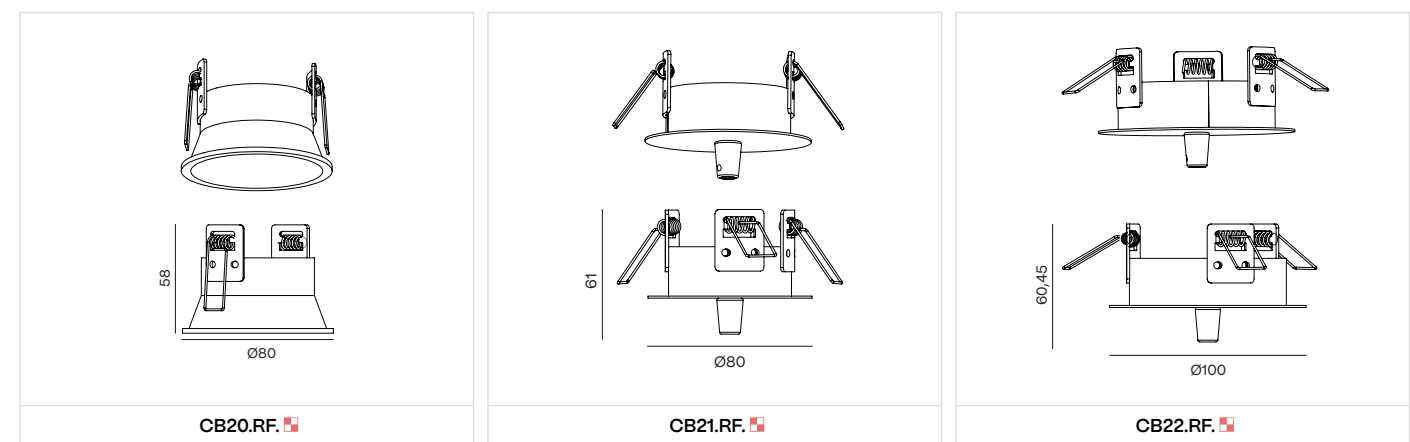


KIT PENDANT BOXES

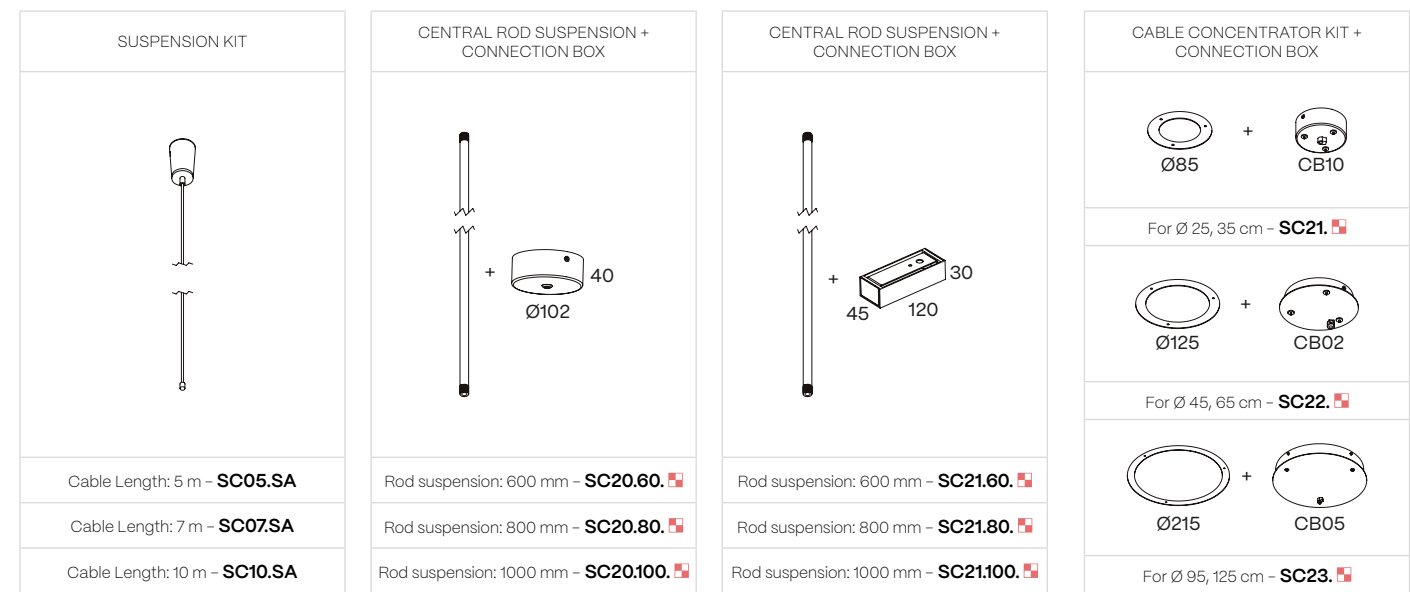

- FINISH**
- B** · Black
 - W** · White
 - S** · Special color

DRIVER BOXES

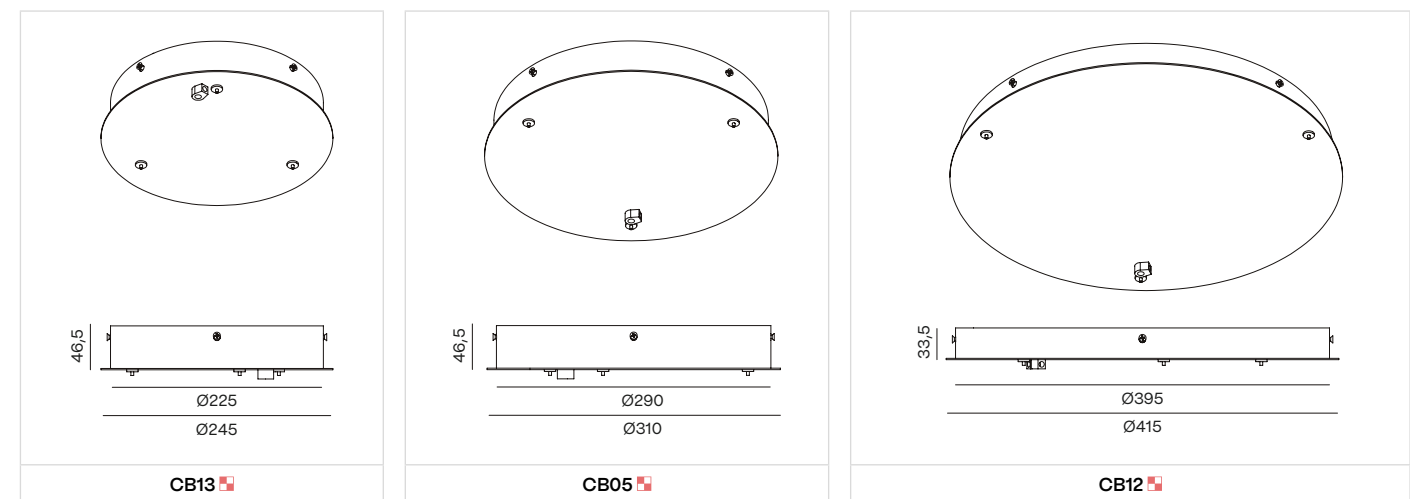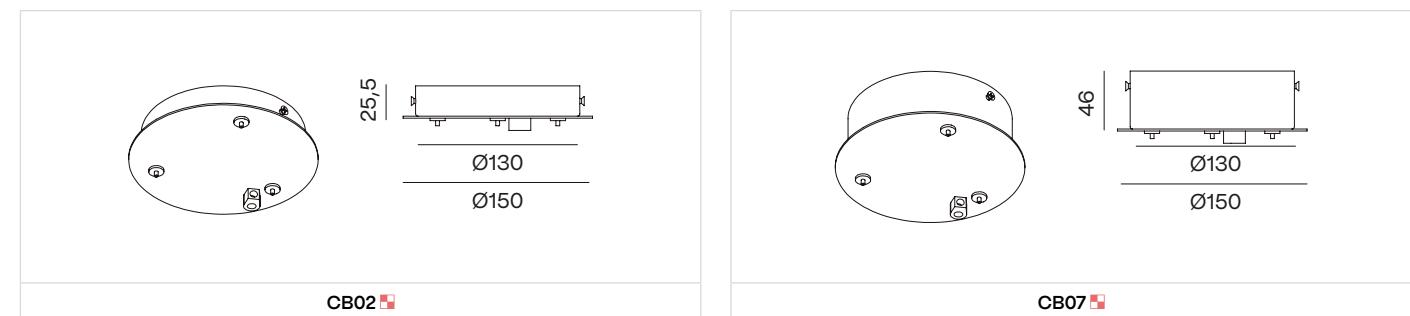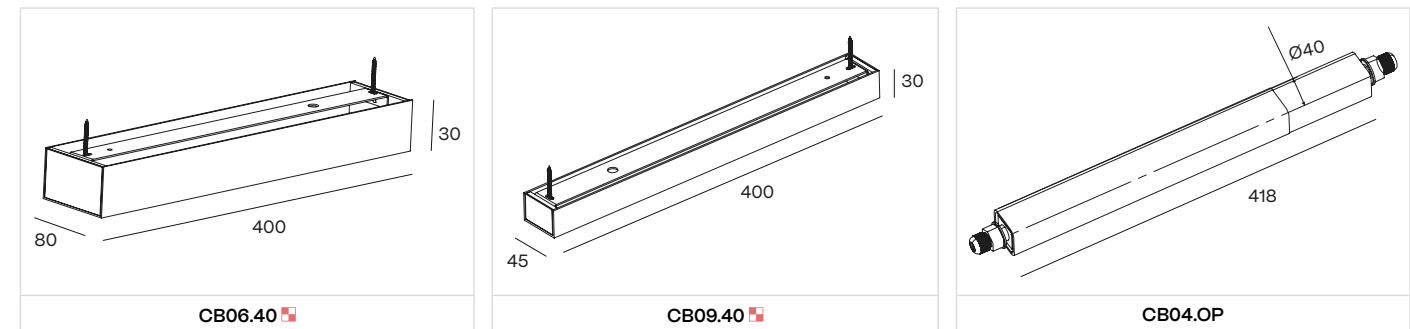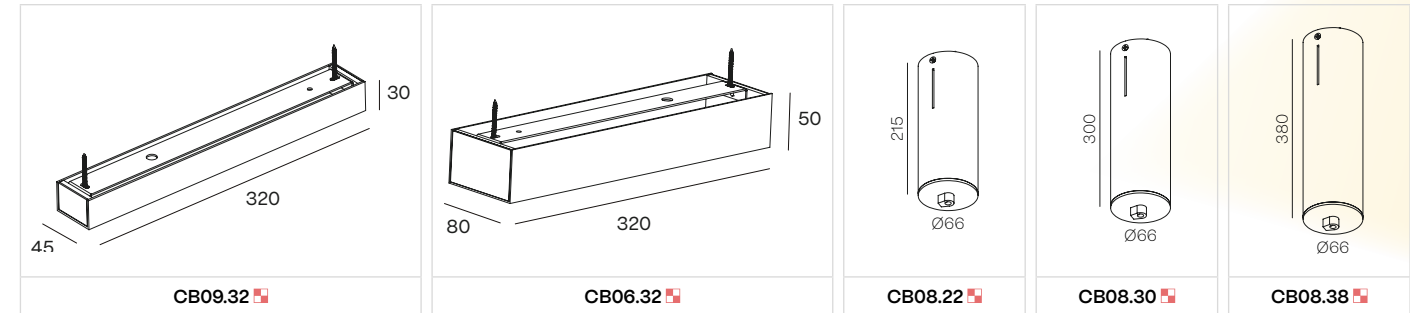

Check luminaire's compatibility.

- FINISH**
- B** · Black
 - W** · White
 - S** · Special color

562



ALPHABETICAL INDEX

ACOUSTIC ACCESORIES.....	454	ALARIK NANO PATRICIA SHAPE	181	ALBERTA INSIDE	80
ACOUSTIC ALABAMA	430	ALARIK NANO PATRICIA ZOOM.....	181	ALBERTA INSIDE HAT	64
ACOUSTIC ALABAMA SQ	430	ALARIK NANO WALL WASHER	180	ALBERTA INSIDE VERTICAL.....	82
ACOUSTIC ALARIK SLIM	432	ALARIK SLIM	166	ALBERTA INSIDE VTILT	82
ACOUSTIC ALBA.....	438	ALARIK SLIM DOT	168	ALBERTA OUTSIDE.....	76
ACOUSTIC ALBA MINI	436	ALARIK SLIM LED BALL	168	ALBERTA SLIGHT	92
ACOUSTIC ALBERTA SOFT.....	428	ALARIK SLIM LED MODULES.....	167	ALBERTA SLIGHT CONNECT	52
ACOUSTIC ALZIRA.....	448	ALARIK SLIM LED TUBE	168	ALBERTA SLIGHT ECCENTRIC	68
ACOUSTIC KLIMT FIX	450	ALARIK SLIM LENSES	169	ALBERTA SOFT.....	88
ACOUSTIC KLIMT FIX SQ	450	ALARIK SLIM LUMINAIRE	156	ALBERTA SOFT CONNECT	48
ACOUSTIC LAMBDA.....	442	ALARIK SLIM MOTION LENSES	168	ALBERTA SOFT LOOP	60
ACOUSTIC ALBA LINGGO MINI	444	ALARIK SLIM PATRICIA	169	ALBERTA SOFT OUTSIDE	72
ADIMA	418	ALARIK SLIM PATRICIA ZOOM.....	169	ALBERTA SOFT STONE.....	56
ADIMA SQ.....	418	ALARIK SLIM ROUND	170	ALDAIA	348
ALABAMA.....	124	ALBA DOUBLE.....	224	ALDAIA SQ	349
ALABAMA LOOP	120	ALBA LINGGO	232	ALZIRA.....	256
ALABAMA SLIGHT	128	ALBA LINGGO MINI	228	ASTRA.....	322
ALABAMA SLIGHT SQ	132	ALBA MINI	196	CAN REVIEW	342
ALABAMA SLIM	136	ALBA MINI AIO.....	200	CAN REVIEW IP65.....	344
ALABAMA STONE.....	116	ALBA MINI MODULIGHT	204	CATLI	362
ALABAMA SUPER SLIM	140	ALBA MINI MODULIGHT LED MODULES	207	CATLI CLASSIC.....	368
ALABAMA SUPER SLIM TILT	142	ALBA MINI MODULIGHT LENSES	206	CATLI CLASSIC SQ	369
ALARIK MINI	172	ALBA MINI MODULIGHT MINI TUBE.....	205	CATLI HALKA.....	370
ALARIK MINI LED MODULES	173	ALBA PLUS.....	220	CATLI SQ.....	364
ALARIK MINI LENSES	174	ALBA PRO	214	CATLI SQ DOUBLE.....	366
ALARIK MINI MOTION LENSES.....	174	ALBA PRO CRISMOSIL	496	CUBE	298
ALARIK MINI PATRICIA.....	174	ALBA PRO CRISMOSIL MODULE LENSES.....	497	CUBE DOUBLE	298
ALARIK MINI PATRICIA FLAT	175	ALBA PRO CRISMOSIL MODULE LIGHT.....	497	CUBE TRIPLE	298
ALARIK MINI PATRICIA LOL	175	ALBA PRO CRISMOSIL SPOTLIGHT.....	496	CUBE TUBE.....	300
ALARIK MINI PATRICIA ZOOM.....	175	ALBA PRO CRISMOSIL SPOTLIGHT STICK...	496	CUBE TUBE MOVE.....	302
ALARIK MINI ROUND	176	ALBA PRO MODULE LENSES	216	DRACO	546
ALARIK MINI ROUND LENSES	175	ALBA PRO MODULE LIGHT	216	DRACO ORION.....	547
ALARIK NANO	178	ALBA PRO SPOTLIGHT	215	DRACO TUCANA.....	550
ALARIK NANO DOUBLE	182	ALBA PRO SPOTLIGHT STICK.....	215	DRACO WALL ORION.....	548
ALARIK NANO ESFERA	180	ALBA WING.....	210	DRACO ZAHARA.....	551
ALARIK NANO LED MODULES	179	ALBERTA.....	96	ESPIGA	532
ALARIK NANO LENSES COMPACT	180	ALBERTA DUE	84	ESPIGA SIRIO.....	536
ALARIK NANO PATRICIA FLIP	181	ALBERTA DUE MOVE.....	86	ESPIGA SOFT	530

ALPHABETICAL INDEX

ESPIGA SQ.....	534	MARTORELL MINI CRATE TRIPLE	276	TYRA.....	554
FACE IRIS.....	396	MARTORELL MOVE.....	268	TYRA LYRA.....	556
FACE KIERA	398	MARTORELL SQ	278	VADI.....	352
FACE KIERA CEMENT	400	MARTORELL SQ DOUBLE.....	278	VAULT	242
FACE TUBULAR	392	MARTORELL TÁRREGA	280	VEGA	520
FACE TUBULAR SPAC	394	MARTORELL TUBE MOVE	272	VEGA ADHARA	522
FLAT	406	MARTORELL TUBULAR 20.....	282	VEGA TWINS	524
FLAT SLIM	406	MARTORELL TUBULAR 40.....	282	VEGA ZETA	526
FLORIDA	106	MARTORELL TUBULAR 60.....	282	VENISE	388
FLORIDA DECO.....	102	MARTORELL TUBULAR TILT	282	VIO	326
FLORIDA SQ	110	MENORCA DEEP STRAIGHT.....	488	VIO ASYMETRIC.....	326
FLY	236	MENORCA DEEP TILT	489	VIO COMPACT.....	326
GALANTA BONETE	380	MENORCA DEEP WAVE.....	490	VIO DEEP.....	326
GALANTA DEEP.....	378	MENORCA EDGE.....	491	VIO DEEP MOVE.....	326
HURY	408	MENORCA FLAT	492	VIO DOME.....	326
IKI	410	MENORCA WHASER.....	493	VIO DOME MOVE	326
KAPI	412	NUVOL	470	VIO MOVE	326
KLEE	419	OHIO	146	VIO SQ	326
KLEE SQ	419	OHIO SQ.....	150	VIO SQ MOVE	326
KLIMT	292	OKKIA	250	WALL ARA OUT	460
KLIMT FIX.....	294	OKKIA PLUS	250	WALL DRACO OUT	464
KONI	356	ORACLE	310	WALL ZAHARA OUT	462
KONI DEEP	358	ORBIT	540	WAVE	476
KONI TURTA	359	ORBIT ARA.....	541	WAVE DOME	479
KUU	414	ORBIT NADIR	542	WAVE SOFT.....	478
LENT MODULAR.....	314	PATRICIA.....	286	ZENIT	502
LENT MOTION	318	ROY.....	338	ZENIT DEEP	504
LUK CRUSADER	306	SAND	482	ZENIT DEEP TWINS	506
LUK HAWKEYE	307	SASSY	332	ZENIT MOVE	507
LUK HAWKEYE DOUBLE	307	SASSY OVAL HOLE	332	ZENIT MOVE SQ.....	508
MAGRIT	418	SASSY ROUND HOLE.....	332	ZENIT ORTO	509
MARTORELL	270	SASSY SNOOT	332	ZENIT RING.....	503
MARTORELL CRATE.....	274	SASSY SQ.....	334	ZENIT SIDEREA	510
MARTORELL CRATE DOUBLE.....	274	SUBLIM.....	384	ZENIT SIDEREA ASYMETRIC.....	512
MARTORELL CRATE TRIPLE.....	274	TRACKLIGHT LINEAR SYSTEM.....	188	ZENIT SQ.....	514
MARTORELL FLIP	266	TRACKLIGHT LUMINARIES	187	ZENIT STONE	515
MARTORELL MINI CRATE.....	276	TRACKLIGHT SPOTLIGHTS.....	189	ZENIT ZUBIA.....	516
MARTORELL MINI CRATE DOUBLE	276	TRACKLINE.....	186	ZENIT ZUBIA SQ	517



WARRANTY CONDITIONS

CONDICIONES DE GARANTÍA

BPM Lighting guarantees its luminaires, as well as the equipment it distributes.

Upon establishment of the legal warranty, BPM Lighting extends this warranty to cover manufacturing defects of the supplied luminaires for a period of 5 years from the invoice date.

The determination of the product defect will be made at the sole discretion of BPM Lighting, considering the overall performance of the product.

A decrease in light flux is a natural phenomenon throughout the LED's lifespan and is, therefore, not covered by the warranty.

1. WARRANTY TERMS & CONDITIONS

The limited conventional warranty is applicable only when:

1. The products are stored, installed, used, and maintained according to the technical specifications indicated on the product label (with special reference to voltage and operating temperature), the mounting instructions provided with it, and the information indicated in the respective catalogues or on the website.
2. Installation and maintenance tasks are performed by qualified technicians.
3. The reported defect affects the product's functionality.
4. The product has not been modified, altered, or treated in any way, with chemicals or otherwise, without prior written authorization from BPM Lighting.
5. The product subject to warranty, if required by BPM Lighting, must be available for further technical analysis for the necessary time to carry it out.
6. The defect has been communicated to BPM Lighting in writing, via email, within 30 days from the date of receipt of the products (in the case of visible defects) or after their verification (in the case of hidden defects), including a photographic proof of the silver label on the product. For claims related to breakages, incorrect references, or quantities, you have 10 days to submit a claim. Any claim for breakages must be documented on the delivery receipt from the shipping agency.

When sending material for a claim, it is essential that the accompanying documentation is attached to the package to avoid rejection of the material, and the reason for the claim, article reference, quantity, date, and invoice number must be indicated.

In the event that BPM Lighting acknowledges the defect, it will choose at its discretion whether to repair or replace the defective product or component with the same product or an equivalent one, taking into account the technical evolution of the products and their components.

Any technical intervention or replacement (partial or complete) of the product carried out under the warranty will not in any case give the right to an extension or renewal of the warranty beyond the stipulated years from the invoice date. The repair or replacement of the product recognized as defective by BPM Lighting does not include the costs or expenses of materials or labour for disassembly, uninstallation, assembly,

or installation. BPM Lighting is not liable and will not reimburse any consequential loss or indirect, compensatory, or other damages suffered as a result of a defective product, such as, but not limited to, assembly costs, on-site installation costs, potential downtime costs, loss of profits, or the overall costs incurred by the purchasers.

2. WARRANTY CANCELLATION CLAUSES

This conventional warranty does not cover:

1. Labor costs and expenses, equipment and warehouse costs, or any other additional costs related to and/or derived from any necessary intervention to repair the defect (such as, but not limited to, assembly, disassembly, and transportation of defective equipment, to be repaired or new products, which will be at the exclusive expense of the customer).
2. Electrical components subject to wear and tear, comparable to consumables (such as lamps, batteries, sensors, etc.).
3. Interruptions resulting from impulsive disturbances (surges) exceeding the limits set by IEC 61000-4-5 and IEC 61547 standards.
4. Potential remote-control systems (photocells, telecontrol modules, gateways, etc.) not supplied with the luminaire.
5. Plastic parts, such as polycarbonate or PMMA, subject to natural aging.
6. Product damage due to negligence, transportation, and unforeseen and unpredictable events not within normal use conditions as per section 1.1 (e.g., electrical discharges and lightning strikes).
7. Products that have switched on for more than 6,500 hours per year.
8. Luminaires not used for its intended purpose.
9. BPM Lighting shall not be held liable under any circumstances for accidental, compensatory, consequential, indirect, special, or other damages. BPM Lighting's liability for a product defect is strictly limited to the actual amount paid for the defective product.

This conventional warranty is the only warranty provided by BPM Lighting and is granted with the exclusion of other warranties, explicit or implied, such as, for example, warranties of merchantability or fitness for a particular purpose. The exclusive remedies available to the buyer for any non-conformity or defect in a product are those provided for by this warranty. The performance and lifespan of LEDs are not guaranteed if the luminaires have been installed in environments containing chemicals incompatible with the LEDs. Our technical department is available to verify the compatibility of the LEDs we use in relation to the substances present in the environment where the luminaires are installed.



WARRANTY CONDITIONS

CONDICIONES DE GARANTÍA

BPM Lighting garantiza sus luminarias, así como los equipos que distribuye.

Establecida la garantía legal, BPM Lighting extiende dicha garantía sobre los defectos de fabricación de las luminarias suministradas durante un período de 5 años a partir de la fecha de la factura. La determinación del defecto del producto la realizará BPM Lighting a su única discreción, considerando el rendimiento general dado por el producto. La depreciación del flujo luminoso es un fenómeno previsto durante la vida útil del LED y, por lo tanto, no está cubierto por la garantía.

1. CONDICIONES DE GARANTÍA

La garantía convencional limitada es aplicable solo cuando:

1. Los productos se almacenan, instalan, utilizan y mantienen según las especificaciones técnicas indicadas en el marcado del producto (con especial referencia a la tensión y a la temperatura de funcionamiento), a las instrucciones de montaje facilitadas con el mismo, a lo que se indica en los respectivos catálogos o en web.
2. La instalación y mantenimiento son ejecutados por personal técnico cualificado.
3. El defecto señalado perjudica las funciones del producto.
4. El producto no ha sido modificado, alterado o tratado en ningún modo, con agentes químicos o de cualquier otra manera, sin autorización previa y escrita de BPM Lighting
5. El producto objeto de la garantía, si así lo requiere BPM lighting, debe estar a disposición para más análisis técnicos durante el tiempo necesario para su realización.
6. El defecto ha sido comunicado a BPM Lighting por escrito, mediante correo electrónico antes de 30 días a partir de la fecha de recepción de los productos (en caso de defectos aparentes) o tras su verificación (en caso de defectos no visibles) mediante el envío de una prueba fotográfica de la etiqueta plateada presente en el producto. Para las incidencias por roturas, referencias erróneas o cantidades incorrectas, dispone de un plazo de 10 días para su reclamación. La reclamación por roturas deberá quedar documentada en el justificante de entrega de la agencia de transporte.

En el envío del material de incidencia, es imprescindible que la documentación vaya adjunta al bulto para que el material no sea rechazado, e indicar el motivo de la incidencia, referencia de artículos, cantidad, fecha y número de factura.

En el caso de que BPM Lighting reconozca el defecto, elegirá de manera discrecional si reparar o sustituir el producto o componente defectuoso con el mismo producto o con uno equivalente, teniendo en consideración la evolución técnica de los productos y la de sus componentes. Cualquier intervención técnica o sustitución (parcial o completa) del producto realizada en el marco de la garantía no dará derecho en ningún caso a una prórroga o renovación de la garantía más allá de los años estipulados a partir de la fecha de la factura.

La reparación o sustitución del producto reconocido como defectuoso por BPM Lighting no incluye los costes o gastos de material o de personal por el desmontaje, desinstalación,

montaje o instalación. BPM Lighting no es responsable y, por lo tanto, no reembolsará ninguna pérdida consecuente o daño indirecto, compensatorio o de otra naturaleza sufrida a causa de un producto defectuoso, como, a modo de ejemplo y no exhaustivo, los costes de ensamblaje, los costes de instalación in situ, los posibles costes por parada de la planta, la pérdida de ganancias y los costes totales de los compradores.

2. CLÁUSULAS DE ANULACIÓN DE LA GARANTÍA

Esta garantía convencional no cubre:

1. Costes y gastos de mano de obra, costes y gastos de equipamiento y almacén, así como cualquier otro coste adicional relativo y/o derivado de cualquier intervención necesaria para reparar el defecto (tales como, pero no limitados a, costes/gastos de montaje, desmontaje y transporte de equipos defectuosos, a reparar o productos nuevos, que correrán a cargo exclusivo del cliente);
2. Componentes eléctricos sujetos a desgaste asimilables a consumibles (como lámparas, pilas, sensores, etc.).
3. Interrupciones resultantes de perturbaciones impulsivas (sobretensiones) superiores a los requisitos de la norma IEC 61000-4-5 y IEC 61547.
4. Posibles sistemas de control remoto (fotocélulas, módulos de telecontrol, pasarelas, etc.) no suministrados con la luminaria.
5. Piezas di plástico, como por ejemplo policarbonato o PMMA, sometidas a envejecimiento natural.
6. Daños del producto debidos a negligencia, al transporte y a eventos imprevistos e imprevisibles que no entren en las condiciones normales de uso según el punto 1.1 (por ej.: descargas eléctricas y rayos).
7. Productos que hayan estado en funcionamiento durante un número de horas al año superior a 6.500 h.
8. Luminarias no utilizadas con el propósito para el que se han realizado.
9. BPM Lighting no será responsable en ningún caso de daños accidentales, de compensación, consecuentes, indirectos, especiales u otros daños. La responsabilidad de BPM Lighting respecto a un defecto del producto debe quedar limitada en todo caso a la suma pagada por ese producto defectuoso.

Esta garantía convencional es la única garantía otorgada por BPM Lighting y se concede con exclusión de las demás garantías, explícitas o implícitas como, por ejemplo, garantías de comerciabilidad o adecuación para un propósito particular. Las medidas adoptadas de forma exclusiva por parte del comprador para cualquier no conformidad o defecto en un producto serán sólo las previstas por esta garantía. Las prestaciones y la duración de los LEDs no están garantizadas si las luminarias se han instalado en tornos con presencia de sustancias químicas incompatibles con los mismos LEDs. Nuestro departamento técnico está a disposición para comprobar la compatiibilidad de los LEDs que utilizamos en relación con las sustancias presentes en el entorno donde se instalan las luminarias.



1. The products are stored, installed, used, and maintained according to the technical specifications indicated on the product label (with special reference to voltage and operating temperature), the mounting instructions provided with it, and the information indicated in the respective catalogues or on the website.
2. Installation and maintenance tasks are performed by qualified technicians.
3. The reported defect affects the product's functionality.
4. The product has not been modified, altered, or treated in any way, with chemicals or otherwise, without prior written authorization from BPM Iluminación S.L.
5. The product subject to warranty, if required by BPM Iluminación S.L., must be available for further technical analysis for the necessary time to carry it out.

CONDICIONES DE VENTA

1. Los productos se almacenan, instalan, utilizan y mantienen según las especificaciones técnicas indicadas en el marcado del producto (con especial referencia a la tensión y a la temperatura de funcionamiento), a las instrucciones de montaje facilitadas con el mismo, a lo que se indica en los respectivos catálogos o en web.
2. La instalación y mantenimiento son ejecutados por personal técnico cualificado.
3. El defecto señalado perjudica las funciones del producto.

CONNECTING YOUR EQUIPMENT...

CÓMO CONECTO?

DOES

When using a single driver, wire all lighting fixtures in series. LED strips must be wired in parallel.

DONT'S

Lighting fixtures must always be connected in no-voltage conditions. The driver must not be connected to the power supply when connecting the lighting fixtures. If there are intermediate connections, follow this diagram to avoid damaging your lighting fixtures. (Diagram) Lighting fixtures must not be connected directly to the AC power source without a driver. Never expose lighting fixtures to heat sources or other electronic equipment.



CONSIDERACIONES

Todas nuestras luminarias cuando usan un solo driver se cablearán en serie. Las tiras de led se deberán de cablear en paralelo entre sí.

ADVERTENCIAS

Las luminarias se deben de conectar siempre apagadas. No se debe de tener el driver conectado a la red encendido al conectar las luminarias. En caso de tener conexiones intermedias se debe de seguir el siguiente esquema para no dañar las luminarias. (Esquema) No se debe de conectar la luminaria directamente al AC sin driver. No se deben de colocar las luminarias cerca de fuentes de calor ni de otros aparatos electrónicos.

WIRING-EM CONVERTER LED BASIC WITH A STANDARD LED DRIVER AND ONE LED MODULE FOR MAIN AND EMERGENCY OPERATION

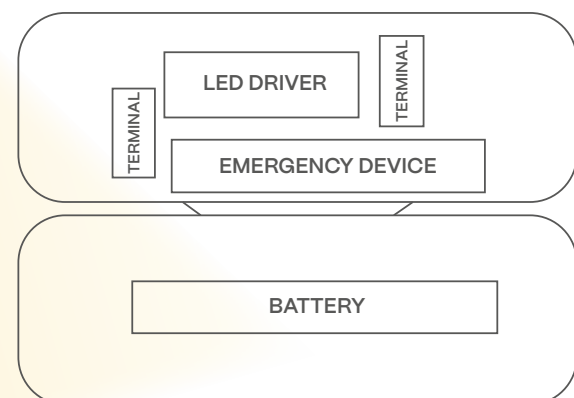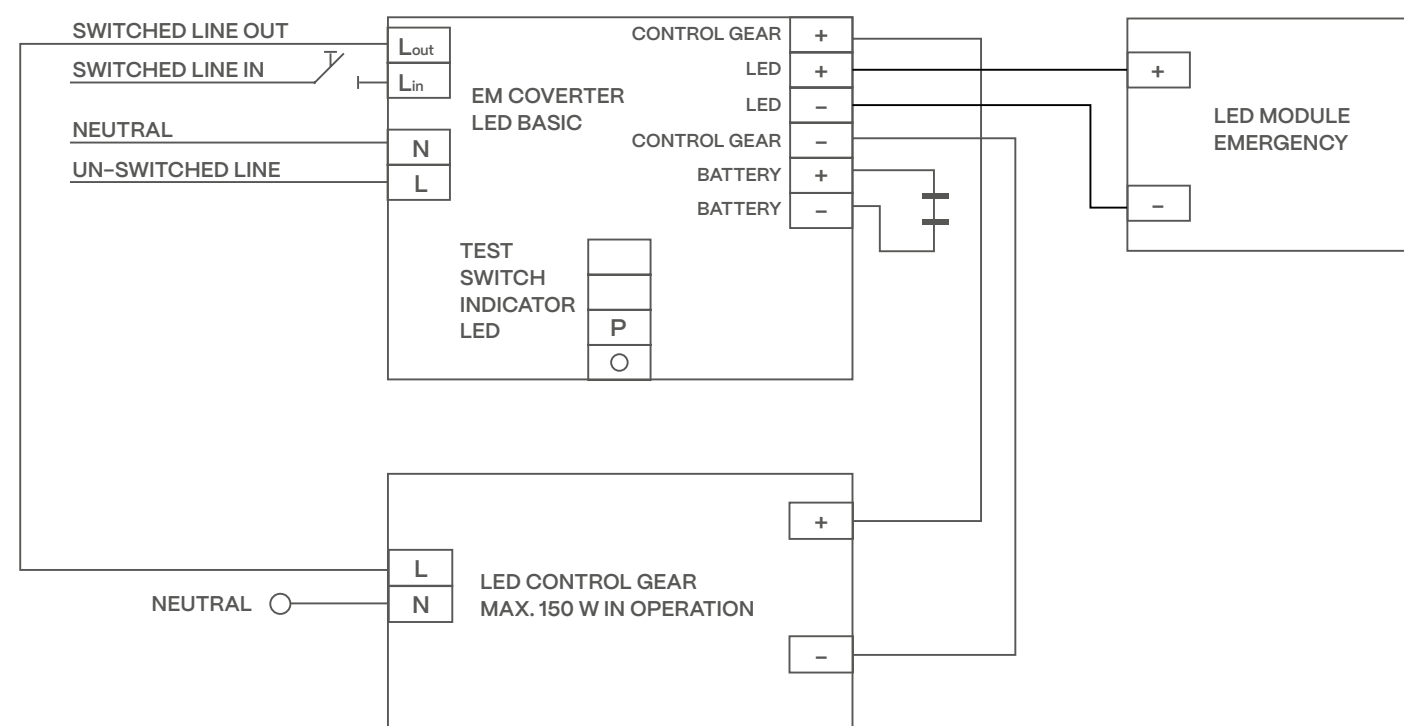

ARE BPM LIGHT FIXTURES APPROVED ACCORDING TO STANDARD?

Please note that BPM Lighting luminaires are not in any case, emergency luminaires approved according to the EN-60598-2.22. Our emergency kits provide low anti-panic lighting for between one and three hours in case of a ma in power failure (see ref. ACKITLED1H and ref. ACKITLED3H).


¿SON LAS LUMINARIAS DE BPM HOMOLOGADAS SEGÚN LA NORMA?

Las luminarias de BPM que llevan kit de emergencia en ningún caso son luminarias de emergencia homologadas según la norma EN-60598-2-22. Los kits de emergencia suministrados permiten mantener una iluminación reducida antipánico, durante 1 o 3 horas en caso de fallos de suministro eléctrico de la red (ver ref. ACKITLED1H y ref. ACKITLED3H).

CONNECTING YOUR EQUIPMENT...

CÓMO CONECTO?

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

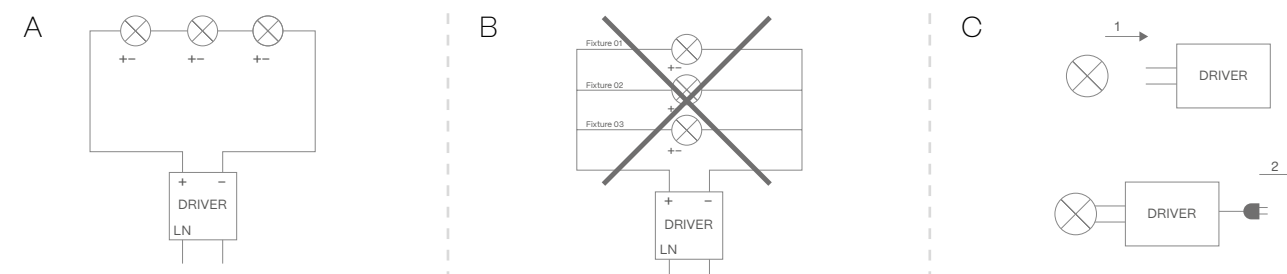

EMERGENCY KIT

There are two types of emergency lighting: Centralised and single emergency lighting

CENTRALISED EMERGENCY LIGHTING

A large battery or generator supplies energy to the emergency lighting fixtures via a specially protected power supply. In this case, the drivers have a DC recognition function that uses the input voltage to detect the emergency mode. The driver automatically turns on the DC mode and controls the light to the set DC level. The DC lighting level is generally 15% of nominal. When the installation enters DC mode, all the sensors stop working.

WHAT DO I NEED?

You only need one DC-ready driver in addition to AC-mode, which is used during normal operation of the lighting fixture. An additional battery or generally must be installed to connect the light fixture driver.

DECENTRALISED EMERGENCY LIGHTING

This does not have its own mains supply. An emergency kit consisting of emergency lighting equipment, a battery and LED indicator is required.

HOW DOES THE EMERGENCY KIT WORK?

The emergency kits supplied by BPM are for permanent use, and work normally with your driver and when the general mains network fails. The emergency kit driver detects there is voltage in the network and allows the lighting fixture driver work under normal conditions. In case of a power failure in the grid, the emergency kit driver releases the energy in the battery to power the LEDs.

WHAT DO I NEED?

You need a lighting fixture, its driver and LEDs and an emergency kit. The battery in the emergency kit must be installed separately from the lighting fixture and there must be a space to locate it.

HOW MANY EMERGENCY KITS DO I NEED?

An emergency kit can supply one driver with less than 150W.

If the lighting fixture has more than one driver and full lighting is required, you need the same number as emergency kits as drivers in the light fixture.

If only one kit is fitted, only the part of the lighting fixture that is associated with the driver will light up.

KIT DE EMERGENCIA

Existen dos tipos de iluminación de emergencia:

Iluminación de emergencia de alimentación centralizada y descentralizada

EMERGENCIA CENTRALIZADA

Una batería grande o generador suministran la energía necesaria para la iluminación de emergencia a través de una red de suministro con una protección especial. En este caso los drivers tienen una función de reconocimiento DC que usa el voltaje de entrada para detectar el modo de emergencia. El driver automáticamente enciende el modo DC y regula la luz al nivel definido DC. Generalmente el nivel DC de iluminación es del 15% del nominal. Cuando la instalación entra en modo DC todos los sensores dejan de funcionar.

¿QUÉ NECESITO?

Sólo se necesita un driver preparado para trabajar en modo DC además de en modo AC, que será el que se use durante el funcionamiento habitual de la luminaria. La instalación debe de estar preparada con una batería o generador adicional donde conectar el driver de la luminaria.

EMERGENCIA DESCENTRALIZADA.

No cuenta con una red de alimentación propia. Se necesita de kit de emergencia compuesto por un equipo de iluminación de emergencia, una batería y un indicador LED.

¿CÓMO FUNCIONA EL KIT DE EMERGENCIA?

Los Kit de emergencia suministrados por BPM son de uso permanente, es decir, funciona normalmente con su driver y además cuando falla la red general. El driver del Kit de emergencia comprueba que hay tensión en la red dejando que el driver de la luminaria trabaje en condiciones normales de utilización. Cuando hay un fallo de suministro eléctrico en la red, el driver del kit de emergencia permite liberar la energía acumulada en la batería alimentando los LEDs.

¿QUÉ NECESITO?

Se necesita la luminaria compuesta de su driver y LEDs y un kit de emergencia. En cualquier caso, la batería de los Kit de emergencia debe de ir externa a la luminaria por lo que se debe de prever un espacio para su alojamiento

¿CUÁNTOS KIT DE EMERGENCIA NECESITO?

Con un kit de emergencia se puede dar servicio a un solo driver de potencia inferior a 150W. Si una luminaria lleva más de un driver y se requiere que se ilumine completamente se necesitarán tantos kits de emergencia como drivers lleve la luminaria. En este caso si sólo se coloca un kit se iluminará únicamente la parte de la luminaria que lleve asociado el driver con el kit de emergencia.

DIMMING OPTIONS

CÓMO REGULO?

1.10V

How does it work?

The driver generates a 1V (minimum) to 10V (maximum) analogue signal a dimmer switch controller. Dimming from 1 to 100%.

What do I need?

You need an L and N power source plus two control cables with + and – polarity and a compatible 1. 10V controller. To switch off, install an ON–OFF switch with a 0.10V driver.

Can I dim the lights in more than one place?

It is not possible to control your lights from more than one point when you install a controller. A conventional switch can be used to switch on and off from several points, but only one of them can be a dimmer.

PHASE CUT

How does it work?

Lights are dimmed by cutting the mains voltage at the beginning (leading) or the end (trailing) of the phase. Dimming: 10/20–100% depending on driver. The driver may make a noise when dimmed and flickering can occur at the lowest levels.

What do I need?

You only need an L and N power source. An additional control cable is not required, but a phase cut–off regulator is. The dimmer switch must be LED compatible. Always consider the compatibility of the dimmer switch with the driver and whether it is cutting at the trailing or leading end of the phase. The dimmer switch supplier can advise on compatibility.

Can I dim the lights in more than one place?

No. You cannot have more than one dimmer switch. You can only have one from a conventional ON–OFF switch (on and off only).

PUSH

How do they work?

The lights are dimmed with a switch, which is usually on. Press the push button quickly to turn the light on or off, and hold it in for the dimming function. The range is from 1–5% to 100%. Lighting may go out of synch when a single push button is used. It can usually be synchronised again by holding the button in for a specific time or using a pulse sequence determined by the driver.

What do I need?

All you need is a conventional push button without a pilot light. No additional control pads are required. PUSH dimmer switches require an L and N power supply plus an additional cable back to the push button. In some cases the driver

needs an additional neutral input which must be bridged with the installation neutral.

Can I control my lights from more than one push button?

You can install several push buttons in a row for multi–point control. In this case, the wire back to the button must enter each driver in parallel and must not be bridged from driver to driver. You can connect numerous lights to a single button, but the more lights you connect, the greater the risk of loss of synchronisation. The number of devices controlled by a push button depends on the driver (ask the technical team).

DALI

How does it work?

The Digital Addressable Lighting Interface (DALI) system allows you to control each DALI device. By device, we mean the driver and the sensor (not the luminaire). It uses a low–voltage bidirectional communication protocol to send and receive messages. DALI digitally controlled by a standard lighting control protocol under the IEC 62356 standard. Control from 1–5% to 100% DALI keeps your lighting in sync.

Features:

DALI devices per BUS: 64
Number of DALI groups per BUS: 16
Number of DALI scenarios per BUS: 16
DALI Voltage: 9.5–22.5v, typically 16V
DALI system current: Max. 250 mA.
Maximum cable length: 300 m with a cross–section of 1.5 mm2

What do I need?

You need an L and N power supply plus two control signal wires. These control cables must be powered by a DALI BUS. You also need regulators with DALI protocol support.

Can I dim the lights in more than one place?

There are two options: By means of DALI panels/interfaces directly connected to the DALI BUS that consume a DALI address for each panel placed and must be programmed; or through DALI dimmer switches that are connected to 230VAc and work by means of short presses to turn on/off and long presses to dim.



DIMMING OPTIONS

CÓMO REGULO?

1.10V

¿Cómo funciona?

El driver genera una señal analógica de 1V (mínimo) a 10V (máximo) que llega a un controlador que regula la intensidad lumínica). Regulación del 1 al 100%.

¿Qué necesito?

Se necesita una alimentación L y N más dos cables de control con polaridad + y – y un controlador compatible 1.10V Si se quiere apagar se necesita colocar un regulador con ON–OFF o bien regular mediante driver 0.10V.

¿Puedo regular desde varios puntos?

No es posible regular desde varios puntos cuando se coloca un controlador. Se puede utilizar un interruptor convencional conmutado de manera que se pueda encender y apagar desde varios puntos pero sólo uno de ellos podrá regular.

CORTE DE FASE

¿Cómo funciona?

La regulación se realiza mediante corte de la onda de la tensión de red al inicio (leading) o al final (trailing) de la fase. Regulación: 10/20–100% dependiendo del driver. Puede generar ruido en el driver y al regular la intensidad al mínimo puede general flickering.

¿Qué necesito?

Sólo necesita alimentación L y N. No necesita cable adicional de control, pero sí un regulador de corte de fase. El regulador debe de ser compatible con LED. Se debe de tener en cuenta la compatibilidad del regulador con el driver y si es corte por trailing o leading. Dicha compatibilidad la dará el proveedor del regulador.

¿Puedo regular desde varios puntos?

No se puede regular desde varios puntos. Sólo se puede regular desde un punto y conmutar el ON–OFF desde el interruptor convencional (sólo para encender y apagar).

PUSH

¿Cómo funciona?

Regulación a través de un pulsador normalmente abierto. La regulación se realiza con pulsaciones cortas para apagar/encender y una pulsación mantenida para el control de la intensidad lumínica. Regulación del 1–5% al 100%. Puede aparecer desincronización en la regulación de las luminarias con un solo pulsador. Se suele re–sincronizar generalmente con una pulsación mantenida durante un tiempo determinado o con una secuencia de pulsación determinada según el driver.

¿Qué necesito?

Se requiere de pulsadores convencionales sin piloto de luz y no necesita ningún tipo de pastilla de regulación adicional.

La regulación PUSH necesita de alimentación L y N más un cable adicional de vuelta al pulsador. En algunos casos el driver puede necesitar una entrada adicional de neutro que debe de puentearse con el neutro de la instalación.

¿Puedo regular desde varios puntos?

Es posible colocar varios pulsadores en paralelo para control desde varios puntos. En este caso, el cable de vuelta al pulsador debe entrar a cada driver en paralelo y no se debe de puentear de un driver a otro. Es posible colocar varios equipos a un mismo pulsador, pero a mayor cantidad de equipos mayor riesgo de desincronización. El número de equipos soportados por un pulsador dependerá del driver (Consultar con el equipo técnico).

DALI

¿Cómo funciona?

El sistema de regulación DALI (Digital Adresable Lighting Interface) permite el control de cada dispositivo DALI. Se entiende por dispositivo el driver y el sensor (no la luminaria). Utiliza un protocolo de comunicación bidireccional de bajo voltaje que permite enviar y recibir mensajes. Se regula de forma digital mediante un protocolo estándar de control de iluminación bajo el estándar IEC 62356. Regulación del 1–5% al 100% Con DALI se evita cualquier tipo de desincronización.

Características:

Dispositivos DALI por cada BUS: 64
Cantidad de grupos DALI por cada BUS: 16
Cantidad de escenas DALI por cada BUS: 16
Tensión DALI: 9.5–22.5v, normalmente 16V
Corriente del sistema DALI: máx. 250mA.
Máxima longitud del cable: 300m con una sección transversal de 1.5mm2

¿Qué necesito?

Necesita alimentación L y N más dos cables de señal de control. Estos cables de control deben de estar alimentados mediante un BUS DALI. Además, son necesarios reguladores que deben de indicar su compatibilidad con protocolo DALI.


¿Puedo regular desde varios puntos?

Existen dos opciones: Mediante paneles/interfaces DALI conecta–dos directamente al BUS DALI que consumen una dirección DALI por cada panel colocado y que deben de ser programados; o a través de interruptores reguladores DALI que van conectados a 230VAc y funcionan mediante pulsaciones cortas para encender/ apagar y pulsaciones mantenidas para regular.


TECH RECOMENDATIONS

RECOMENDACIONES TÉCNICAS


PUSH: OPTION 1




PUSH: OPTION 2




DALI



1-10 V



PHASE CUT



IP DEGREE OF PROTECTION

GRADO DE PROTECCIÓN IP

As IEC 60529 standard says, the IP protection degree specifies the different protection levels provided by the containers that protect the components in electrical or electronic equipment. The greater the IP protection degree, the more protected the equipment is. An IP XY protection degree indicates the following:

X: Describes the level of protection against dust and other particles

X	PROTECTION GRADE AGAINST DUST	GRADO DE PROTECCIÓN CONTRA POLVO
0	Without protection	Sin protección
1	Protected against solids bigger than 50 mm	Protegida contra sólidos de más de 50 mm
2	Protected against solids bigger than 12 mm	Protegida contra sólidos de más de 12 mm
3	Protected against solids bigger than 2,5 mm	Protegida contra sólidos de más de 2,5 mm
4	Protected against solids bigger than 1 mm	Protegida contra sólidos de más de 1 mm
5	Protection against the entrance of dust	Protegida contra la entrada de polvo
6	Full protected against dust	Totalmente protegida del polvo

Y: Describes the level against liquids

Y	PROTECTION GRADE AGAINST LIQUIDS	GRADO DE PROTECCIÓN CONTRA LÍQUIDOS
0	Without protection	Sin protección
1	Protected against drops of water falling vertically	Protegida contra la caída vertical de gotas de agua
2	Protected against drops of water falling at a maximum inclination of 15°	Protegida contra la caída de gotas de agua con inclinación máxima de 15°
3	Protected against sprayed water	Protegida contra agua pulverizada
4	Protected against splashes of water	Protegida contra las proyecciones de agua
5	Protected against jets of water	Protegida contra los chorros de agua
6	Protected against high tide	Protegida contra mar gruesa
7	Protected against plunging effects	Protegida contra los efectos de la inmersión
8	Protected against long immersion	Protegida contra la inmersión prolongada

*Specialized cleaning procedures are not covered by IP ratings. It is recommended that manufacturers provide, if necessary, adequate information regarding cleaning procedures. This is in accordance with the recommendations contained in IEC 60529 for special cleaning procedures.

Según la Norma IEC 60529, el grado de protección IP especifica los diferentes niveles de protección aportados por los contenedores que resguardan los componentes de los equipos eléctricos o electrónicos. Cuanto mayor es el grado de protección IP, más protegido está el equipamiento. Un grado de protección IP XY indica lo siguiente:


X: Describe el nivel de protección contra polvo y otras partículas

Y: Describe el nivel de protección contra líquidos

*Los procedimientos especializados de limpieza no están cubiertos por los grados de protección IP. Se recomienda que los fabricantes suministren, si es necesario, una adecuada información en lo referente a los procedimientos de limpieza. Esto está de acuerdo con las recomendaciones contenidas en la Norma IEC 60529 para los procedimientos de limpieza especiales.

TECH RECOMENDATIONS

RECOMENDACIONES TÉCNICAS

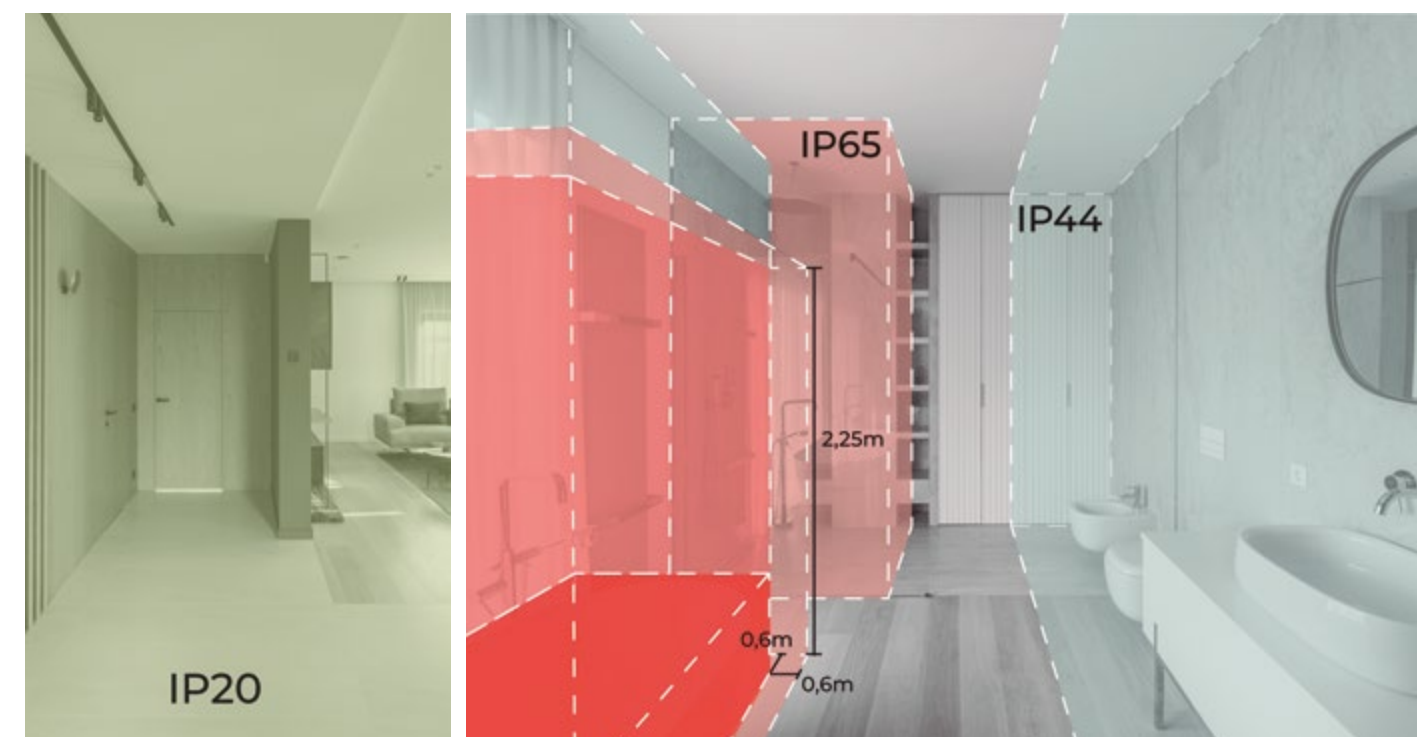



SCAN TO FIND OUT MORE DETAIL ABOUT OUR PRODUCTS.
ESCANEA Y DESCUBRE TODO SOBRE NUESTROS PRODUCTOS.

BPM Lighting S.L. reserves the right to reproduce total or partially this catalogue as Copyright owner.

The content is up to date at the day of print, nevertheless, due to continuous product development and improvement, BPM Lighting reserves the right to alter it without prior notice.

Last catalogue version in bpmlighting.com
Design and layout BPM Lighting Team

BPM Lighting S.L. se reserva el derecho de reproducción total o parcial de este catálogo como propietario del Copyright.

El contenido está actualizado en la fecha de impresión, sin embargo, debido al continuo desarrollo y mejora de los productos, BPM Lighting se reserva el derecho de modificarlo sin previo aviso.

*Última versión de catálogo en bpmlighting.com
Diseño y maquetación Equipo BPM Lighting*