





PROFILES

onoklighting.com/es/line

En Onok contamos con una gama amplia de perfilera en aluminio, donde destaca su calidad y variedad de productos que pueden encajar en diferentes necesidades. Esta abundante familia cuenta con productos empotrables, superficie, frameless y colgantes, también las podrás encontrar con diferentes longitudes, potencias y flujos lumínicos que se pueden ajustar más a lo que tus proyectos requieren.

In Onok Lighting we have a wide range of aluminum profiles; this product has a magnificent quality and variety that can fit different needs.

This wide family has recessed products, surface, frameless and pendants, you can also find them with different lengths, powers and light flows that can be adjusted to each project





Adot
P.93



Line
P.96



Line Track
P.101



Line E
P.103



Line E IP54
P.107



Line R
P.108



Bell
P.115


NEW DIFFUSER
UGR<19
MICROPRISMATIC
ANTI-GLARE
LINE-LINE R-LINE E
AVAILABLE!!!
DISPONIBLE!!!

Menos empalmes, menos juntas, en Onok renovamos nuestro perfil más popular, con medidas más largas que se adaptan a esos proyectos donde tus líneas no tienen fin, además hemos incorporado un nuevo difusor microprismático en PMMA diseñado para proyectos con necesidades de UGR bajos.

More lengths mean less union joints, in Onok Lighting we renovate our most popular profile, with longer measure that can be adapted better to those projects where your lines have no end, we had also incorporated a new microprismatic diffuser in PMMA designed for projects with low UGR needs.



LINE PROFILES

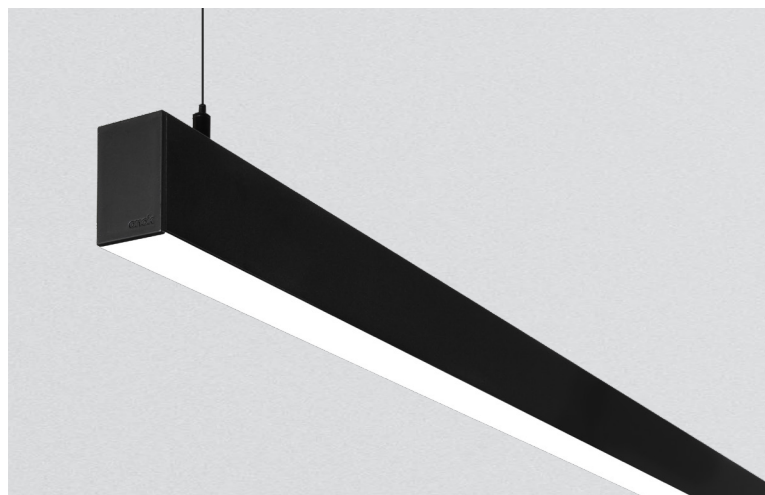


	W	mm	mA	TEMP	LUM	CRI
LINE_07	14	705	250	3.000K	2.325	>85
				4.000K	2.499	
LINE_11	22	1.125	250	3.000K	3.720	>85
				4.000K	3.999	
LINE_14	28	1.405	250	3.000K	4.650	>85
				4.000K	4.998	
LINE_18	35	1.825	250	3.000K	6.045	>85
				4.000K	6.498	
LINE_22	45	2.245	250	3.000K	7.440	>85
				4.000K	7.998	
LINE_28	56	2.810	250	3.000K	9.300	>85
				4.000K	9.997	

Para medidas mas largas de 2810 mm, utilizar combinaciones de perfiles.
For longer measurements of 2245 mm You have to use combination of differents profiles.


IMPORTANTE: Una alimentación para máximo 10 metros. / ATTENTION: Maximum 10 meters per one power supply.

TEC.DRAWINGS


Pendant Version

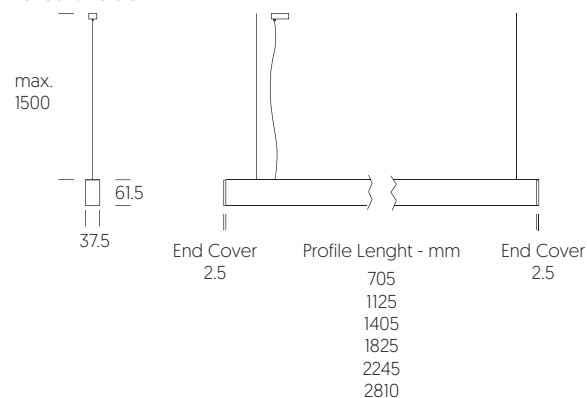

Surface Version

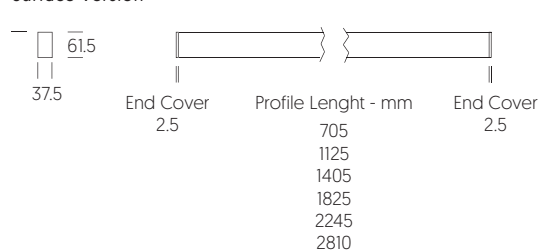

Pendant Bar

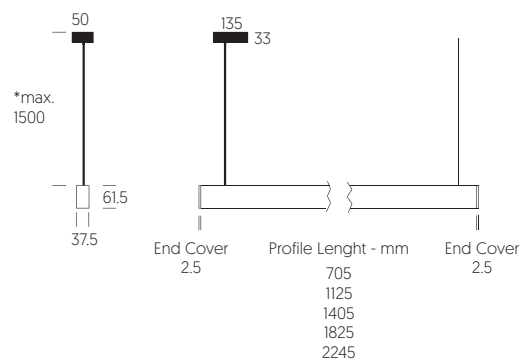

**Se debe definir longitud de barra, el usuario no puede modificar la longitud / Bar length must be defined, the user cannot modify the length.



LED		230V	IP20	60.000h L80	McAdam C3					
≈ 14W	> 2.000lm	LNEX	A	07	•	•	9	•	•	•
≈ 22W	> 3.000lm	LNEX	A	11	•	•	9	•	•	•
≈ 28W	> 4.000lm	LNEX	A	14	•	•	9	•	•	•
≈ 36W	> 6.000lm	LNEX	A	18	•	•	9	•	•	•
≈ 45W	> 7.000lm	LNEX	A	22	•	•	9	•	•	•
≈ 56W	> 9.000lm	LNEX	A	28	•	•	9	•	•	•

BASIC OPTIONS

	N	No Dimmable								
	3	3000K								
	9	120°								
	A	Ice Difusser								
	WS	Satin White	LNEX	A	•	•	N	3	9	A WS
	BS	Satin Black	LNEX	A	•	•	N	3	9	A BS

CUSTOMIZE OPTIONS

LED CONTROL


	F	Dimmable Push	LNEX	A	•	•	F	•	9	•	•
	D	Dimmable Dali	LNEX	A	•	•	D	•	9	•	•

LED COLOR TEMPERATURE

	4	4000K	LNEX	A	•	•	•	4	9	•	•
--	----------	-------	------	---	---	---	---	----------	----------	---	---


COMPLEMENTS CODES

PENDANT VERSION




Interior Joint NO-DIM
1.5Meters LNEUXNXXELUN1
2.0Meters LNEUXNXXELUN2

Interior Joint DIM
1.5Meters LNEUXDXXELUD1
2.0Meters LNEUXDXXELUD2




Electrical Susp. DIM

1.5Meters LNEKKSED150BS Black
1.5Meters LNEKKSED150WS White
*5Meters LNEKKSED500BS Black
*5Meters LNEKKSED500WS White




Electrical Susp. NO-DIM

1.5Meters LNEKKSEN500BS Black
1.5Meters LNEKKSEN150WS White
*5Meters LNEKKSEN500BS Black
*5Meters LNEKKSEN500WS White



Kit Suspension

1.5Meters LNEKKSUP150BS Black
1.5Meters LNEKKSUP150SS Silver
*5Meters LNEKKSUP500BS Black
*5Meters LNEKKSUP500SS Silver





Kit Susp. Bar


NO DIM LNEKBSEN150BS Black
NO DIM LNEKBSEN150WS White
DALI LNEKBSED150BS Black
DALI LNEKBSED150WS White

SINGLE VERSION

Line 07 - 14 - 18 - 22 - 28

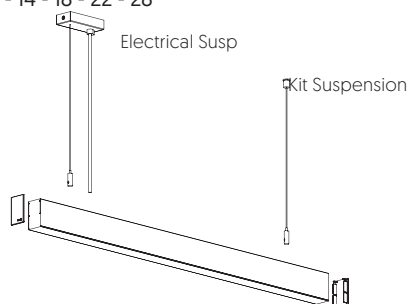


Line 07-11-14-18-22

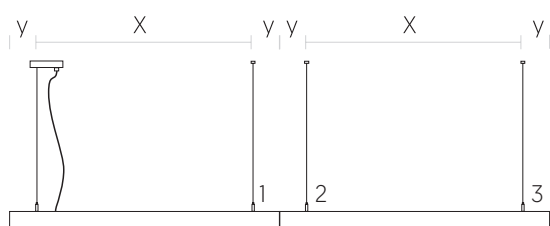

Line 32-37-42-46-50-66

CONTINUOUS VERSION

Line 32 - 37 - 42 - 46 - 50 - 56

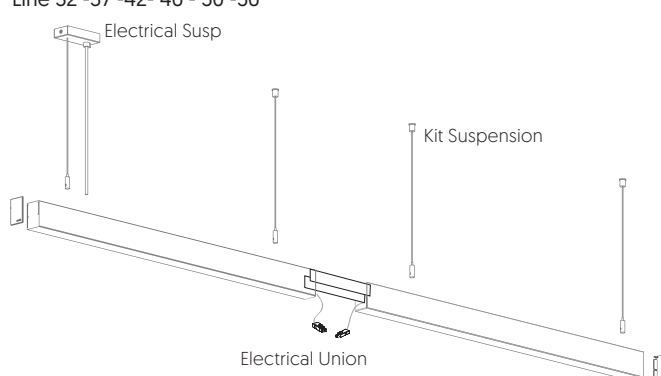


GUÍA COMPLEMENTOS/ COMPLEMENTS GUIDE


Ref.	Lenght	Elect Susp	Kit Susp.	Ele.Union	X	Y
Line 07	07	705 mm	1	1	-	605 50
Line 11	11	1.125 mm	1	1	-	1025 50
Line 14	14	1.405 mm	1	1	-	1.305 50
Line 18	18	1.825 mm	1	1	-	1.725 50
Line 22	22	2.245 mm	1	1	-	2.125 50
Line 28	28	2810 mm	1	1	-	2.710 50
Line 32	14+18	3.230 mm	1	3	1.5m	50
Line 37	18+18	3.650 mm	1	3	2m	50
Line 42	28+14	4.215 mm	1	3	1.5m	50
Line 46	28+18	4.635 mm	1	3	1.5m	50
Line 50	28+22	5.055 mm	1	3	1.5m	50
Line 56	28+28	5.620 mm	1	3	1.5m	50

COMPLEMENTS CODES

SURFACE VERSION




Interior Joint NO-DIM
1.5Meters LNEUXNXXELUN1
2.0Meters LNEUXNXXELUN2



Interior Joint DIM
1.5Meters LNEUXDXXELUD1
2.0Meters LNEUXDXXELUD2


SINGLE VERSION

Line 07 - 14 - 18 - 22 - 28



CONTINUOUS VERSION

Line 32 - 37 - 42- 46 - 50 - 56

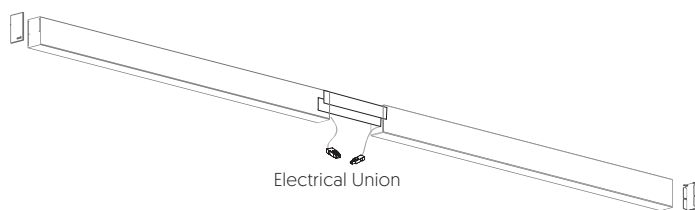


GUÍA COMPLEMENTOS/ COMPLEMENTS GUIDE


Ref.		Lenght (L)	Ele. Union
Line 07	[07]	710 mm	-
Line 11	[11]	1.135 mm	-
Line 14	[14]	1.415 mm	-
Line 18	[18]	1.835 mm	-
Line 22	[22]	2.255 mm	-
Line 28	[28]	2.820 mm	-
Line 32	[14+18]	3.240 mm	1.5m
Line 37	[18+18]	3.660 mm	2m
Line 42	[28+14]	4.225 mm	1.5m
Line 46	[28+18]	4.645 mm	1.5m
Line 50	[28+22]	5.065 mm	1.5m
Line 56	[28+28]	5.630 mm	1.5m

ACCESSORIES

LINE Q-CORNER

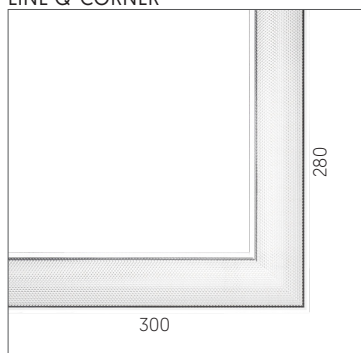


≈ 10W >1.660lm CRI>85

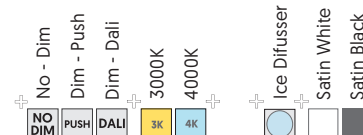

LNQX A10 N F D 3 4 X A WS BS



PROFILES

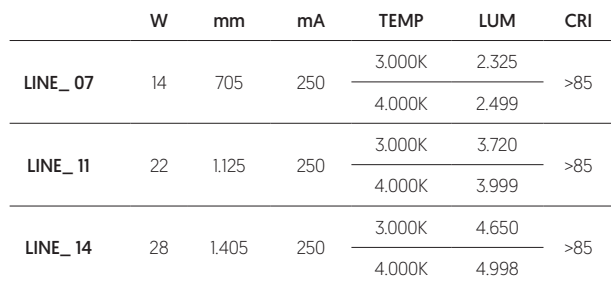

Technical drawing of a profile with dimensions:

- End Cover: 2.5
- Profile Length-mm: 705, 1125, 1405
- End Cover: 2.5
- Dimensions: 37.5, 61.5

DETAIL PHOTO



LED		230V	IP20	 60.000h L80	McAdam C3						
		≈ 14W	> 2.000lm	LNET	A	07	•	•	9	•	••
		≈ 22W	> 3.000lm	LNET	A	11	•	•	9	•	••
		≈ 28W	> 4.000lm	LNET	A	14	•	•	9	•	••


	N	No Dimmable
	3	3000K
	9	120°
	A	Ice Difusser
	WS	Satin White
	BS	Satin Black

LED CONTROL

DALI	D	Dimmable Dali	LNET	A	..	D	.	9	.	..
-------------	----------	---------------	------	---	----	----------	---	---	---	----

LED COLOR TEMPERATURE

4K	4	4000K	LNET	A	..	.	4	9	.	..
-----------	----------	-------	------	---	----	---	----------	---	---	----

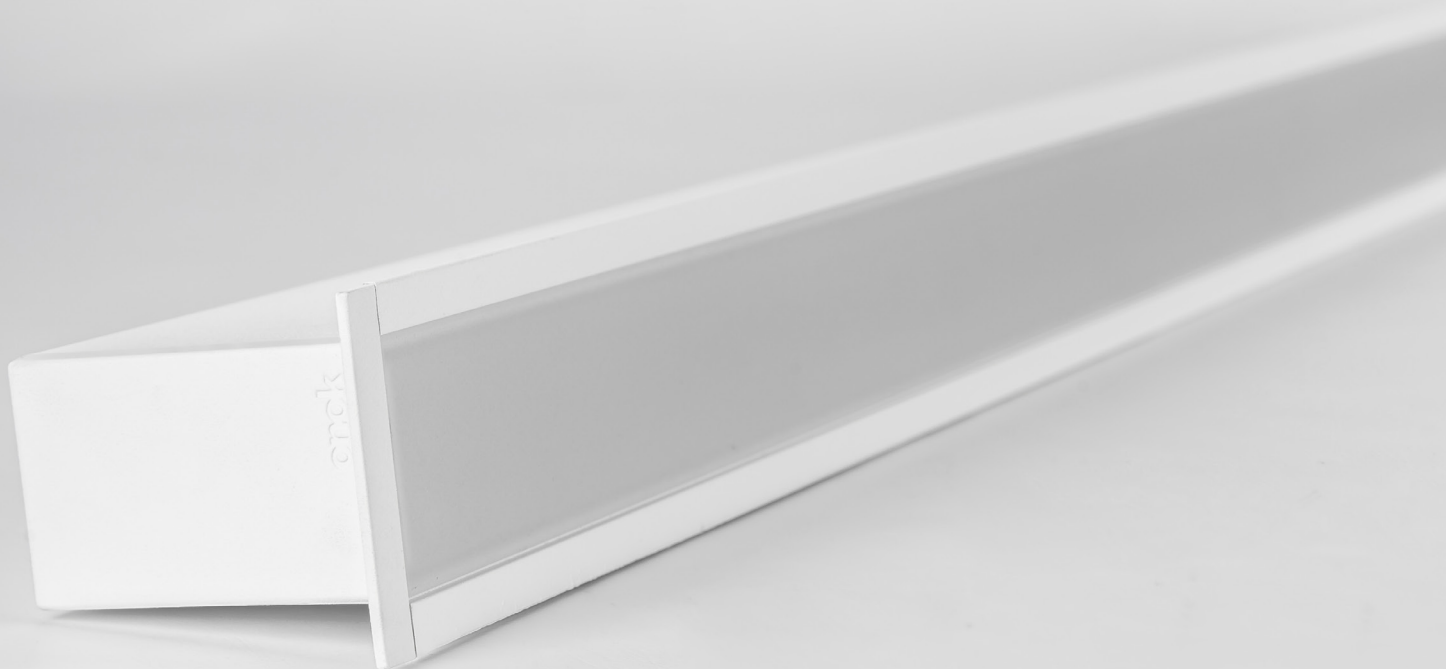

LINE E PROFILES

Perfil empotrado de extrusión de aluminio con difusor de PMMA en opciones opal y microprismática, disponible en varias longitudes y potencias, está diseñado para ensamblar líneas continuas.


Aluminum recessed profile with PMMA diffuser in opal and microprismatic options, available in various lengths and Powers, it is designed to assemble continuous lines.

LINE E PROFILES



	W	mm	mA	TEMP	LUM	CRI
LINE_07	14	705	250	3.000K	2.325	>85
				4.000K	2.499	
LINE_11	22	1.125	250	3.000K	3.720	>85
				4.000K	3.999	
LINE_14	28	1.405	250	3.000K	4.650	>85
				4.000K	4.998	
LINE_18	35	1.825	250	3.000K	6.045	>85
				4.000K	6.498	
LINE_22	45	2.245	250	3.000K	7.440	>85
				4.000K	7.998	
LINE_28	56	2.810	250	3.000K	9.300	>85
				4.000K	9.997	

TEC.DRAWINGS

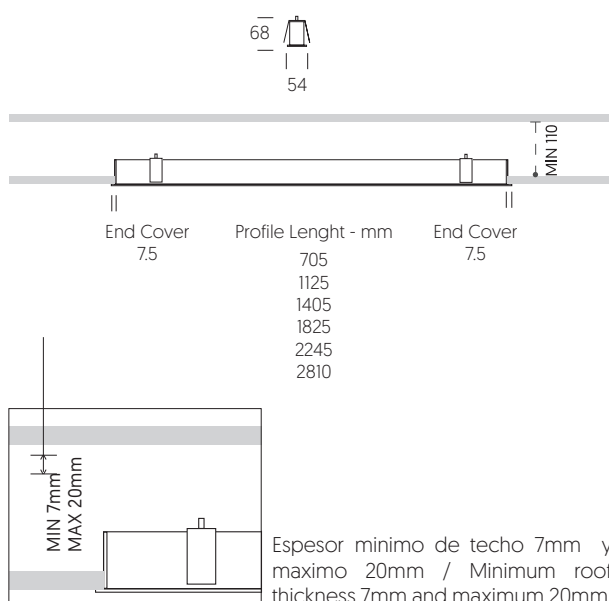

LED		230V	IP43 EXT	IP20 INT	 60.000h L80	McAdam C3					
		≈ 14W	> 2.000lm	LNXE	A	07	•	•	9	•	•
		≈ 22W	> 3.000lm	LNXE	A	11	•	•	9	•	•
		≈ 28W	> 4.000lm	LNXE	A	14	•	•	9	•	•
		≈ 36W	> 6.000lm	LNXE	A	18	•	•	9	•	•
		≈ 45W	> 7.000lm	LNXE	A	22	•	•	9	•	•
		≈ 56W	> 9.000lm	LNXE	A	28	•	•	9	•	•


BASIC OPTIONS

NO DIM	N	No Dimmable								
3K	3	3000K								
9	9	120°								
A	A	Ice Difusser								
WS	WS	Satin White	LNXE	A	•	•	N	3	9	A WS
BS	BS	Satin Black	LNXE	A	•	•	N	3	9	A BS


CUSTOMIZE OPTIONS

LED CONTROL											
PUSH	F	Dimmable Push	LNXE	A	•	•	F	•	9	•	•
DALI	D	Dimmable Dali	LNXE	A	•	•	D	•	9	•	•
LED COLOR TEMPERATURE											
4K	4	4000K	LNXE	A	•	•	•	4	9	•	•


COMPLEMENTS CODES



Interior Joint NO-DIM
1.5Meters LNEUXNXXELUN1
2.0Meters LNEUXNXXELUN2



Interior Joint DIM
1.5Meters LNEUXDXXELUD1
2.0Meters





Ceiling Bracket Line E
LNEEXXXRCKIT

SINGLE VERSION

Line 07 - 14 - 18 - 22 - 28

CONTINUOUS VERSION

Line 32 - 37 - 42 - 46 - 50 - 56

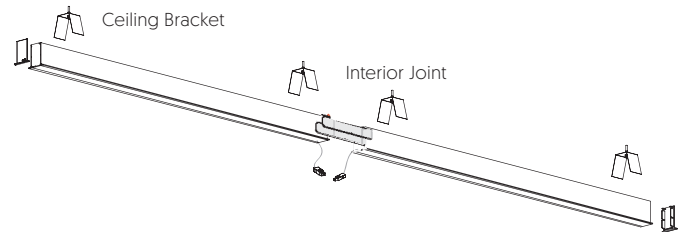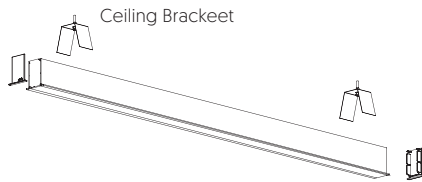

GUÍA COMPLEMENTOS/ COMPLEMENTS GUIDE

Ref.		Lenght		Ceiling strip	Ele. Union
Line 07	[07]	720 mm	730x42	2	-
Line 11	[11]	1.140 mm	1.150x42	2	-
Line 14	[14]	1.420mm	1.430x42	2	-
Line 18	[18]	1.840 mm	1.850x42	2	-
Line 22	[22]	2.260 mm	2.270x42	3	-
Line 28	[28]	2.825 mm	2.835x42	3	-
Line 32	[14+18]	3.245 mm	3.255x42	4	1.5m
Line 37	[18+18]	3.665 mm	3.675x42	4	2m
Line 42	[28+14]	4.230 mm	4.240x42	5	1.5m
Line 46	[28+18]	4.650 mm	4.660x42	6	1.5m
Line 50	[28+22]	5.070 mm	5.080x42	6	1.5m
Line 56	[28+28]	5.635 mm	5.645x42	6	1.5m

Para medidas mas largas de 5562 mm o mas de 2 perfiles consultar. / For longer measurements of 5562 mm or more than 2 profiles, please consult it.

IMPORTANTE: Una alimentación para máximo 10 metros. / **ATTENTION:** Maximum 10 meters per one power supply.




Nuestra familia Line, es ideal para iluminar esos espacios diáfanos y de gran amplitud, con lo que consigues una luz ambiental confortable y homogénea, haciendo resaltar todos los objetos del contexto.

Our Line family is perfect to illuminate those diaphanous spaces and great amplitude, after all you get a comfortable and homogeneous environmental light.



PROFILES



68

54

7.5

7.5

MIN 110

1000 Series End Cap


Profile Length - mm

705

1125


1405

Espesor minimo de techo 7mm y
maximo 20mm / Minimum roof
thickness 7mm and maximum 20mm.



LED CONTROL											
	N	No Dim	LNEI	A	14	N	.	9	.	..	
	F	Dimmable Push	LNEI	A	14	F	.	9	.	..	
	D	Dimmable Dali	LNEI	A	14	D	.	9	.	..	
LED COLOR TEMPERATURE											
	3	3000K	LNEI	A	14	.	3	9	.	..	
	4	4000K	LNEI	A	14	.	4	9	.	..	
LED BEAM ANGLE											
	9	120°	LNEI	A	14	.	.	9	.	..	
LED COMPLEMENTS											
	A	Ice Diffuser	LNEI	A	14	.	.	9	A	..	
COLOURS											
	WS	Satin White	LNEI	A	14	.	.	9	.	WS	
	BS	Satin Black	LNEI	A	14	.	.	9	.	BS	

LINE R PROFILES

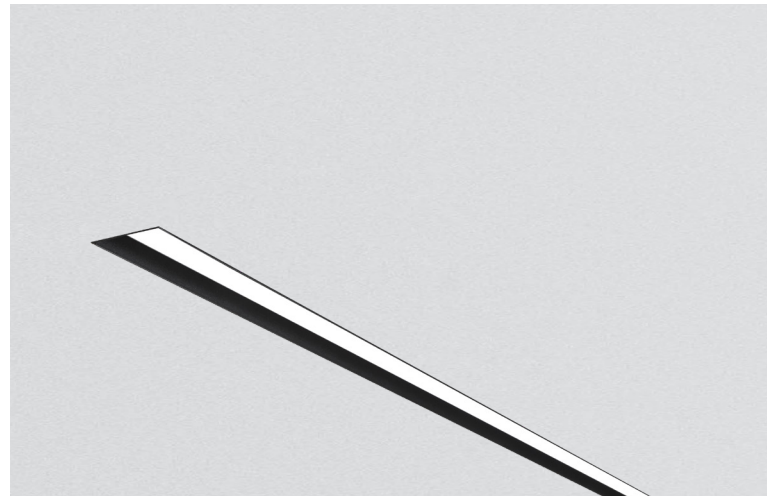

	W	mm	mA	TEMP	LUM	CRI
LINE_07	14	705	250	3.000K	2.325	>85
				4.000K	2.499	
LINE_11	22	1.125	250	3.000K	3.720	>85
				4.000K	3.999	
LINE_14	28	1.405	250	3.000K	4.650	>85
				4.000K	4.998	
LINE_18	35	1.825	250	3.000K	6.045	>85
				4.000K	6.498	
LINE_22	45	2.245	250	3.000K	7.440	>85
				4.000K	7.998	
LINE_28	56	2.810	250	3.000K	9.300	>85
				4.000K	9.997	


Para medidas mas largas de 2810 mm, utilizar combinaciones de perfiles.
For longer measurements of 2245 mm You have to use combination of differents profiles.

IMPORTANTE: Una alimentación para máximo 10 metros. / **ATTENTION:** Maximum 10 meters per one power supply.

TEC.DRAWINGS


IP20
EXT

Pendant Version

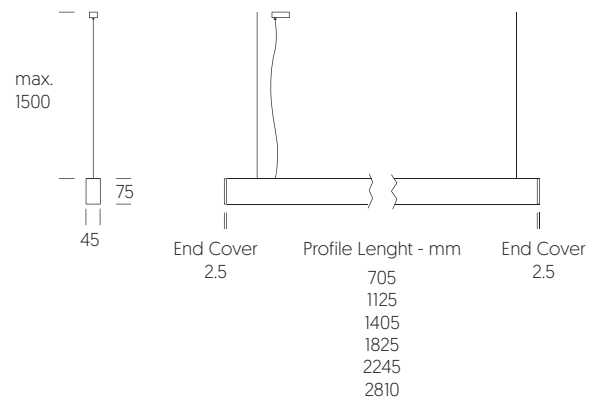


IP20
EXT

Surface Version

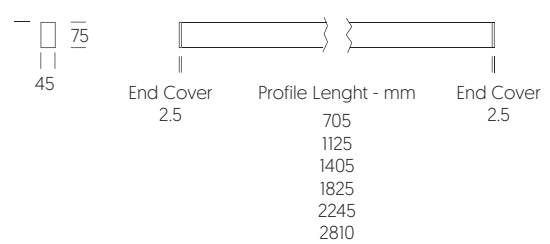


IP43
EXT

Frameless Version*

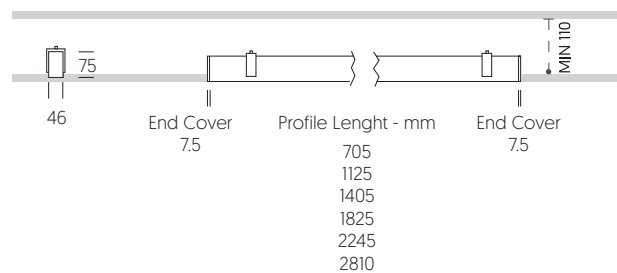



Pendant Bar

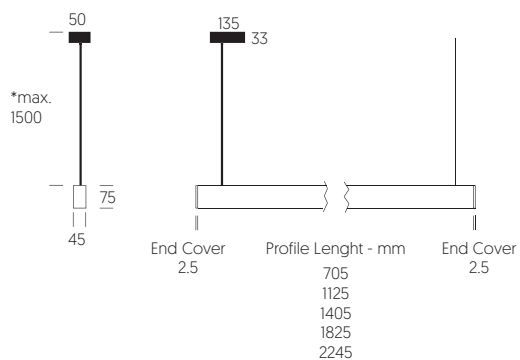

**Se debe definir longitud de barra, el usuario no puede modificar la longitud /
Bar length must be defined, the user cannot modify the length.

LED		230V	IP20		60.000h L80	McAdam C3					

BASIC OPTIONS

NO DIM	N	No Dimmable									
3K	3	3000K									
9	9	120°									
A	A	Ice Difusser									
WS	WS	Satin White	LNER	A	..	N	3	9	A	WS	
BS	BS	Satin Black	LNER	A	..	N	3	9	A	BS	

CUSTOMIZE OPTIONS


LED CONTROL

PUSH	F	Dimmable Push	LNER	A	..	F	.	9	.	..	
DALI	D	Dimmable Dali	LNER	A	..	D	.	9	.	..	

LED COLOR TEMPERATURE

4K	4	4000K	LNER	A	..	.	4	9	.	..	
----	---	-------	------	---	----	---	---	---	---	----	--


TECHNICAL DETAILS



Para techos de 12.5 mm/
Ceiling thickness 12.5 mm


COMPLEMENTS CODES

PENDANT VERSION




Interior Joint NO-DIM
1.5Meters LNRUXNXXELUN1
2.0Meters LNRUXNXXELUN2

Interior Joint DIM
1.5Meters LNRUXDXXELUD1
2.0Meters LNRUXDXXELUD2




Electrical Susp. DIM

1.5Meters LNEXKSED150BS Black
1.5Meters LNEXKSED150WS White
*5Meters LNEXKSED500BS Black
*5Meters LNEXKSED500WS White




Electrical Susp. NO-DIM

1.5Meters LNEXKSEN500BS Black
1.5Meters LNEXKSEN150WS White
*5Meters LNEXKSEN500BS Black
*5Meters LNEXKSEN500WS White



Kit Suspension

1.5Meters LNEXKSUP150BS Black
1.5Meters LNEXKSUP150SS Silver
*5Meters LNEXKSUP500BS Black
*5Meters LNEXKSUP500SS Silver





Kit Susp. Bar


NO DIM LNEXBSEN150BS Black
NO DIM LNEXBSEN150WS White
DALI LNEXBSED150BS Black
DALI LNEXBSED150WS White

SINGLE VERSION

Line 07 - 14 - 18 - 22 - 28

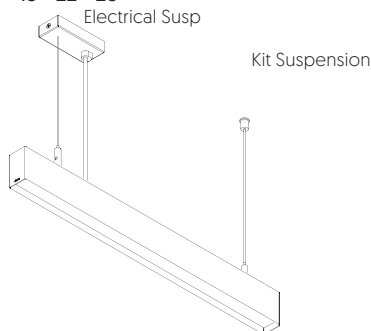


Line 07-11-14-18-22

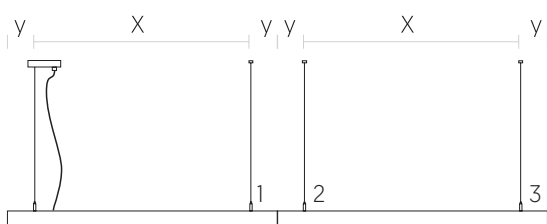

Line 32-37-42-46-50-66

CONTINUOUS VERSION

Line 32 -37 -42- 46 - 50 -56

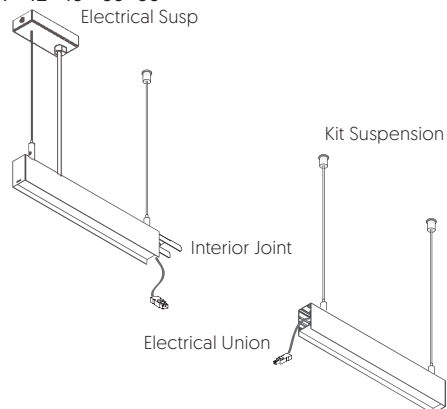


GUÍA COMPLEMENTOS/ COMPLEMENTS GUIDE


Ref.	Lenght	Elect Susp	Kit Susp.	Ele.Union	X	Y
Line 07	07	705 mm	1	1	-	605 50
Line 11	11	1.125 mm	1	1	-	1025 50
Line 14	14	1.405 mm	1	1	-	1.305 50
Line 18	18	1.825 mm	1	1	-	1.725 50
Line 22	22	2.245 mm	1	1	-	2.125 50
Line 28	28	2810 mm	1	1	-	2.710 50
Line 32	14+18	3.230 mm	1	3	1.5m	50
Line 37	18+18	3.650 mm	1	3	2m	50
Line 42	28+14	4.215 mm	1	3	1.5m	50
Line 46	28+18	4.635 mm	1	3	1.5m	50
Line 50	28+22	5.055 mm	1	3	1.5m	50
Line 56	28+28	5.620 mm	1	3	1.5m	50

COMPLEMENTS CODES


FRAMELESS VERSION



Interior Joint NO-DIM
1.5Meters LNRUXNXXELUN1
2.0Meters LNRUXNXXELUN2




Interior Joint DIM
1.5Meters LNRUXDXXELUD1
2.0Meters LNRUXDXXELUD2



Ceiling Bracket Line R
CCLICK15RW000


SINGLE VERSION

Line 07 - 14 - 18 - 22 - 28



CONTINUOUS VERSION

Line 32 - 37 - 42 - 46 - 50 - 56

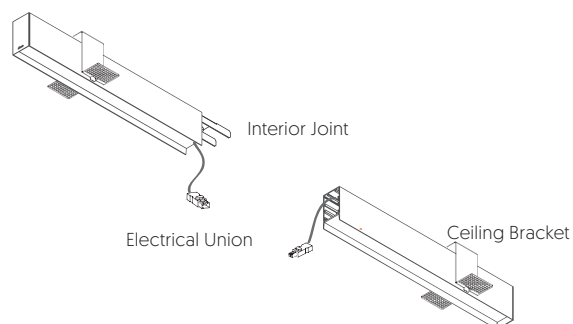


GUÍA COMPLEMENTOS/ COMPLEMENTS GUIDE


Ref.		Lenght (L)		Bracket	Int. Joint	Ele. Union
Line 07	[07]	710 mm	[L+10]x47	2	-	-
Line 11	[11]	1.135 mm	[L+10]x47	2	-	-
Line 14	[14]	1.415 mm	[L+10]x47	2	-	-
Line 18	[18]	1.835 mm	[L+10]x47	2	-	-
Line 22	[22]	2.255 mm	[L+10]x47	3	-	-
Line 28	[28]	2.820 mm	[L+10]x47	3	-	-
Line 32	[14+18]	3.240 mm	[L+10]x47	4	1	1.5m
Line 37	[18+18]	3.660 mm	[L+10]x47	4	1	2m
Line 42	[28+14]	4.225 mm	[L+10]x47	6	1	1.5m
Line 46	[28+18]	4.645 mm	[L+10]x47	6	1	1.5m
Line 50	[28+22]	5.065 mm	[L+10]x47	7	1	1.5m
Line 56	[28+28]	5.630 mm	[L+10]x47	8	1	1.5m

COMPLEMENTS CODES

SURFACE VERSION




Interior Joint NO-DIM
1.5Meters LNRUXNXXELUN1
2.0Meters LNRUXNXXELUN2



Interior Joint DIM
1.5Meters LNRUXDXXELUD1
2.0Meters LNRUXDXXELUD2


SINGLE VERSION

Line 07 - 14 - 18 - 22 - 28



CONTINUOUS VERSION

Line 32 - 37 - 42 - 46 - 50 - 56

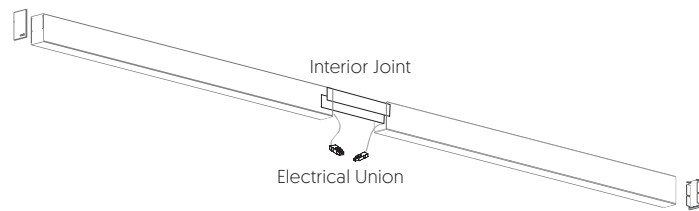

GUÍA COMPLEMENTOS/ COMPLEMENTS GUIDE

Ref.		Lenght (L)	Ele. Union
Line 07	[07]	710 mm	-
Line 11	[11]	1.135 mm	-
Line 14	[14]	1.415 mm	-
Line 18	[18]	1.835 mm	-
Line 22	[22]	2.255 mm	-
Line 28	[28]	2820 mm	-
Line 32	[14+18]	3.240 mm	1.5m
Line 37	[18+18]	3.660 mm	2m
Line 42	[28+14]	4.225 mm	1.5m
Line 46	[28+18]	4.645 mm	1.5m
Line 50	[28+22]	5.065 mm	1.5m
Line 56	[28+28]	5.630 mm	1.5m

LINE R PROFILES

Perfil de extrusión de aluminio y con un difusor en PMMA, el Line R destaca por su forma rehundida en la zona luminica, generando un efecto de confort visual evitando los incómodos deslumbramientos que algunas luminarias ofrecen.

Aluminum profile with diffuser in PMMA, the Line R stands out for the recessed shape in the light zone, it generates a visual comfort effect avoiding the uncomfortable glare that some luminaires offer in a place.

